

VP-413xl

Video to Computer Graphics Video ProScale™ Digital Scaler (up to WUXGA)




The **VP-413xl** a high-performance digital scaler for composite video and s-Video (Y/C) signals. The unit scales a video signal to a selectable computer graphics video on a 15-pin HD connector.

FEATURES

- Multi-Standard - PAL-B & NTSC (3.58).
- Input - Composite video and s-Video.
- Output - 1 computer graphics video on a 15-pin HD connector.
- Computer Graphics Output Resolutions - VGA (640x480), SVGA (800x600), XGA (1024x768), WXGA (1366x768), SXGA (1280x1024), UXGA (1600x1200) & WUXGA (1920x1200 PAL only).
- 3D De-Interlacer.
- 3D Comb Filter.
- Control - Front panel input source and output resolution buttons with LED status.
- Compact Kramer TOOLS™ - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

SCAN CONVERTERS & SCALERS

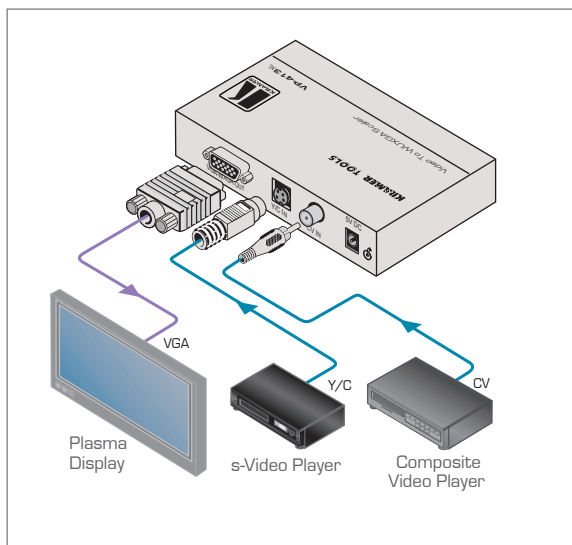

TECHNICAL SPECIFICATIONS

INPUT:	1 CV 1Vpp/75Ω on an RCA connector; 1 Y/C: 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C) on a 4-pin connector.
OUTPUTS:	1 VGA (VGA through WUXGA) on a 15-pin HD computer graphics video connector
OUTPUT RESOLUTION:	VGA (640x480), SVGA (800x600), XGA (1024x768), WXGA (1366x768), SXGA (1280x1024), UXGA (1600x1200), and WUXGA (1920x1200(Y) PAL only).
OUTPUT REFRESH RATE:	60Hz.
CONTROLS:	Push buttons and LEDs for selection of input source and output resolution.
POWER SOURCE:	5V DC, 800mA (typical).
DIMENSIONS:	12cm x 7.5cm x 2.5cm (4.7" x 2.95" x 0.98") W, D, H.
WEIGHT:	0.3kg (0.67lbs) approx.
ACCESSORIES:	Power supply.
OPTIONS:	RK-3T 19" rack adapter.

