

SL-1

Master Room Controller

NEW




The **SL-1** is a master room controller. It controls audio components, video components and other room facilities such as lights and screens.

FEATURES

- 2 Bidirectional RS-232 Ports - Control AV equipment such as projectors, LCD and PDP displays, power amplifiers, switchers and scalers.
- 3 Relay Contact Closure Ports - Conveniently control other room items related to the AV system such as raising and lowering drapes, the screen or the projector.
- IR Control - 1 input (3.5mm) & 2 outputs (terminal blocks).
- IR Learning Function - Learns commands from any IR remote.
- Kramer Site-CTRL™ Compatible - For network remote control and management using Kramer Site-CTRL software over the Ethernet port.
- K-NET™ Control Channel - For connecting compatible user interfaces and supplying power and control data over a single cable.
- USB Port - For uploading configuration file.
- Flexible Control - Ethernet, K-NET™, IR sensor and external IR commands.
- Compact Kramer TOOLS™ - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

CONTROL SYSTEMS

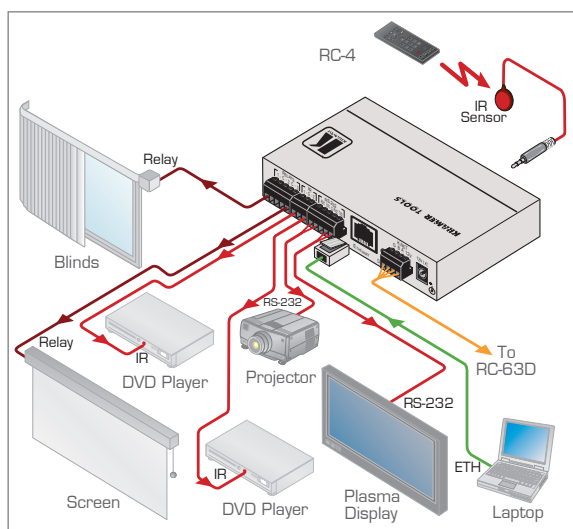

TECHNICAL SPECIFICATIONS

- INPUTS:** 2 RS-232 and 1 K-NET™ on terminal block connectors; Ethernet on an RJ-45 connector; 1 infrared sensor, 1 infrared on a 3.5mm mini jack connector; 1 USB for programming.
- OUTPUTS:** 2 infrared and 3 relays (36V AC or DC, 2A, 60V AC maximum on non-inductive load) on terminal block connectors.
- INDICATORS:** LED indicator for each function.
- POWER SOURCE:** 12V DC, 2A (from power supply) or 12V DC over K-NET™ connection.
- DIMENSIONS:** 12cm x 7.2cm x 2.4cm (4.7" x 2.8" x 1.0") W, D, H.
- WEIGHT:** 0.3kg (0.7lbs).
- ACCESSORIES:** Power supply, Kramer's Windows®-based configuration software, screwdriver.
- OPTIONS:** RK-3T 19" rack mount, RC-4 remote controller.

