


TP-220HD

1:2 Computer Graphics & HDTV Video Distribution Amplifier over Twisted Pair & Receiver



Compatible with HDTV component video signals when used with a breakout cable such as the Kramer C-GM/3RVF.

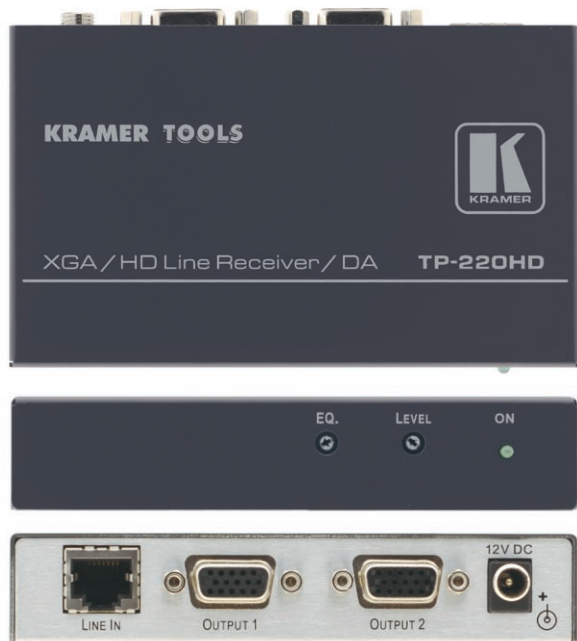


The **TP-220HD** is a high-performance twisted pair receiver for computer graphics signals with resolutions ranging from VGA through UXGA and higher as well as HDTV signals up to 1080p. It converts a twisted pair signal back into two identical signals in the original format.

FEATURES

- HDTV Compatible.
- Max. Resolution - WUXGA & 1080p.
- User Adjustable Sync Polarity Settings - H & V switches for improved HDTV compatibility with the CAT 5 outputs.
- Power Connect™ System - A single connection to the transmitter or the receiver powers both units when the devices are within 150ft (50m) of each other.
- Long System Range - Up to 100m (320ft).
- Twisted Pair Connector - RJ-45.
- Level (Gain) & EQ (Peaking) Control.
- Cable - UTP (unshielded twisted pair) or STP (shielded twisted pair) such as CAT 5.
- Compact Kramer TOOLS™ - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

RANGE EXTENDERS & REPEATERS

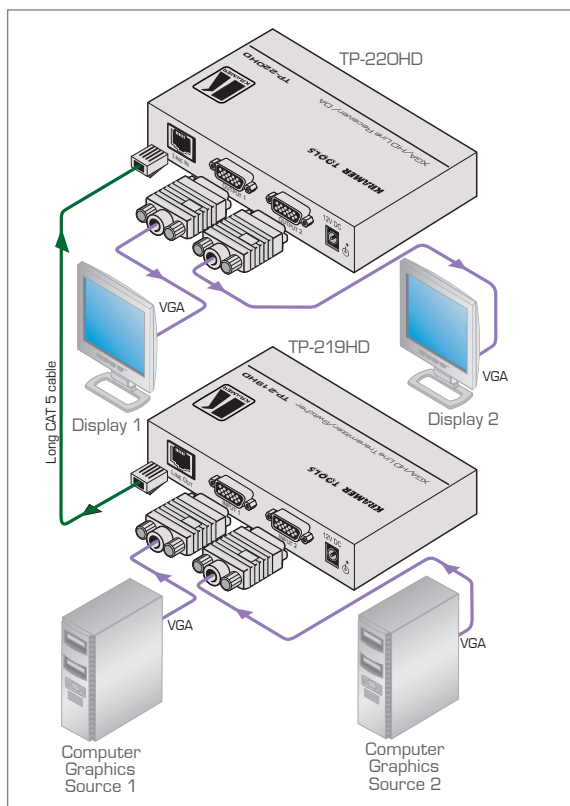

TECHNICAL SPECIFICATIONS

INPUT:	1 CAT 5 on an RJ-45 connector.
OUTPUTS:	2 XGA/HD on 15-pin HD (F) connectors.
MAX. OUTPUT LEVEL:	1.5Vpp.
MAX. RESOLUTION:	WUXGA & 1080p.
DIFF. GAIN:	2.3%.
DIFF. PHASE:	0.2Deg.
K-FACTOR:	0.1%.
S/N RATIO:	70dB @5MHz.
CROSSTALK (all hostile):	-45dB.
CONTROLS:	Level: -9.2dB to +2.1dB; EQ.: 0 to +29.5dB @50MHz.
COUPLING:	DC.
POWER SOURCE:	12V DC, 300mA, when feeding TP-219HD.
DIMENSIONS:	12.1cm x 7.18cm x 2.42cm (4.76" x 2.83" x 0.95") W, D, H.
WEIGHT:	0.3kg (0.67lbs) approx.
ACCESSORIES:	Power supply.
OPTIONS:	RK-3T 19" rack adapter.

