

## VS-4228


### 8-Port RS-422 Matrix Switcher



The **VS-4228** is a high-performance bidirectional matrix switcher for RS-422 control signals. It can connect multiple ports to create from one to four bidirectional communication groups.

#### FEATURES

- **Control** - Front panel, RS-232 (K-Router™ Windows®-based software is included), & RS-485.
- **Memory Locations** - Stores multiple switches as presets to be recalled and executed when needed.
- **Front Panel Control Lockout.**
- **Standard 19" Rack Mount Size - 1U.**

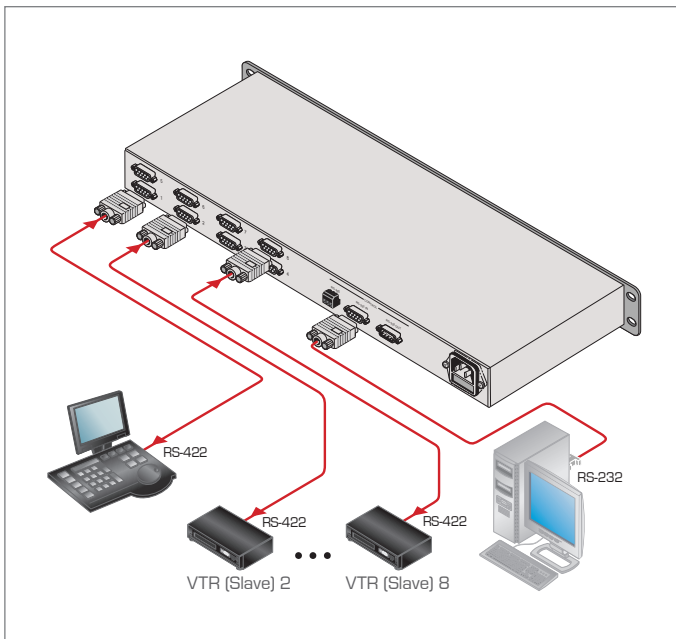

#### TECHNICAL SPECIFICATIONS

INPUT/OUTPUT:	8 in/out ports on 9-pin D-sub (F) connectors, fully compliant to TIA/EIA-422-B standard.
CONTROL:	Manual with push buttons on front panel, RS-485 and RS-232 serial interface (in and out).
DIMENSIONS:	19" x 7" x 1U W, D, H, rack mountable.
POWER SOURCE:	230V AC, 50/60Hz, (115V USA) 10VA.
WEIGHT:	2.2kg (4.88lbs approx).
ACCESSORIES:	Power cord, Windows®-based control program.

