


# FC-332

## 3G HD-SDI to HDMI Format Converter

NEW




The FC-332 is a format converter for HD-SDI signals. The unit converts an HD-SDI input with embedded audio to two HDMI outputs.

### FEATURES

- Input - 1 3G HD-SDI on a BNC connector.
- Outputs - 1 3G HD-SDI loop on a BNC connector, 2 HDMI connectors.
- HDTV Compatible.
- Looping Input.
- Multi-Standard Operation - SDI (SMPTE 259M), HD-SDI (SMPTE 292M) and 3G HD-SDI (SMPTE 424M) compliance and support for data rates of 270Mbps, 1483.5Mbps, 1485Mbps and 2970Mbps.
- Embedded Audio Group Select Rotary Switch.
- Active Input Indication™ Reporting - Green indicates a standard definition (SDI) input signal and blue indicates a high definition (HD-SDI) input signal.
- Compact DigiTOOLS™ - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

FORMAT & STANDARDS CONVERTERS

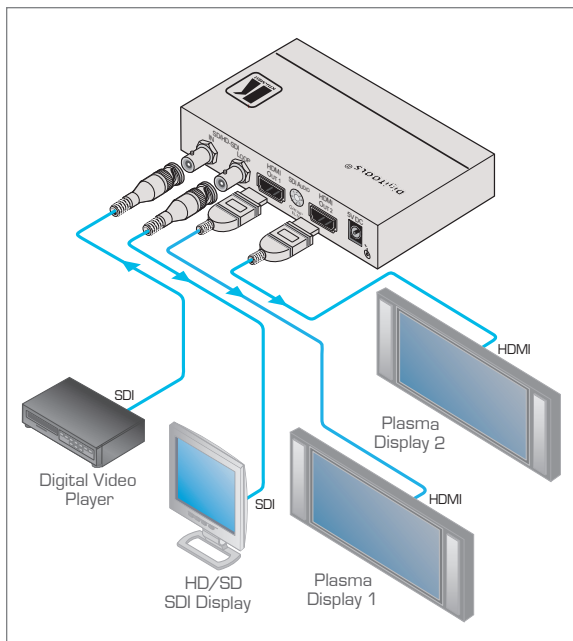

### TECHNICAL SPECIFICATIONS

INPUT:	1 SDI, HD-SDI, 3G HD-SDI on a BNC connector.
OUTPUTS:	1 SDI, HD-SDI, 3G HD-SDI loop on a BNC connector; 2 HDMI connectors.
MAX. DATA RATE:	Up to 3Gbps.
STANDARD COMPLIANCE:	HDMI.
INDICATOR LEADS:	SD/HD, OUT, ON.
POWER SOURCE:	5V DC, 510mA.
DIMENSIONS:	12cm x 7.2cm x 2.4cm (4.7" x 2.8" x 1.0") W, D, H.
WEIGHT:	0.3kg (0.7lbs).
ACCESSORIES:	Power supply.
OPTIONS:	RK-3T 19" rack adapter.

