








The VS-55A is high-performance switcher for unbalanced stereo audio signals. It switches any one of five signals to a single output.

FEATURES

- S/N Ratio >78dB.
- Control Front panel & contact closure (via link connector).
- Desktop Size Compact size. 2 units can be rack mounted side-by-side in a 1U rack space with the optional RK-1 adapter.

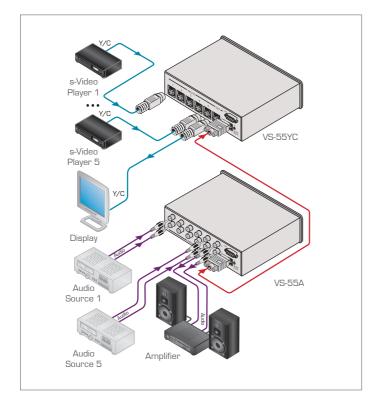

TECHNICAL SPECIFICATIONS

5 unbalanced stereo audio, INPUTS: $1\mbox{Vpp/50k}\Omega$ on RCA connectors.

OUTPUT: 1 audio stereo,

 $1\text{Vpp/}100\Omega$ on RCA connectors.

MAX AUDIO OUTPUT: 3Vpp. AUDIO BANDWIDTH (-3dB): 100kHz.

GAIN RANGE: 60dB (via underside accessible

trimmers).

AUDIO S/N RATIO: Better than 78dB.

CONTROL: 5 front panel buttons, contact closure via the link connector.

THD: Less than 0.08%. POWER SOURCE: 12V DC, 100mA. DIMENSIONS: 16.5cm x 12cm x 4.5cm (6.5" x 4.7" x 1.8") W, D, H. WEIGHT: 0.62kg (1.4lbs) approx. ACCESSORIES: Power supply.

OPTIONS: RK-1 19" rack adapter.

