


Houses of worship

Ticket window

Reception desk

- PA Microphone with rugged, all-metal body
- Frequency response optimized for intelligibility
- Long useful life even in tough day-to-day usage
- Frequency response tailored to speech use




DGN 99

DGN 99 E

Rugged, affordable dynamic cardioid gooseneck microphone for **general public address** and **communications use**. The **DGN 99** provides a frequency response tailored to speech use **for optimum intelligibility** as well as good offaxis rejection for high gain before feedback and suppression of unwanted ambient noise. The **all-metal body** ensures a **long useful life** for the microphone even in tough day-to-day use.

Item numbers:
DGN 99 6000H51010
DGN 99 E 6000H51020

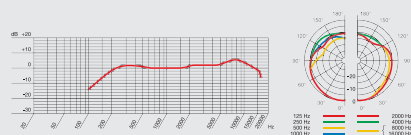


Paging systems

Ticket window

Reception desk

Restaurant

- PA Microphone with rugged, all-metal body
- Frequency response optimized for intelligibility
- Long useful life even in tough day-to-day usage
- Frequency response tailored to speech use

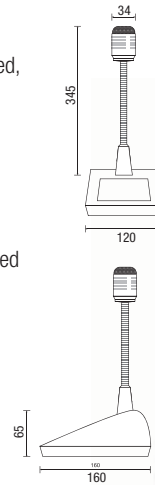


DST 99 S

Rugged, affordable dynamic cardioid gooseneck microphone for general public address and **communications use**. The **DST 99 S** provides a frequency response tailored to speech use **for optimum intelligibility** as well as good offaxis rejection for high gain before feedback and suppression of unwanted ambient noise. The **all-metal body** ensures a **long useful life** for the microphone even in tough day-to-day use.

The **DST 99 S** is mounted on a table stand with an **on/off switch** and coiled cable with 3-pin XLR connector.

Item number:
DST 99 S 6000H51030

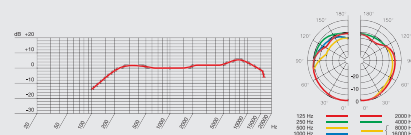

• Polar pattern:	cardioid
• Frequency range:	150 to 15,000 Hz
• Sensitivity:	2.2 mV/Pa (-54 dBV)
• Max. SPL for 1% THD:	133 dB
• Equivalent noise level (IEC 60268-4):	21 dB-A
• Signal/noise ratio (A-weighted):	73 dB
• Impedance:	<530 ohms
• Recommended load impedance:	≥2,000 ohms
• Connector:	unterminated cable ends DGN 99 E: 3-pin male XLR
• Cable:	DGN 99: 2 m (6 ft., 4 in.)
• Finish:	matte black
• Dimensions:	microphone: 34 dia. x 345 mm (1.3 dia. x 13.5 in.) gooseneck: dia. 13 x 300 mm (0.51 x 11.8 in.)
• Net/shipping weight:	DGN 99: 275/422 g (9.6/14.8 oz.) DGN 99 E: 285/334 g (10.0/11.7 oz.)
• Optional accessories:	DGN 99 E: PS 3 F-Lock

• Polar pattern:	cardioid
• Frequency range:	150 to 15,000 Hz
• Sensitivity:	2.2 mV/Pa (-54 dBV)
• Max. SPL for 1% THD:	133 dB
• Equivalent noise level (IEC 60268-4):	21 dB-A
• Signal/noise ratio (A-weighted):	73 dB
• Impedance:	<530 ohms
• Recommended load impedance:	≥2,000 ohms
• Connector:	3-pin male XLR
• Cable:	approx. 50 to 100 cm (20 to 40 in.), coiled
• Finish:	matte black
• Dimensions:	microphone: 34 dia. x 345 mm (1.3 dia. x 13.5 in.) gooseneck: dia. 13 x 300 mm (0.51 x 11.8 in.); table stand (l x w x h): 160 x 120 x 65 mm (6.3 x 4.7 x 2.5 in.)
• Net/shipping weight:	805/1,125 g (1.8/2.5 lbs.)