



REFUSE & RECYCLING BODY COMPANY

## ROUTE KING SERIES

# COCOLLECTOR<sup>®</sup> Front Loader

*Available with IQAN computerized leveling system option for fully automatic loading!*



*Two or Three  
Compartments*



### **KANN Manufacturing Corporation**

210 Regent Street  
PO Box 400  
Guttenberg IA 52052 0400

**Tel** (563) 252 2035

**Fax** (563) 252 3069

**E-mail** [sales@kannmfg.com](mailto:sales@kannmfg.com)

**Web** [www.kannmfg.com](http://www.kannmfg.com)



*Patented Horizontal Drop Floor With  
Variable Volume Adjustable  
Bulkhead Feature*

04/2006

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



REFUSE & RECYCLING BODY COMPANY

**ROUTE KING SERIES**

# COCOLLECTOR<sup>®</sup> Front Loader



**FEATURES**

**GENERAL**

- 3 yd<sup>3</sup> carry can capacity
- 4000 LB lift arm capacity
- 10 yd<sup>3</sup> hopper capacity
- 48 GPM at 1200 RPM hydraulic pump
- 73 GAL hydraulic reservoir with 100 MESH suction strainer and 10 MICRON return line filter
- 2000 PSI operating pressure
- O-ring or JIC hydraulic fittings
- 70 GPM hydraulic valve
- 6 IN bore x 66 IN stroke, single stage, double acting bottom compactor blade cylinder; 58,000 LB compaction force
- 2 single stage, double acting top compactor blade cylinders; 33,700 LB combined compaction force
- 3 IN x 36 IN tailgate cylinders
- 52° dump angle; 135° tailgate rotation
- Hydraulic tailgate operation
- 3 yd<sup>3</sup> bubble tailgate capacity
- 6 IN tapered body from front to back for easy discharge; sealed to hold liquids up to 24 IN deep
- Single or continuous compactor cycle penetrates receiving container 12 IN eliminating feedback and provides ejection force
- 15 AMP automatic reset circuit breakers
- Loom protected wiring
- Self leveling carry can

**CHASSIS**

- 20,000 LB front axle
- 44,000 LB rear axle
- 2,580,000 minimum RPM per rail IN/LB

	Single Axle	Tandem Axle	Tandem Axle w/ Tag
<b>CC 23</b> yd <sup>3</sup>	155-158 IN WB (requires tag axle)	173-180 IN WB	NA
<b>CC 31</b> yd <sup>3</sup>	NA	197-210 IN WB	197 IN
<b>CC 35</b> yd <sup>3</sup>	NA	V2 197 IN WB V3 210 IN WB	197 IN

**OPTIONS**

**FUNCTION**

- 45 SEC compactor cycle
- 8 SEC cart tipper cycle
- 14 SEC lift arm cycle

**TIPPER**

- Cart tippers

**LEVELING**

- IQAN computerized leveling system

**LIGHTS**

- LED lights
- Safety work lights
- Strobe light

**PAINT**


- Standard PPG other than white
- Metallic
- Multi-color
- Striping

**SAFETY**


- 10 or 20 LB fire extinguisher
- Tool box
- On-board scales
- Fork lockout
- Flat tailgate
- Camera (single, dual)
- Service jack package



*Separate independent compartments to eliminate cross contamination issues between commodities.*

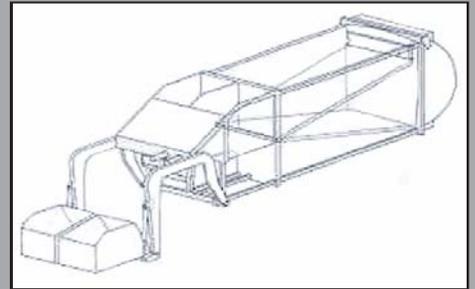

*The 2 and 3 compartments split horizontally. Top compartment(s) adjust to fit your route needs.*

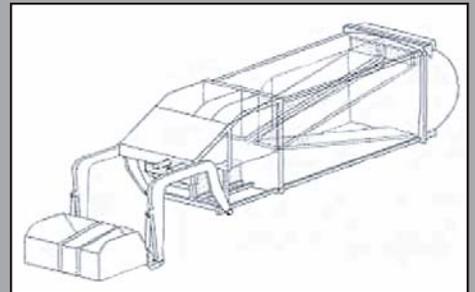

*The compartment volumes can be manually adjusted to 50/50, 60/40, or 70/30.*