

Atlona 16 Input by 2 Output HDMI Switcher

Model: AT-HD-V16x2



Two mirrored HDMI outputs supporting 1920x1200, 1080p and 3D visual settings. Also supports multi-channel digital audio pass through up to Dolby TrueHD and DTS-HD Master Audio. Atlona 16 Input by 2 Output HDMI Switcher supports a wide range of devices to suit most professional needs.



Re-Clocking Technology


With built in HDMI equalization inputs and outputs can span 50 feet without extenders, allowing an extra 20 feet per port.

Picture Perfect Quality

Supporting 480i through 1080p, 640x480 through 1920x1200, and 3D, get the best visual quality passed through to your displays

Dual HDMI Outputs

Send media to two different displays or a display and AVR simultaneously with dual mirrored outputs. Great for using a projector and a TV to display high quality presentations.

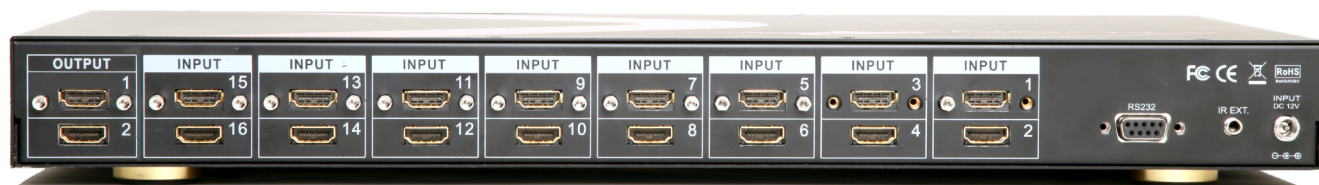

ATLONA 16 Input by 2 Output HDMI Switcher

Model: AT-HD-V16x2



FEATURES

- Supports extremely high resolutions up to 1920x1200 or 1080p
- Dual HDMI output (non-matrix/mirrored). Connect to two displays at the same time or a display and AVR
- Supports latest digital audio formats up to Dolby TrueHD and DTS-HD Master Audio
- Full 3D support, supports all 7 available formats
- HDCP and EDID compliant
- 3 Control interfaces: Front panel, IR remote control, and RS-232
- Re-Clocking technology for both inputs and outputs
- CEC pass through
- Plug and Play
- Supports 24/30/36/48 bit color depth displays
- Rack Mountable (1U)
- Compatible with DVI, use a DVI to HDMI adapter to allow this.

SPECIFICATIONS

Input ports	16 x HDMI (Type A Female)
Output ports	2 x HDMI (Type A Female)
Frequency bandwidth	6.75 Gbps
Resolutions	Up to 1080p or 1920x1200
Color Depth	up to 48bit
Power supply	12v/2A (universal 110/220v)
Dimensions	17.4x8.03x1.77 (inch) / 442x204x45 (mm) - 1U
Weight	6lbs
Temperature	Operation: 23°F thru 122°F or -5°C thru 50°C Storage: -4°F thru 140°F or -20°C thru 60°C

PACKAGE CONTENTS

- 1 x AT-HD-V16x2
- 1 x Set of Rack Ears
- 1 x 12v Power Supply
- 1 x RS-232 Cable
- 1 x IR Extender
- 1 x User Manual