



ATLONA 1x12 HDMI DISTRIBUTION AMPLIFIER (HDMI 1.3)

Weight	3.50 lbs
SKU#	AT-HD-V112



Features:

- HDMI 1.3, HDCP1.1 and DVI1.0 compliant.
- Deep color video up to 12bit, 1080p@(24/60)Hz 1920x1200.
- HDCP keyset allows each output to work independently when connecting to a HDMI display.
- Splits a HDMI source up to eight outputs simultaneously, without signal loss.
- Supports DVI source and DVI display by using HDMI to/from DVI adapter cable.
- Dolby Digital, DTS digital audio transmission (32-192 kHz Fs sample rate).
- Supports High Definition audio-Dolby Digital TrueHD and DTS-HD
- Supports a wide range of PC and HDTV resolutions from VGA to WUXGA and 480i to 1080p.
- HDMI cable distance test with 1080p resolution, the Input/Output source can run up to 15m (50ft) without degradation
- Supports EDID functionality. The unit will detect the first HDMI/DVI output source's EDID and record it in the unit.

Technical Specifications:

- Frequency bandwidth: 225 MHz
- Max. Resolution HDTV: 1080p
- Max. Resolution PC: 1920x1200
- Power Supply: 5VDC (US/EU standards, CE/FCC/UL certified)
- Dimensions: (mm) 322mmW x 31mmH x 160mmD
- Weight(g) 1.5 Kgs
- Chassis Material Metal
- Operating Temperature Operating from -5 to +35 C(-41 to +95 C)

Rear View



Inputs/Outputs:

- Input port: 1x HDMI female port (Type A connector)
- Output ports: 12 x HDMI female ports

Package Includes:

- 1x12 HDMI Distribution Amplifier (AT-HD-V112)
- 5V Universal Power Supply
- User's Manual

Warranty:

3 year manufacturer warranty (parts and labor)



Atlona
Tel: 408-954-8782
Fax: 408-954-8792
toll free: 1-877-536-3976


WWW.ATLONA.COM



SIMPLE, EASY

ATLONA®

Connection Diagram

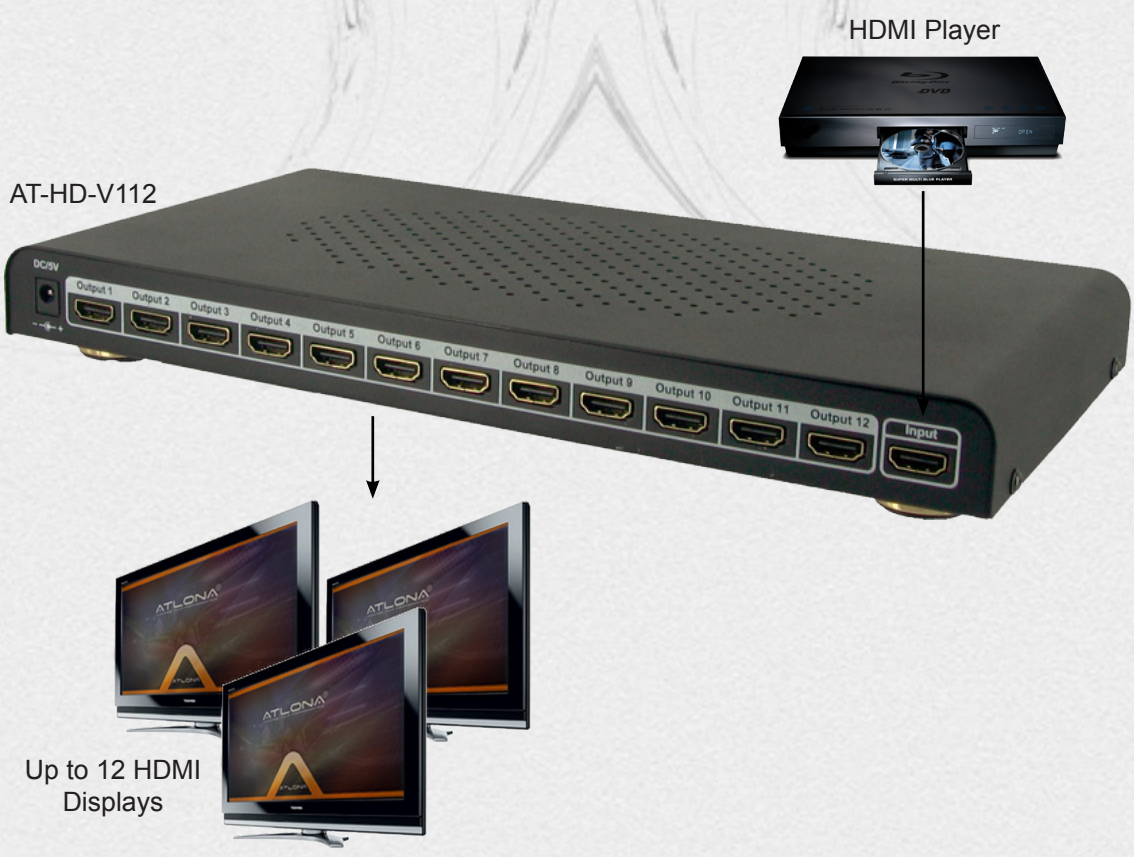

Atlona
 Tel: 408-954-8782
 Fax: 408-954-8792
 toll free: 1-877-536-3976

WWW.ATLONA.COM

COMPATIBLE WITH: Control UNIVERSAL® remote control

HDMI™ HIGH DEFINITION MULTIMEDIA INTERFACE ADOPTER Member

CEA®

infoComm Member INTERNATIONAL

CEDIA® CUSTOM ELECTRONIC DESIGN & INSTALLATION ASSOCIATION