



## Rolling Pit Jack Capacity 31,000 lbs.



### Model RPJ-3.31

**Durability:** both the piston rod and the pump piston are hard-chrome plated, for the best protection against corrosion and wear.


**Fully hydraulic lifting unit:** during every lifting and lowering movement the cylinder is submerged in oil protecting the complete cylinder against corrosion.

**Foot pedal operation:** the floor-running pit jacks are operated by foot pedals, requiring minimum effort. This leaves the hands free for working on the vehicle.

**Safety:** the carriage of the Rolling Pit Jack is automatically lowered when handling loads of 0.9 t or more. The integral locking brakes guarantee maximum stability.

**Time-saving (I):** the hydro-pneumatic quick lift rapidly moves the piston rod to the lifting point.

**Time-saving (II):** the hydro-pneumatic forced return rapidly retracts the piston even when off-load. Effectively the piston is "pulled" back into its rest position.

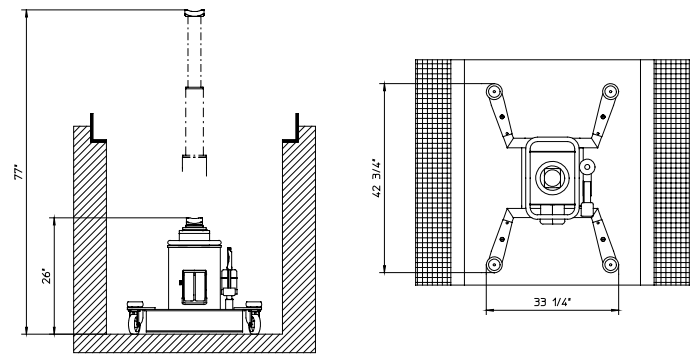

[www.stertil-koni.com](http://www.stertil-koni.com)

Stertil-Koni U.S.A. Inc., 200 Log Canoe Circle, Stevensville, Maryland 21666  
Tel. 410-643-9001 Toll free 800-336-6637 Fax 410-643-8901 [www.stertil-koni.com](http://www.stertil-koni.com) E-mail: [lifts@stertil-koni.com](mailto:lifts@stertil-koni.com)



A member of the Stertil Group