HYDRONIC HEATING PRODUCTS

Hydronic Heating Specialties

MODEL PBSS

BRONZE PURGE, BALANCE & SHUT-OFF VALVE

Straight-through flow; all brass cover and chain prevent accidental system drainage; hose thread connection for disposal of drained media.

FEATURES


- RPTFE seals
- Adjustable packing
- Zinc plated steel tee handle w/ vinyl grips
- 600 Psig CWP in open position
- Solder x Solder x Hose Connections

Model Number	Part Number	Size (in.)	Wt./100 (lbs.)
PBSS34	78-668-01	3/4	206
PBSS1	78-668-02	1	359
	78-671-01*	3/4	198

^{*} Available with screwdriver slotted stainless steel stem.

EXT (16-XT) SERIES





1 NPT

20.00



- Welded steel construction
- Rugged flexible diaphragm

14.0

16-XT7-03

- Maximum working pressure: 150 psig
- Ideal for peak use systems such as car washes, processing plants, hotels/motels, commercial laundries.

15.75

Net Wt.


(lbs.)

6.3

11.5

13.7

24.0

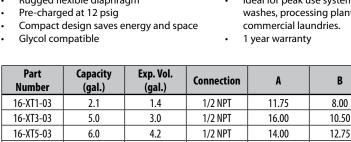

8.5



