


RELATED HYDRONIC & STEAM HEATING PRODUCTS

Pipeline Strainers

MODEL YBS



BRONZE SWEAT END "Y" STRAINERS

FEATURES

- Working pressure (non-shock)
400 CWP - Cold Working Pressure
- Sizes: 1/2" to 2"
- Optional tapped caps available (suffix -02)

Standard Screen Size (in.)	Screen Opening
1/2	50 Mesh
3/4 to 2	20 Mesh

Part No. Suffix	Option
-01	Solid cap (standard)
-02	Tapped Cap
-P2	Tapped cap with pipe plug

Model Number	Part Number	Size (in.)	Dimensions (in.)		Tapped Cap (Suffix-02)	Wt./100	Screen Area (in. ²)
			A	B			
YBS12	59-303-01	1/2	2.75	1.81	1/4 NPT	50	3.19
YBKS12	59-303-P2	1/2			1/4 NPT	50	
YBS34	59-304-01	3/4	4.00	2.87	1/2 NPT	121	8.18
YB20KS34	59-304-P2	3/4			1/2 NPT	121	
YBS1	59-305-01	1	4.75	3.56	3/4 NPT	189	12.90
YB20KS1	59-305-P2	1			3/4 NPT	189	
YBS114	59-306-01	1-1/4	5.25	3.94	3/4 NPT	280	16.20
YB20KS114	59-306-P2	1-1/4			3/4 NPT	280	
YBS112	59-307-01	1-1/2	6.00	4.62	1 NPT	426	22.80
YBKS112	59-307-P2	1-1/2			1 NPT	426	
YBS2	59-308-01	2	7.25	5.00	1-1/4 NPT	627	32.70
YBKS2	59-308-P2	2			1-1/4 NPT	627	

MODEL YCT Apollo® International




CAST IRON THREADED Y-STRAINER

Install these hardworking strainers upstream in almost any application to protect valves, regulators, solenoids and meters from rust, dirt and pipe scale.

FEATURES

- 20 mesh screens standard to 2"; .045 perf 2-1/2" to 3", others available
- Screen cap is tapped to install flush valve or plug
- Sizes: 1/4" to 3"
- Working Pressure (non-shock)
250 psig @ 406°F. Steam
400 psig @ 150°F. Water, Oil, Gas

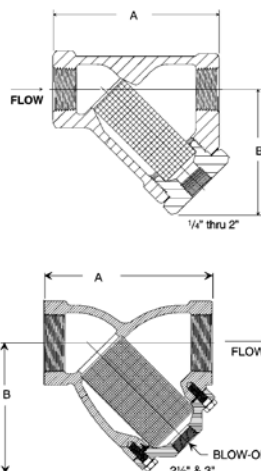

Part Number	Size (in.)	Dimensions (in.)		Blow-off NPT	Wt. (lbs.)	Screen Area (in. ²)
		A	B			
YCT01M20	1/4	3.19	2.37	1/4	1.25	2.8
YCT02M20	3/8	3.19	2.37	1/4	1.25	2.8
YCT03M20	1/2	3.19	2.37	1/4	1.50	2.8
YCT04M20	3/4	3.75	3.37	3/8	2.25	4.7
YCT05M20	1	4.00	3.50	1/2	3.00	7.0
YCT06M20	1-1/4	5.00	4.12	3/4	5.25	12.1
YCT07M20	1-1/2	5.75	4.69	3/4	6.50	16.4
YCT08M20	2	7.00	5.44	1	11.13	23.1
YCT09P045	2-1/2	9.25	5.68	1	23.50	55.0
YCT00P045	3	10.00	7.00	1	33.00	78.4