


# PERMA-SEAL-3-PORT VALVE

Size:	1 1/2" - 2 1/2"
Material:	U-PVC body , Glass filled Noryl rotor, ABS handle, NSF 61
O-RINGS:	EPDM
Rotor Seal:	Permanently lubricated elastic polymer (proprietary compound, Teflon, Silicone)
Pressure Rating:	50 psi
Positive seal back pressure:	15 psi
Vacuum Rating:	29" Mercury

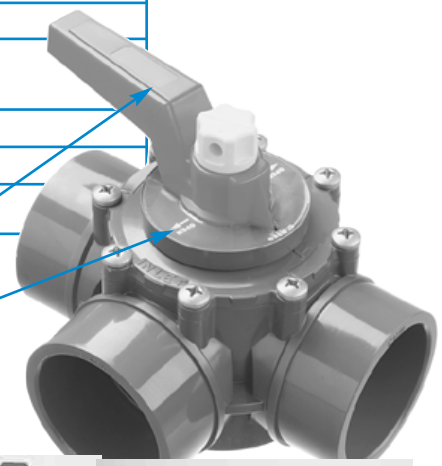

PRIVATE LOGO AVAILABLE (size: 7/16" 1 3/4")

FIRST GLANCE TWO COLOUR FLOW INDICATOR LAMINATED MARKINGS  
"OPEN-CLOSED-FLOW DIRECTIONS"

## FEATURES:

- Proportional mixing availability.
- Double O-ring shaft seal.
- Permanently lubricated rotor seal with extreme wear resistance, exceeds 3000 dry cycle requirement.
- Chlorine, acid and ozone resistant construction.
- Handle-locking knob provides eye-let for lock attachment.
- Engineered "PLAST-TITE" screws ( 18.8 stainless ) will not crack plastic when servicing valve.
- Universal shaft spline pattern adapts to most actuators.
- All wetted materials are of NSF-50 or 61 designation.



90° MODEL - 2 PORT 0V2-2090

2 PORT MODEL 0V2-2010

PART #	DESCRIPTION	LIST PRICE	QTY. PER CARTON
0V3 - 2000	2" - 2 1/2" 3 PORT VALVE (UPVC) C/W 3 X 1 1/2" BUSHINGS	\$64.00	12
0V3 - 2010	2" - 2 1/2" 3 PORT VALVE (UPVC) SOCKET	\$58.00	12
0V3 - 1500	1 1/2" - 2" 3 PORT VALVE (UPVC) SOCKET	\$58.00	12
0V3 - 1503	1 1/2" 3 PORT VALVE - 1 1/2" FIP THREADED NPT	\$58.00	12
0V3 - 5070	1 1/2" - 50MM 3 PORT VALVE (UPVC) SOCKET METRIC	\$58.00	12
0V3 - 6370	2" - 63MM 3 PORT VALVE (UPVC) SOCKET METRIC	\$58.00	12
0V2 - 2090	2"-2 1/2" 2 PORT VALVE 90° SOCKET	\$52.00	12
0V2 - 1590	1 1/2"-2" 2 PORT VALVE 90° SOCKET	\$52.00	12
0V2 - 2000	2"-2 1/2" 2 PORT VALVE SKT, C/W BUSHINGS	\$52.00	12
0V2 - 2010	2"-2 1/2" 2 PORT VALVE, SOCKET	\$68.00	12
0V2 - 1500	1 1/2"-2" 2 PORT VALVE, SOCKET	\$52.00	12

\* This model will be supplied with three 2" x 1 1/2" reducer bushings and one plug, which fits all multiple plumbing configuration providing superb cost savings.

NOTE: Also available with Praher " Light Duty" electrical actuator ( 24 Volt/120 Volt. See page 9.)