

# Model DL-3 High Capacity Loader




The DL-3 does more volume! Introducing the model DL-3, nicknamed "the Twister". Engineered for high volume collection operations after hurricanes, icestorms, or tornadoes. Operated by dual mechanical joystick controls located at the stationary top-mount seat. The DL-3 is great for disaster cleanup, but is also versatile enough that you can use it for your regular bulky trash and brush collection routes.

- Faster than chipping and less invasive than a wheel loader
- Single operator turn-key system
- Great tool for hauling land clearing or site prep debris
- Duty cycle rated and proven
- Stationary top-mount mechanical joystick controls
- 40-45 cubic yard trash dump body
- ANSI Z245 Compliant



- [Standard Features](#)
- [Specifications](#)
- [Options](#)

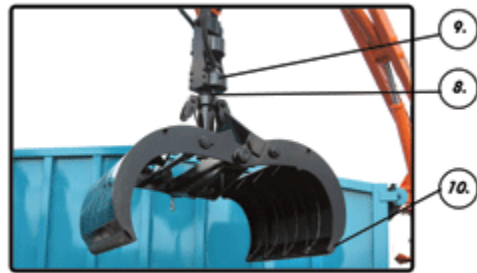

4. **CONTROL OPTIONS:** Greaseless dual walk-thru controls operational from either side of truck. Petersen also offers QUADSTICK® controls and stationary top mount controls with joysticks or valvehandles.
7. **OUTRIGGER STYLE:** Out and down outriggers improve safety in traffic and reduce damage to streets.
3. **NO EXPOSED GEARS:** Boom swing does not have any exposed pinion or bull gears. Petersen's rotary actuator boom swing method is lower maintenance.
7. **TELESCOPIC TIP EXTENSION:** Four foot tip extension adds flexibility and maneuverability. Tip extension hoses are enclosed and protected.
9. **SINGLE POINT OF RESPONSIBILITY:** Petersen Industries manufactures and installs both the grapple loader, including bucket and controls, and the trash dump body.
11. **HEIGHT:** The standard dual walk-thru has an overall height of 11'3".
13. **SAFETY LOCKING VALVES:** Boom cylinders have counterbalance valves, and outrigger down cylinders have pilot operated check valves to prevent leakdown or collapse in the case of hose rupture.
15. **BUCKET ROTATION:** Continuous rotation for convenience.
17. **NO HOSES BELOW BUCKET ROTATOR:** Reduced downtime due to elimination of hoses in bucket jaw area.
19. **ANTI-SCALPING:** Reverse curve motion of bucket helps prevent scalping of lawns.
21. **WARRANTY:** Three year structural, one year hydraulic.