




## HAWK EYE

DIGITAL INTERCONNECT: 75Ω COAX

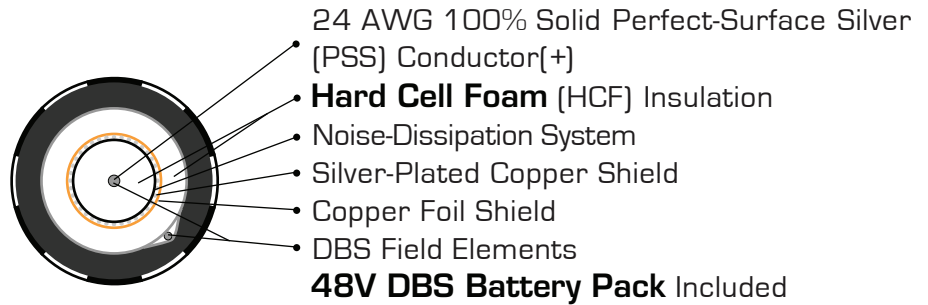

**SOLID PERFECT-SURFACE SILVER:** Extreme-purity PSS allows optimum signal transfer.

**DIELECTRIC-BIAS SYSTEM (DBS, US Pat #7,126,055):** All insulation slows down the signal on the conductor inside. When insulation is un-biased, it slows down parts of the signal differently, a big problem for very time sensitive multi-octave audio. AudioQuest's DBS creates a strong stable electrostatic field which saturates and polarizes (organizes) the molecules of the insulation. This minimizes both energy storage in the insulation and the multiple nonlinear time-delays. Sound appears from a surprisingly black background with unexpected detail and dynamic contrast. The DBS pack's batteries will last for years. A test button and LED allow for the occasional battery check.

**NOISE-DISSIPATION SYSTEM:** 100% shield coverage is easy. Preventing captured RF Interference from modulating the equipment's ground-reference requires AQ's Noise-Dissipation System. Metal and Carbon-Loaded synthetics prevent most RFI from reaching the equipment's ground-plane.

**HARD-CELL FOAM:** Rigid micro-cellular high-density PE foam insures stable impedance and minimum reflection-induced jitter. Once DBS is attached (for 2 weeks), the normal limitations of un-biased Hard-Cell Foam are eliminated.

**COLD -WELD SYSTEM:** Novel plug design enables a perfect heat-free connection between cable and plug. XLR plugs are also available.

**DIRECTIONS:** When using Hawk Eye for digital audio, please be sure to observe the directional arrows. Video is not sensitive to directionality.