




SPECIALTIES, STAINLESS AND CARBON STEEL

FIG. 9345 DRAIN FOR FLOATING (ISOLATED) FLOOR SYSTEMS



FUNCTION: Used in areas which may have to be isolated from the other parts of the building; such as mechanical equipment rooms, studios, music rooms, laboratories and data processing areas.

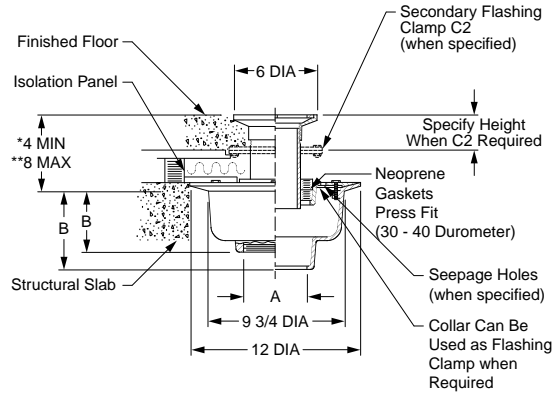

OUTLET VARIATIONS (Specify type of outlet and pipe size in inches.)

Outlet Type	Outlet Designation Outlet Type/Pipe Size	"B" Body HT. DIM.	ADD
Inside Caulk	C02, C03, C04	6"	N/C
Speedi-Set Outlet SW	L02, L03, L04	6"	N/C
Speedi-Set Outlet XH	LXH02, LXH03, LXH04	6"	N/C
Threaded	T02, T03, T04	4 3/4"	47.00
No-Hub	Y02, Y03, Y04	6"	N/C

OPTIONS:

Option	Description	ADD
-C	Underdeck Clamp	146.00
-G	Galvanized CI	730.00
-R	Sump Receiver Plate	164.00
-W	With Seepage Holes	90.00

A OUTLET SIZE	FREE TOP AREA SQ IN	DUCO CI PB TOP	DUCO CI NB TOP	APPROX. WT. LBS.	
02, 03, 04"	8 1/2"	7	839.00	891.00	90


REGULARLY FURNISHED: Duco Cast Iron Lower Body and Flashing Collar, Duco Cast Iron Top Drain Body with Polished Bronze Top and Neoprene Isolation Gasket.

**If greater dimension than shown from lower flange to top is required specify a longer nipple.

SPECIALTIES

FIG. 9350 SERIES CLEANOUT FOR FLOATING (ISOLATED) FLOOR SYSTEMS

FUNCTION: Used in areas which may have to be isolated from the other parts of the building; such as mechanical equipment rooms, studios, music rooms, laboratories and data processing areas.

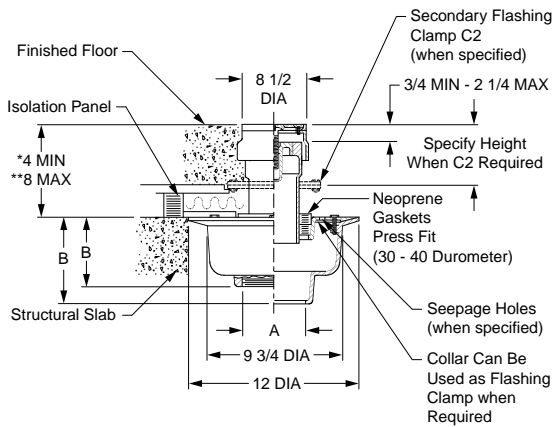

OUTLET VARIATIONS (Specify type of outlet and pipe size in inches.)

Outlet Type	Outlet Designation Outlet Type/Pipe Size	"B" Body HT. DIM.	ADD
Inside Caulk	C02, C03, C04	6"	N/C
Speedi-Set Outlet SW	L02, L03, L04	6"	N/C
Speedi-Set Outlet XH	LXH02, LXH03, LXH04	6"	N/C
Threaded	T02, T03, T04	4 3/4"	47.00
No-Hub	Y02, Y03, Y04	6"	N/C

OPTIONS:

Option	Description	ADD
-C2	Secondary Flashing Clamp	112.00
-G	Galvanized CI	688.00
-QC	Round Top Recessed f/Terrazzo (Fig 9354)	213.00
-S	With Square Top (Fig 9351)	N/C
-S-QC	Square Top Recessed f/Terrazzo (Fig 9355)	213.00
-S-TC	Square Top Recessed f/Tile (Fig 9353)	N/C
-TC	Round Top Recessed f/Tile (Fig 9352)	N/C
-W	With Seepage Holes	90.00

A OUTLET SIZE	DUCO CI PB TOP	DUCO CI NB TOP	APPROX. WT. LBS.
02, 03, 04"	977.00	1,013.00	90

REGULARLY FURNISHED: Duco Cast Iron Lower Body and Flashing Collar, Duco Cast Iron Adjustable Ferrule and Frame with Polished Bronze Top, Bronze Cleanout Plug in Ferrule and Neoprene Isolation Gasket.

**If greater dimension than shown from lower flange to top is required specify a longer nipple.

