




# ROOF DRAINS

## FIG. 1580 SCUPPER DRAIN - CONVEX GRATE



**FUNCTION:** Used at specific angles of junction of roof and parapet with connection to outside conductor. Convex grate allows ample drainage area if sides become clogged with debris. Clamping arrangement insures watertight assembly.

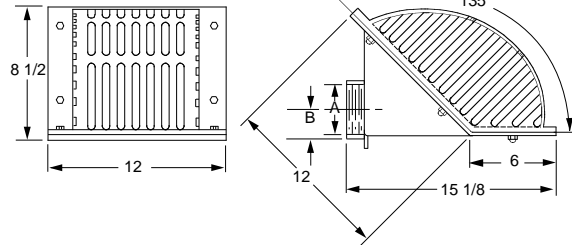

**OUTLET VARIATIONS** (Specify type of outlet and pipe size in inches.)

Outlet Type	Outlet Designation Outlet Type/Pipe Size	ADD
Threaded.....	T02, T03, T04.....	N/C
	T05, T06.....	N/C


**ROOF DRAINS**

A OUTLET SIZE	B	FLANGE SIZE	FREE AREA SQ IN	†GALV. STL RB TOP	GALV w/ PB TOP	GALV w/ NB TOP	APPROX. WEIGHT LBS
02"	1 3/4"	12" Wd	111	2,285.00	2,612.00	2,750.00	52
03"	2 1/4"	12" Wd	111	2,285.00	2,612.00	2,750.00	52
04"	2 3/4"	12" Wd	111	2,285.00	2,612.00	2,750.00	52
05"	3 1/4"	12" Wd	111	2,285.00	2,612.00	2,750.00	52
06"	4"	12" Wd	111	2,285.00	2,612.00	2,750.00	52

**REGULARLY FURNISHED:** Cold Galvanized Steel Body with Rough Bronze Grate and Flashing Clamp.

## FIG. 1605 6" DIAMETER LOW PROFILE SIPHONIC GUTTER DRAIN

**FUNCTION:** For use in engineered siphonic roof drainage systems for gutters, parapets, small balconies, sills, cornices, marquees and other small overhanging areas where drainage of rainwater is required. Air baffle creates siphonic drainage action producing more efficient drainage than traditional gutter drains.

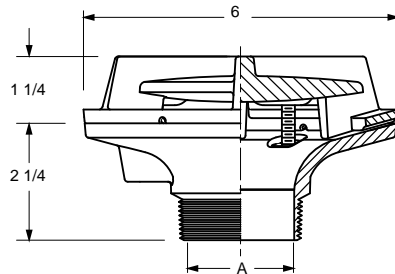

**OUTLET VARIATIONS** (Specify type of outlet and pipe size in inches.)

Outlet Type	Outlet Designation Outlet Type/Pipe Size	ADD
Male Threaded .....	T02 .....	POA
No-Hub .....	Y02 .....	POA

**OPTIONS:**

-G Galvanized CI .....	POA
-U Vandal Proof .....	POA

A OUTLET SIZE	FLANGE DIA.	FREE AREA SQ IN	†DUCCO CI	APPROX. WEIGHT LBS
02"	6"	5.42	POA	16

**REGULARLY FURNISHED:** Ducco Cast Iron Body with Combination Flashing Clamp and Air Baffle.

