



Commercial Roof Hydrant

NON-FREEZE ROOF HYDRANT



FIG. # 5906, 5907



Non-Freeze Roof Hydrant

FUNCTION:

Provides water availability for window washing, cleaning of condenser coils, cooling towers and other types of roof equipment. Valve body of hydrant is drilled and tapped with 1/8" (3) drain hole which must be piped to a drain location.

PRODUCT FEATURES:

- 3/4" (19) Hose Connection
- Adjustable Flow Wheel Lock Handle
- Non-Freeze Hydrant with Integral Vacuum Breaker
- Galvanized Pipe Casing
- Deck Flange and Underdeck Clamp
- Hydrant is provided with a Bucket Handle Hook above the nozzle for ease of bucket filling
- Specify Fig. # 5907 for ASSE 1052 Dual Check Valve

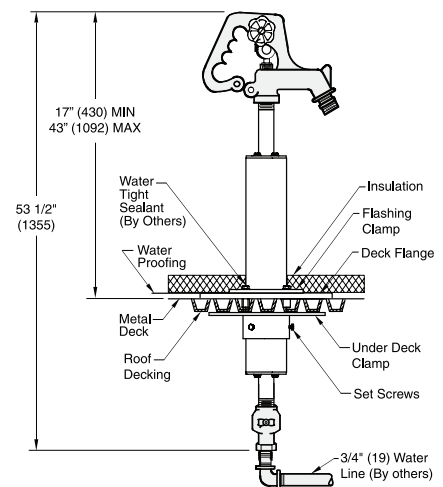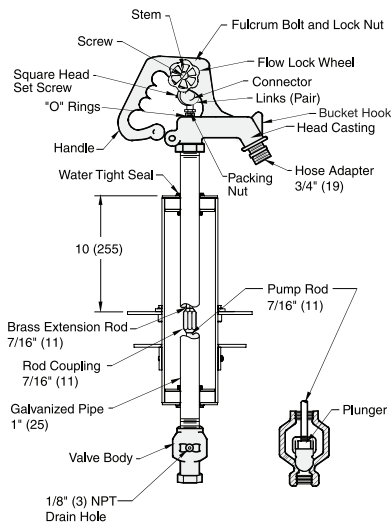

NOTE: Dimensions shown in parentheses are in millimeters.

