



CLEANOUTS

FIG. 4760, 4765 SERIES WALL AND CEILING ACCESS DOORS SQUARE OR RECTANGULAR FRAMES W/HINGED LOCKED DOOR



FUNCTION: Used to cover cleanout plugs, valves, controls or equipment concealed in walls and ceilings. Larger sizes are used to provide man access to utility and attic spaces. The face-of-the-wall type is for tile, masonry or dry wall construction, and is usually installed in an opening provided in the finished wall. The flush-with-wall type is for plaster or wet wall construction and is installed prior to finish. The anchor holes provide a means of securely anchoring so that the face of the cover will be flush with the finished wall.



OPTIONS:

- AK Allen Key LatchN/C
- CL Cylinder Lock (CL)175.00
- SCL Screwdriver Cam LatchN/C

ADD
(Specify Opening Device)

*Doors 24" and Larger are furnished with a Continuous Piano Hinge

DOOR SIZE	4760 DRY WALL PC STEEL	4762 DRY WALL STAINLESS STEEL	4765 PLASTER WALL PC STEEL	4767 PLASTER WALL STAINLESS STEEL	APPROX. WEIGHT LBS
08 x 08"	501.00	807.00	545.00	780.00	5
12 x 12"	675.00	835.00	717.00	825.00	8
12 x 16"	813.00	1,874.00	867.00	1,288.00	10
16 x 16"	1,007.00	1,948.00	1,042.00	1,343.00	12
18 x 18"	1,042.00	2,202.00	1,122.00	1,619.00	14
24 x 24"	3,309.00	4,076.00	3,419.00	2,515.00	20
24 x 36"	3,466.00	4,181.00	3,746.00	POA	30

REGULARLY FURNISHED: 16 gauge steel door and frame with concealed hinge* and screwdriver operated latch which holds the door securely closed. Nailers slots are provided for attaching to studs. Anchor straps are available when required for installation in masonry construction. When "B" dimension is 24" or over, additional latches are provided at the top and bottom of door. When specified with allen latch or cylinder lock, matching latches/locks are furnished.

4760 SERIES




Fig. 4760

4765 SERIES





Fig. 4765

FEATURES AND TYPICAL INSTALLATIONS

FACE OF WALL TYPE

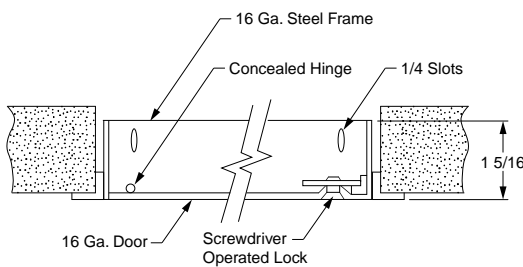

FLUSH WITH WALL TYPE

