

Commercial Post/Yard Hydrants



NON-FREEZE POST HYDRANT WITH 3/4" (19) OR 1" (25) INLET AND HOSE CONNECTION



FIG. # 5909, 5909-MF-1
Post Hydrant



FUNCTION:

Used where an above ground water outlet is required in areas which are subject to freezing temperatures. Freezing is prevented by burying the valve housing below the frost line and draining water from the casing after shut-off. The hydrant is available with a 3/4" (19) or 1" (25) inlet and hose connection.

PRODUCT FEATURES:

- 3/4" (19) or 1" (25) inlet and hose connection
- Adjustable flow wheel lock handle
- Galvanized casing
- Hydrant is provided with a Bucket Handle Hook above the nozzle for ease of bucket filling
- Replacement parts are available in kit HPRK -9.


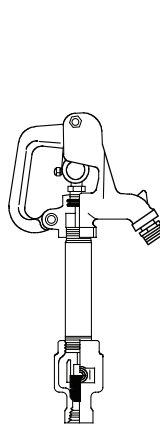


FIG. 5909

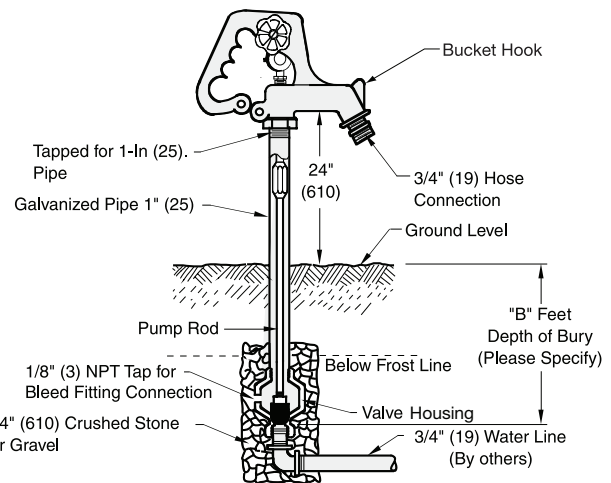

Regularly Furnished:
Non-Freeze Post Hydrant with Galvanized Casing and Adjustable Flow Wheel Lock Handle. Inlet and Hose Connection Size Furnished as Indicated by Figure Number Selected.

- Variations:**
- Vacuum Breaker -H

NOTE: Dimensions shown in parentheses are in millimeters.

- Inlet and Hose Connections:**
- Fig. 5909.....3/4" (19)
 - Fig. 5909-MF-1.....1" (25)