



Commercial Exposed Wall Hydrants

GUARDIAN DUAL CHECK[®] HYDRANT WITH INTEGRAL VACUUM BREAKER, DUAL CHECK VALVE AND EXPOSED HOSE CONNECTION

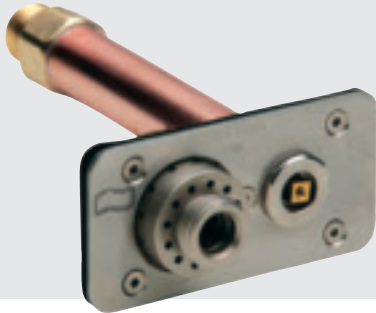


FIG. # 5619

Guardian Dual Check[®] Hydrant

FUNCTION:


The Guardian Dual Check Hydrant is ASSE 1052 certified. It has a quarter-turn feature that allows for a full flow of water with a quarter-turn of the ergonomically designed wheel handle or "T" handle key. The hydrant features an integral vacuum breaker and dual check valve that provide positive non-freeze protection. It can be used anywhere an exposed connection is acceptable. The Guardian is adaptable to all types of wall construction.

SPECIFICATIONS:

- Complies with ANSI A112.21.3M
- Complies with ASSE 1019-B, 1052 and 1053
- IAPMO Listed, File #2749

PRODUCT FEATURES:

- Quarter-turn full-flow feature
- 3/4" (19) inlet and hose connection
- Removable "T" handle key or ergonomically designed wheel handle
- Flush installation to eliminate catch points
- Bronze hydrant with stainless steel face
- Self draining non-freeze hydrant with dual check valve & integral vacuum breaker
- For interior or exterior commercial construction applications
- Replacement parts are available in kit HPRK -19.

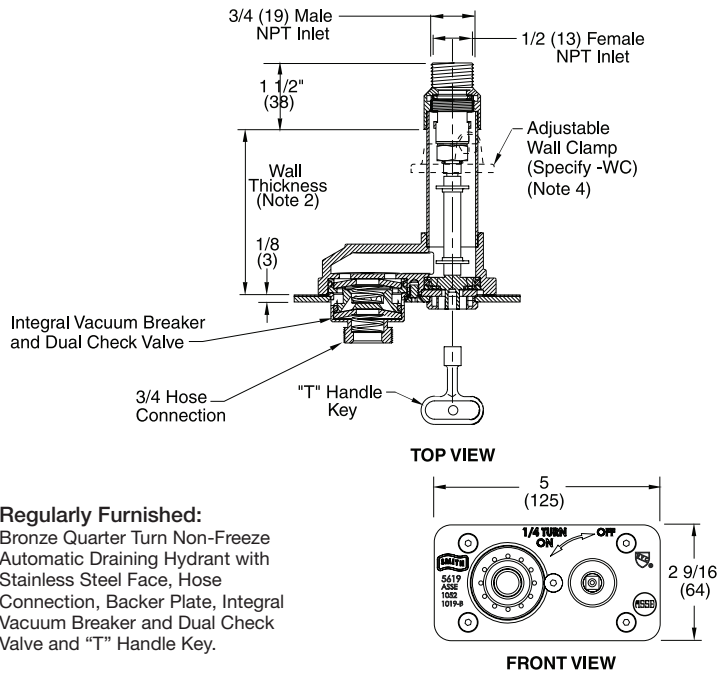

Regularly Furnished:
Bronze Quarter Turn Non-Freeze Automatic Draining Hydrant with Stainless Steel Face, Hose Connection, Backer Plate, Integral Vacuum Breaker and Dual Check Valve and "T" Handle Key.

- Variations:**
- 1 - Adjustable Wall Clamp -WC
 - 1" (25) Hose Connection -HC1
 - 1" (25) Male NPT Inlet Connection -IC1
 - Mild Climate -SAP
 - Wheel Handle -WH

- Optional Materials:**
- Polished Bronze Face -PB
 - Chrome Plated Face -CP

FIG. 5619

NOTE: Dimensions shown in parentheses are in millimeters.

Patent No. US 6,752,167

