


total control



MC-73CB **CCD Box-type IP camera**

Super HAD CCD sensor, D1 (720x480) resolution at 30 fps ■ Viewable on MX-6000 and KP-4000 ■ Useable at 0.3 Lux (color) 0.002 Lux (mono). ■ Simultaneous dual streaming. ■ Optional WiFi dongle available.

MC-73CB Premium Surveillance IP Camera

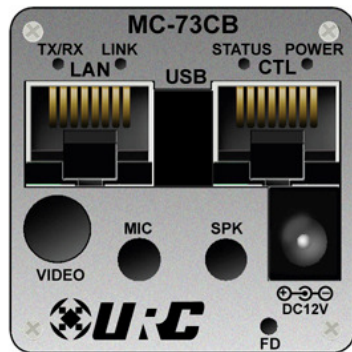

specifications

* Video Encoding	JPEG/H.264 (simultaneous dual stream) H.264/MJPEG H.264/H.264 (true H.264 dual streaming) Simultaneous streaming with independent control
* Resolution	D1 - 720x480 (NTSC) / 720x576 (PAL) 4CIF - 704x480 (NTSC) / 704x576 (PAL) CIF - 352x240 (NTSC) / 352x288 (PAL)
* Audio Encoding	8 bit PCM (G.711-u-low), Sampling rates 8KHz, Mono Audio
* Security	Channel based user password protection for live-cast, alarm output and audio.
* Working Environment	Temperature: 32~122 F (0~50 °C) / Humidity: 20~80% RH
* Lens	CS Mount type Lens Default Lens: DC IRIS varifocal lens 3~8 mm, 1/3", F1.4, CS mount
* Weight	0.7 lbs. (0.305Kg) without Lens & Power Supply