

SmartRack Wall-Mount Rack Enclosures & Open Frame Racks



- ▶ Enclosures from 6U to 26U
- ▶ Locking doors and side panels
- ▶ Adjustable mounting rails
- ▶ Hinged wall bracket for easy access to equipment and cabling (most models)
- ▶ Perforated door, top, bottom and sides for superior ventilation
- ▶ Optional heavy-duty rolling casters
- ▶ Deep Enclosure for standard 1U servers
- ▶ Open Frame Racks from 2U to 22U also available

Secure Equipment in Minimal Space

SmartRack Wall-Mount Rack Enclosures are perfect for housing IT equipment in rooms with limited floor space. Adjustable vertical mounting rails with square holes accommodate all standard 19-inch rack equipment. Sturdy steel frames are rated up to 250 lb. Perforated front door, top, bottom and side panels permit generous airflow to keep equipment operating safely. Front door, side panels and hinged wall bracket lock to secure equipment in general-access areas.

Provide Convenient Access

Most Enclosures include a sturdy hinge between the cabinet and the wall bracket, allowing the cabinet to swing away from the wall for easy access to equipment and cabling.* Top and bottom panels include channels for cable routing. The front door and side panels are removable.



Wall-Mount Enclosure with Hinged Wall Bracket

The innovative Pivoting Wall-Mount Open Frame Rack (SRW012US) allows you to rotate the equipment mounting frame left or right for convenient service access. You can lock the frame in the closed position during normal operation or lock it open while you're configuring or maintaining equipment. *SRW6U does not have a hinged wall bracket.

Adapt to Diverse Applications

Wall-Mount Rack Enclosures are available in a variety of sizes from 6U to 26U. The optional Rolling Caster Kit (SRCASTER) adapts Enclosures to floor-standing applications, allowing them to roll under desks, tables or counters.



Wall-Mount Enclosure with Rolling Casters

Accommodate Standard 1U Servers

The Deep Wall-Mount Rack Enclosure (SRW12US33) provides extra mounting depth for deeper equipment cabinets. It's sized to fit standard 1U servers with ample room for cable management and unobstructed airflow.



Deep Wall-Mount Rack Enclosure


Organize Equipment Economically

Wall-Mount Open Frame Racks provide compact and economical equipment organization for 2-post rack applications. Sturdy steel frames are rated up to 150 lb. Model SRW08U22 adjusts to provide 8U, 12U or 22U of rack space. Model SRW012US includes a rotatable mounting frame for easy access to equipment and cabling.

SmartRack Enclosures accommodate all standard 19-inch rack equipment, regardless of vendor.



Feature Focus

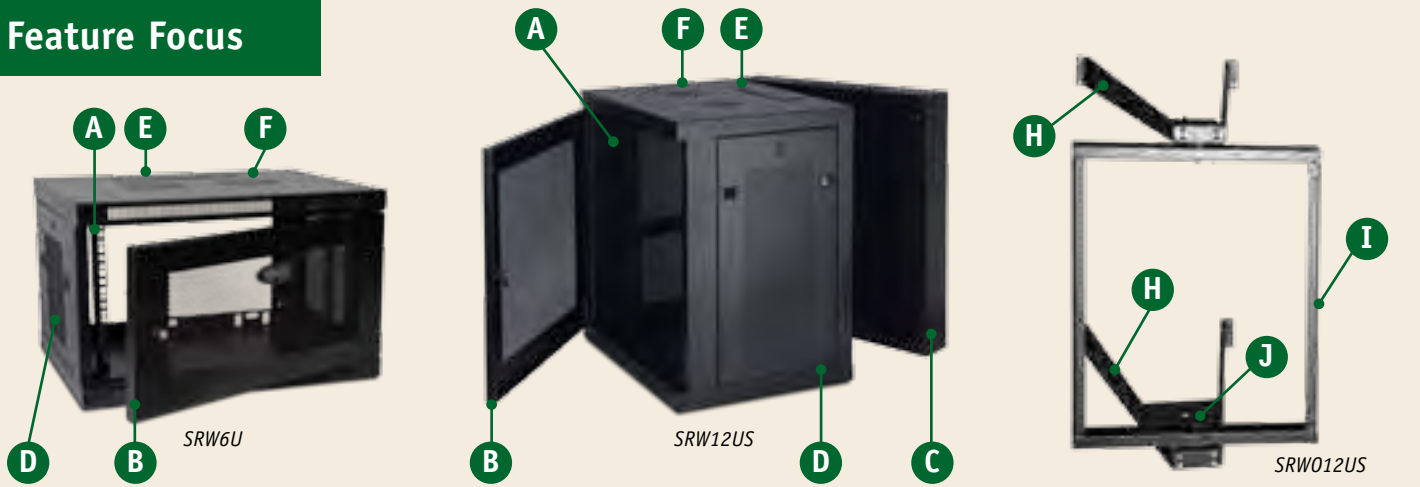

A Adjustable Mounting Rails (4)

Front and rear pairs of vertical rails adjust in one-inch increments.

B Secure Front Door

The door is perforated for ample airflow and locks for secure access. You can reverse the door swing by rotating the unit 180° before installation.

C Hinged Wall Bracket

The wall bracket includes a sturdy hinge that allows the cabinet to swing away from the wall for convenient rear access to equipment and cabling. You can reverse the swing direction by rotating the unit 180° before installation. The wall bracket locks for secure access.

D Perforated Side Panels (2)

Two removable side panels ease installation and service access. The side panels are perforated for ample airflow and lock for secure access.

E Cable Ports (2 or 4)

Ports allow cable routing through the top and bottom of the cabinet or hinged wall bracket (if present). Removable covers block unused ports.

F Top/Bottom Vents (4)

Vents at the top and bottom help remove warm air and draw in cool air. Mounting holes accommodate user-supplied fans for increased airflow.

G Heavy-Duty Rolling Casters (Optional)

An optional Rolling Caster Kit (SRCASTER) adapts Wall-Mount Rack Enclosures to mobile and floor-standing applications, including installation under a desk, table or counter.



H Wall Brackets

The sturdy A-frame wall brackets allow the mounting frame to pivot.

I Rotating Equipment Mounting Frame

You can rotate the mounting frame left or right for easy access to equipment and cabling. Threaded holes support standard 2-post mounting.

J Locking, Adjustable Pivot

Unlock the pivot to rotate the mounting frame, lock it in the standard position or lock it open 90° (left or right) for service access.

Grounding (Not Shown)

Parts are grounded to the frame, which connects to facility ground.

Specifications



Model	Wall-Mount Rack Enclosures (4-Post Mounting)							Wall-Mount Open Frame Racks (2-Post Mounting)			
	SRW6U	SRW10US	SRW12US	SRW12USG	SRW12US33	SRW18US	SRW26US	N060-002	N060-004	SRW08U22	SRW012US
Rack Spaces	6U	10U	12U	12U	12U	18U	26U	2U	4U	8U, 12U or 22U	12U
Front Door	Metal	Metal	Metal	Plexiglas®	Metal	Metal	Metal	None	None	None	None
Hinged Wall Bracket	No	Yes (Standard)	Yes (Standard)	Yes (Standard)	Yes (Heavy-Duty)	Yes (Heavy-Duty)	Yes (Heavy-Duty)	Front Hinge	Front Hinge	No	Pivoting Frame
Standards	TIA/EIA-310-D, IEC 60297-3-100, DIN 41494, IP20 Protection Rating, RoHS, UL 60950							TIA/EIA-310-D, IEC 60297-3-100, DIN 41494, RoHS, UL 60950			
Load Rating*	200 lb	200 lb	200 lb	200 lb	250 lb	250 lb	250 lb	17 lb	35 lb	150 lb	150 lb
Mounting Depth	3 to 16.5 in.	3 to 20.5 in.	3 to 20.5 in.	3 to 20.5 in.	3 to 32.5 in.	3 to 20.5 in.	3 to 20.5 in.	5.5 in.	5.5 in.	18 in.	18 in.
Mounting Holes	Square (Mounting hardware included.)							Round (Mounting hardware included.)			
Height	14.5 in.	21.5 in.	24.75 in.	25 in.	25 in.	35.75 in.	49.75 in.	3.5 in.	7 in.	18 to 42.5 in.	30.5 in.
Width	23.63 in.	23.63 in.	23.63 in.	23.63 in.	23.63 in.	23.63 in.	23.63 in.	19 in.	19 in.	20 in.	19.75 in.
Depth	17.5 in.	21.6 in.	21.6 in.	21.6 in.	33.5 in.	21.6 in.	21.6 in.	6 in.	6 in.	18.25 in.	20.5 in.
Weight	29 lb	55 lb	60 lb	60 lb	100 lb	96 lb	125 lb	2.5 lb	5 lb	10 to 14 lb	15 lb

* Requires a stable mounting surface capable of bearing the full weight of the unit and installed equipment. Rolling applications require the optional SRCASTER accessory (not compatible with Wall-Mount Open Frame Racks).