
The A4(3X) Cable Identification Shrink System

Flexible Polyolefin, irradiation cross linked for strength and flexibility Non-reflective matte finish, UV Resistant 3 to 1 Ratio

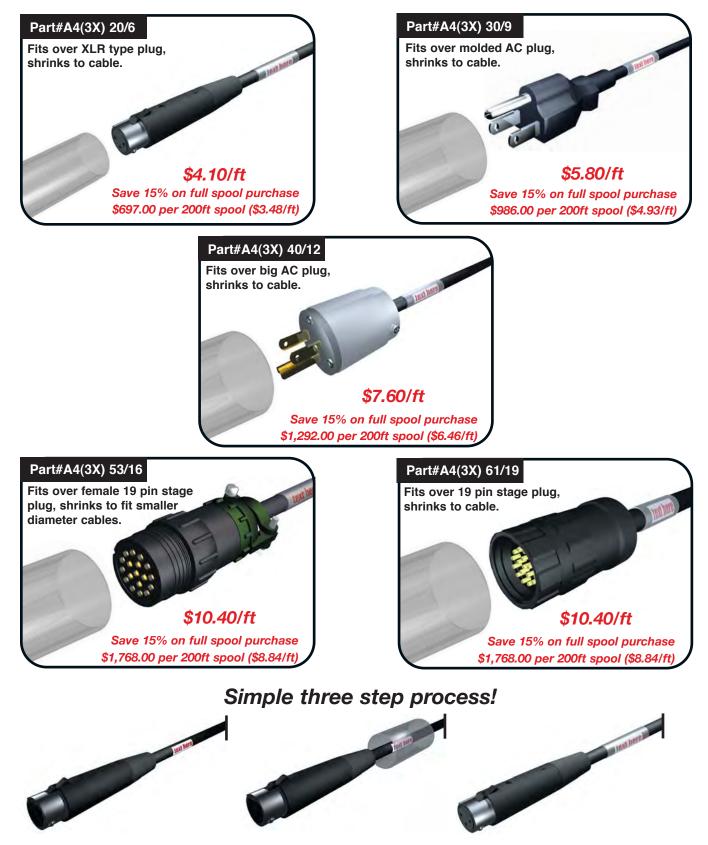

 1. Apply any label onto cable.
 2. Slide tubing over connector.
 3. Shrink tubing with hot air gun.

 We believe the above information to be correct and assume no liability for errors.

Flexible Polyolefin Irradiation cross linked for strength and flexibility Non-reflective matte finish, UV Resistant 3 to 1 Ratio



Wholesale Pricing on Full Spools/Bags

Cable Identification Shrink System

Description	A4(3X) is a flexible, heat shrinkable polyolefin tubing which has excellent weather (UV) resistance with good electrical properties and chemical resistance.
Uses	
Operating Temp	-55°C, to +105°C
Shrink Temp	115°C
Standard Put-up	Spool

Inside Diameter Before Shrinking (minimum)		Inside Diameter After Shrinking (maximum)	Post Shrink Wall Thickness	Full Spool Length	Price:				C	coloi	[.] Sele	ectio	on			
mm	inches	mm (inches)	mm (inches)	in feet	per spool per foot	BK black	BR brown	RD red	OR orange	YL yellow	GN green	BL blue	VI violet	GY gray		
20	0.787	6 (0.236)	1.140 (0.045)	200	\$697.00 \$4.10	X	X	X	X	X	X	X	X	X	X	
30	1.181	9 (0.354)	1.140 (0.045)	200	\$986.00 \$5.80	X	X	X	X	X	X	X	X	X	X	
40	1.575	12 (0.472)	1.140 (0.045)	200	\$1,292.00 \$7.60	X	X	X	X	X	X	X	X	X	X	
53	2.087	16 (0.630)	1.270 (0.050)	200	\$1,768.00 \$10.40	X	X	X	X	X	X	X	X	X	X	
61	2.402	19 (0.748)	1.770 (0.070)	200	\$1,768.00 \$10.40	X	X	X	X	X	X	X	X	X	X	



The above lead time guidelines are estimated only. They may be longer (not usually) or they may be shorter (typically). Regarding products with 100 & 200 day lead time; pricing may vary, and a minimum order with deposit may be required. Oh... and by the way, everything can change without notice and/or liability.