

MODEL 30

1% STAINLESS STEEL PRESSURE GAUGES - DRY OR LIQUID FILLED

Designed for heavy duty service in process and industrial applications such as chemical, petrochemical, power, food processing and biotechnology.



SPECIFICATIONS:

Dial Size:	2-1/2", 4" or 6"
Accuracy:	±1% FS - ANSI Grade 1A
Case:	304SS
Bezel:	304SS Bayonet Lock Type
Socket:	316SS or Monel
Bourdon Tube:	316SS or Monel
Movement:	316SS or Monel with Overload/ Underload Stops
Lens:	Laminated Safety Glass
Pointer:	2-1/2": Non-Adjustable 4": Friction Adjustable 6": Micrometer Adjustable
Dial:	Heavy Gage Aluminum
Connection:	2-1/2": 1/4" NPT Lower or Center Back 4": 1/4" NPT & 1/2" NPT Lower or Lower Back 6": 1/2" NPT Lower or Lower Back
Range:	See Range Chart
Scales:	psi (metric available)
Protection Standard:	IP65 in accordance with NF EN 60529

➤ AVAILABLE OPTIONS:


- U-Clamp (2-1/2" - 4")
- Front Flange (back mount only)
- Back Flange
- Fill (Glycerine Standard)
- Other Fluids Available
- Drag Pointer (4" & dry only)
- Oxygen Cleaning (dry only)

MODEL CODES:

Model 30S	316SS Tube and Socket
Model 30M	Monel Tube and Socket

Estimated Shipping Weights		
DIAL SIZE	DRY	FILLED
2-1/2"	6 oz.	9 oz.
4"	1 lb. 3 oz.	2 lbs.
6"	2 lbs. 1 oz.	3 lbs. 6 oz.

➤ AVAILABLE CASE STYLES AND DIMENSIONS:

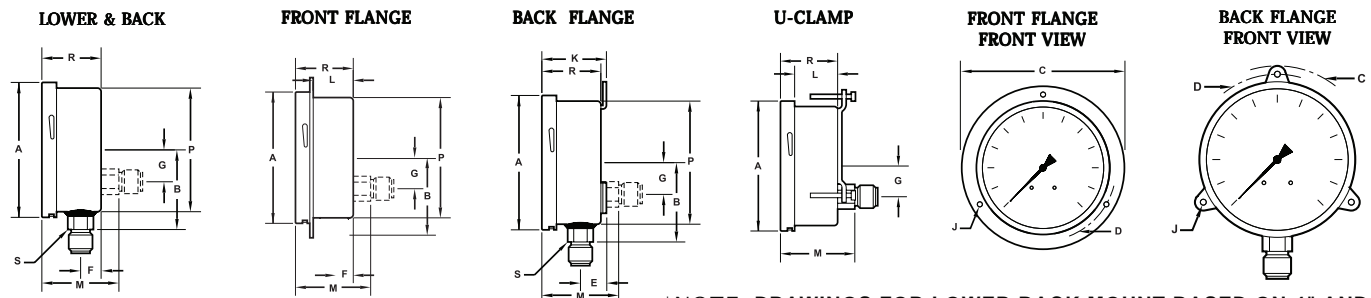

*NOTE: DRAWINGS FOR LOWER BACK MOUNT BASED ON 4" AND 6"

DIAL	A	B	C	D	E	F	G	J	K	L	M	P	R	S
2-1/2"	2.66" (67,6mm)		3.19" (81mm)	2.95" (75mm)		.43" (11mm)		.14" (3,6mm)		.69" (17,5mm)	1.46" (37mm)	2.48" (63mm)	1.12" (28,5mm)	.55" (14mm)
4"	4.18" (106,2mm)	2.48" (63mm)	5.12" (130mm)	4.65" (118mm)	1.00" (25,5mm)	.91" (23mm)	1.24" (31,5mm)	.22" (5,5mm)	2.22" (56,5mm)	1.55" (39,3mm)	2.70" (68,5mm)	3.86" (98mm)	2.15" (54,5mm)	.87" (22mm)
6"	5.91" (150,2mm)	3.35" (85mm)	7.09" (180mm)	6.61" (168mm)	1.00" (25,5mm)	.91" (23mm)	1.24" (31,5mm)	.22" (5,5mm)	2.22" (56,5mm)	1.55" (39,3mm)	2.70" (68,5mm)	5.59" (142mm)	2.15" (54,5mm)	.87" (22mm)



Tel-Tru Manufacturing Company
 408 St. Paul Street, Rochester, New York 14605 USA
 Phone: 585.232.1440 • 800.232.5335 • Fax: 585.232.3857 • E-mail: info@teltru.com • Web: www.teltru.com

► HOW TO ORDER:

To Build A Part Number: Select one code from each column to build your gauge.

DIAL	MODEL CODE	TUBE & SOCKET	CASE	CONN. SIZE	CONN. LOCATION	CONN. TYPE	RANGE & SCALE	OPTIONS
2-1/2"	25 30	S = 316SS M = Monel	S = Stainless Steel	4 = 1/4"	L = Lower C = Center Back	1 = NPT 2 = BSPT 3 = BSP straight	See Range Chart (Up to range of 10,000 psi)	E = Back Flange F = Front Flange* G = Glycerine Fill R = Restrictor S = Silicone Fill U-Clamp ** (sold separately) Oxygen Cleaning ***
4"	40 30	S = 316SS M = Monel	S = Stainless Steel	2 = 1/2" 4 = 1/4"	L = Lower B = Lower Back	1 = NPT 2 = BSPT 3 = BSP straight	See Range Chart	D = Drag Pointer E = Back Flange F = Front Flange* G = Glycerine Fill R = Restrictor S = Silicone Fill V = U-Clamp Oxygen Cleaning ***
6"	60 30	S = 316SS M = Monel	S = Stainless Steel	2 = 1/2" 4 = 1/4"	L = Lower B = Lower Back	1 = NPT 2 = BSPT 3 = BSP straight	See Range Chart	E = Back Flange F = Front Flange* G = Glycerine Fill S = Silicone Fill R = Restrictor Oxygen Cleaning ***

* Front Flange available on Back Mount only
 ** U-clamp on 2-1/2" dial is sold separately. Order part number 95-1701
 *** Oxygen cleaning is sold separately. Order part number 10000006.

Example:

Specs: 2-1/2", Model 30, 316SS, 1/4" Lower, NPT, 0-1500 psi, Glycerine

Select:	25 30	S	S	4	L	1	H2A	G
----------------	-------	---	---	---	---	---	-----	---

Ordering Format: 2530SS4L1H2AG

► STANDARD RANGES:

CODE = RANGE (psi)	INTERVALS (Hg) (psi)	DIVISIONS (Hg) (psi)
V1K = 30" Hg	5"	.2"
Z1A = 30-0-15	5" 5	.5" .2
Z2A = 30-0-30	5" 5	1" .5
Z3A = 30-0-60	10" 10	1" 1
Z4A = 30-0-100	30" 10	5" 2
Z5A = 30-0-160	30" 20	5" 2
Z6A = 30-0-200	30" 20	5" 2

CODE = RANGE (psi)	INTERVALS (psi)	DIVISIONS (psi)
B7A = 0-15	3	.1
C6A = 0-30	5	.2
D6A = 0-60	10	.5
D9A = 0-100	10	1
E4A = 0-160	20	2
E5A = 0-200	20	2
E8A = 0-300	50	2
F2A = 0-400	50	5
F4A = 0-600	100	5
F7A = 0-800	100	10

CODE = RANGE (psi)	INTERVALS (psi)	DIVISIONS (psi)
F8A = 0-1000	100	10
H2A = 0-1500	300	10
H5A = 0-2000	200	20
H9A = 0-3000	500	20
J4A = 0-4000	500	50
J8A = 0-5000	500	50
K4A = 0-10,000	1000	100
K7A = 0-15,000	3000	100

NOTE: INTERVALS AND DIVISION BASED ON 4" DIAL SIZE. CONTACT FACTORY TO REQUEST INFORMATION ON OTHER DIAL SIZES.
 NOTE: ABOVE 15,000 PSI AVAILABLE ONLY WITH 1/2" BSP STRAIGHT CONNECTION (G^{1/2}).
 NOTE: OTHER RANGES AND SCALES AVAILABLE. CONSULT FACTORY.