


BROADWAY™ CONTROL CUBES™

24" x 24"
(610mm x 610mm)

Broadway Control Cubes present an attractive, 'easy to install' solution for acoustic treatment where you want to control primary reflections, eliminate flutter echo and reduce standing waves. The panels are typically spaced in an array leaving some reflective space between panels so as not to completely deaden the room. This helps control acoustic problems while leaving a sense of 'air' or space in the room. The Control Cube's square design is particularly well suited for large wall surfaces where you need treatment and would like to create distinctive architecturally pleasing patterns. Because the 24" x 24" square panels can be installed into a traditional T-bar grid Control Cubes can 'upgrade' the absorption of typical drop ceilings. This can be particularly effective in commercial installations such as noisy offices, call centers and boardrooms that need added sound control. Broadway Control Cubes come in a choice of 2 thicknesses and 3 colors and may be ordered with or without a beveled edge.

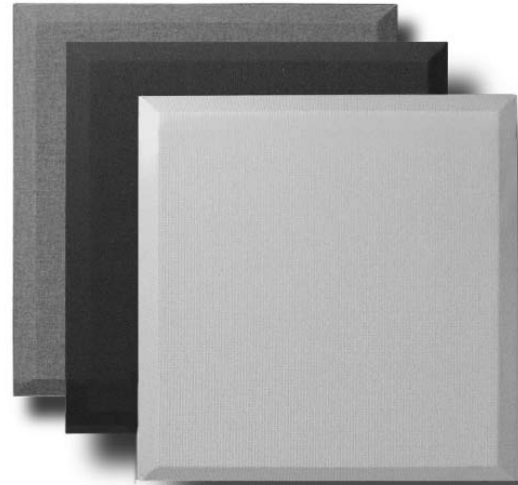


SPECIFICATIONS:

DIMENSIONS	24" x 24" (610mm x 610mm)
PANEL DEPTH	1" (25mm), 2" (51mm)
CORE MATERIAL DENSITY	Formed, semirigid inorganic glass fibers, 6.0 lbs pcf (96 kg/m ³)
FABRIC FACING	Acoustically transparent polyester
BACKING	Sealed with acoustically transparent micro-mesh
EDGE TREATMENT	Sealed and hardened with resin

ABSORPTION CHARACTERISTICS:*

PANEL DEPTH	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	NRC
1" Depth	0.17	0.28	0.81	1.00	1.02	0.95	0.80
2" Depth	0.45	0.83	1.07	1.00	1.01	1.00	1.00

* Testing performed by Riverbank Acoustical Laboratories. The test method conformed explicitly with the requirements of the ASTM Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method: ASTM C 423-02a and E795-05.

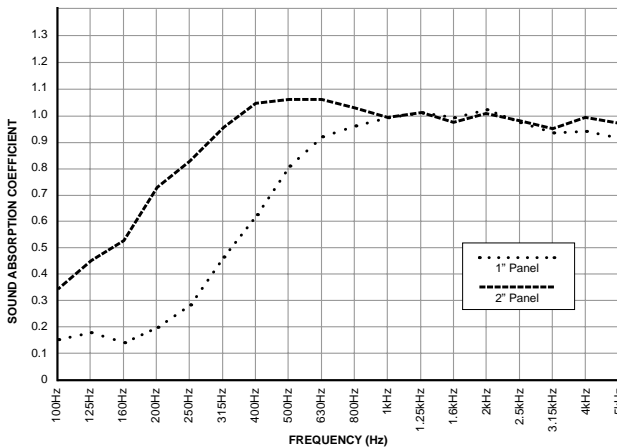


FIRE & BURN PERFORMANCE:**

TEST	CLASS	FLAME SPREAD	SMOKE DENSITY
ASTM E 84-05	1 OR A	15 FSI	155 SD
CAN/UL-S102	1 OR A	15 FSC1	155 SD

** Test data provided by Bodycote Materials Testing Inc. This method, designated as ASTM E 84-05, "Standard Method of Test for Surface Burning Characteristics of Building Materials", is used to measure and describe the response of materials, products, or assemblies to heat and flame under controlled conditions, but does not by itself incorporate all factors required for fire-hazard or fire-risk assessment of the materials, products, or assemblies under actual fire condition.

APPLICATION:

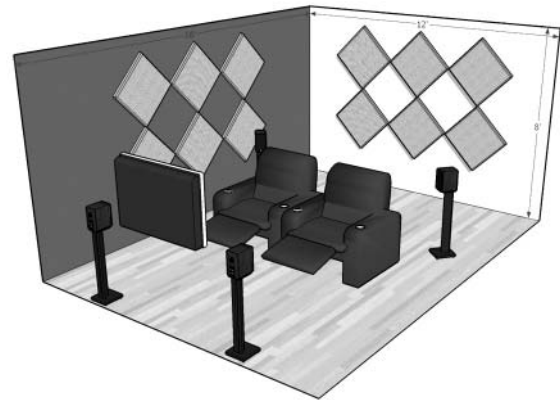

PRODUCT RANGE:

ORDER NO.	COLOR	DEPTH	EDGE	COVERAGE	BOX QTY.
F101-2424-00	Black	1" (25mm)	Square	48 sq/ft (4.46 sq/m)	12
F101-2424-03	Beige				
F101-2424-08	Grey				
F102-2424-00	Black	2" (51mm)	Square	48 sq/ft (4.46 sq/m)	12
F102-2424-03	Beige				
F102-2424-08	Grey				
F122-2424-00	Black	2" (51mm)	Beveled	48 sq/ft (4.46 sq/m)	12
F122-2424-03	Beige				
F122-2424-08	Grey				

MOUNTING OPTIONS:

SURFACE IMPALER	OFF-SET IMPALER	CORNER IMPALER
F101-1000-00	F101-1001-00	F101-1002-00
24 per box	8 per box	8 per box