

# Rackmount Lighting

## Rackmount Lighting



Spec. #  
**96-01044**  
for full  
product  
info.

Retractable LED light provides evenly distributed illumination for component viewing.



**PDLT-815RV-RN**  
shown closed



**LT-1RA**  
shown closed



**PDLT-815RV-RN**  
shown with light  
out and lit

Part #	# of circuits	Amperage	Rear Outlets	Surge Protection	Cord Length	Chassis depth	Finish
PDLT-815RV-RN	1	15 Amp	8	Yes, 2-stage with remote notification	9'	13-1/2"	black powder coat
PDLT-815RVA	1	15 Amp	8	Yes	9'	13-1/2"	black brushed and anodized
LT-1R			light only		9'	13-1/2"	black powder coat
LT-1RA			light only		9'	13-1/2"	black brushed and anodized

## Gooseneck Rack Lights

These bright rack lights (187 Lumens\*) allow for more rack visibility, and the flexible strong gooseneck lets you direct the light where it is needed most. The reliable, long lasting LEDs have a 20,000 hour bulb life, and these lights include an on/off button for instant control. Available as single light with USB connector or 120V adapter, or as a rackmount panel with dual gooseneck lights. (\*Contact us for details.)



**LT-GN**



**LT-GN-PL**



**LT-GN-PNL**



**LT-GN-PNL shown in use**

Part #	Description	Powered By
LT-GN	gooseneck LED light with USB connector	PDLT-815RVA, PD-915RV-RN, LT-1Rx or any computer w/ standard USB port
LT-GN-PL	gooseneck LED light with 120V adapter	any 120V power outlet, including vertical power strips
LT-GN-PNL	one rackspace rackmount panel with dual gooseneck LED lights	any 120V power outlet, including vertical power strips

## Gooseneck Magnetic LED Worklight

This ultra bright worklight illuminates the inside of racks, for easy viewing of equipment and cabling during system installation and servicing. 32 LED lights are positioned at the ideal angle for high visibility and brightness – measured to be 395 Lumens\*. Flexible 16" long gooseneck allows light to be directed where it is needed most, and the strong, scratch resistant magnetic base attaches to any steel surface.

(\*Contact us for details.)

Part #	Description
LT-GN-WL	magnetic worklight, gooseneck, Includes 32 LED Lights



## LT-DEC LED Light



Spec. #  
**96-01046**  
for full  
product  
info.

Designed to fit any standard Decora® device opening, the LT-DEC opens and illuminates when pressed. Running on a standard included 12 VDC power supply, multiple units can be daisy-chained together to use only one outlet with the JDC-12X18 jumper. The jumper reduces the number of power supplies required for an installation and can be used to power the LT-DEC light and TEMP-DEC temperature display, see pg. 121. Pre-configured panels are available with select pre-installed Decora products.

Part #	Description
LT-DEC	retractable LED light
LT2P	one space panel, pre-configured with 2 LT-DEC lights
LT2-T1P	one space panel, pre-configured with 2 LT-DEC lights, 1 TEMP-DEC temperature display
JDC-12X18	18", 12 volt DC jumper wire, 2 pieces



**LT-DEC**  
shown with  
light out and lit



**LT2P**



**LT2-T1P**



# Work Light and RPS Series Remote Power Switch

## Magnetic Work Light

**ENHANCED!**

Designed for use when installing and servicing equipment, the WL-60 provides convenient illumination in rack enclosure interiors. The unit features a strong, scratch resistant magnetic base that attaches to any steel surface and a quadruple-jointed support arm makes it easy to aim the light, which stays where you put it.

The WL-60 now includes a 13 watt fluorescent bulb, aluminum shade with on/off switch and an ultra-long 18' line cord that eliminates the need for an extension cord.

Part #
WL-60



## RPS Series Remote Power Switch


The RPS Series remote power switch provides the ability to power complete 15 Amp systems on and off without the need to access equipment. Perfect for installations where it is desirable to keep users from having the ability to make any adjustments, the RPS Series power switch mounts in the face of select racks, and is also available to mount in a single space panel or UCP Series Universal Connector Panel. Available with a switch or with a keylock when security is a concern, the RPS has been tested in the most demanding situations. The RPS fits in any Decora® device opening, features removable ears and can also be mounted to any flat surface. The RPS has an internal 21 Amp switch (no relay!) for enhanced reliability and longevity.

DWR, SR, TOR, ISRK and PTRK Series enclosures feature knockouts for mounting of the RPS Series remote power switch without the need for any additional accessories.



7' cord reaches power placed within any enclosure

**RPS**  
switched remote power switch

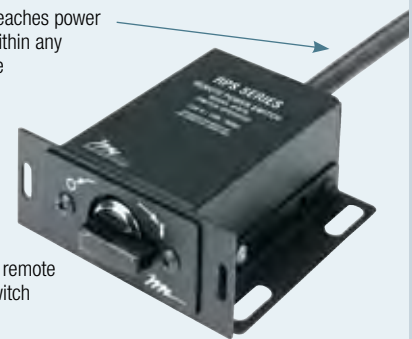

**RPS-K**  
keylocked remote power switch




Part #	Description
RPS	15 Amp remote power switch
RPS-K	15 Amp remote power switch, keylocked

**UL File #: E232496 UL Standard #: 244A: Appliance Controls 120 VAC, 15 Amps, 60 Hz**

Need additional keys? Replacement sets are available, sold in sets of two.

Part #	Description
RPS-KEY	additional set of 2 keys

features easy to use "Piggy-back" 15 Amp plug



**Remote Power Switch**

RPS Series remote power switch provides remote power control of system within enclosure, face, top and bottom of DWR, SR, TOR, ISRK and PTRK enclosures

