

Shower/Tub Accessories



B-4390 RECESSED HEAVY-DUTY SOAP DISH AND BAR

Type 304 stainless steel, matte polished finish. Mounting clamp for stud walls. Unit 7 ³/₁₆" W, 5" H (185 x 125mm). Rough Wall Opening: 6" W, 4" H, 4" min. depth (150 x 100 x 100mm). Barrier-Free Mtg. Ht.: 38–48" (965–1220mm) above the finish floor on same wall as shower head.

B-4380 Similar to B-4390, but without bar.



B-518 FOLDING SHOWER SEAT

Complies with ADA Barrier-Free Accessibility Guidelines. Foam-padded, white, water-resistant Naugahyde seat 1 ¹/₂" (38mm) thick, with enclosed ¹/₂" (13mm) plywood base. Frame and mounting brackets are type 304 stainless steel and feature self-locking mechanism. Supports up to 360 lbs (163 kg) when properly installed. Seat 32 ⁷/₈" (835mm) wide, projects 22 ¹/₁₆" (575mm) from wall. Universal/Barrier-Free Mtg. Ht.: 17–19" (430–485mm) from top of seat to floor. Left-hand seat.




B-517 Similar to B-518, but with right-hand seat.



B-5191 FOLDING SHOWER/DRESSING AREA SEAT

Compact design. Seat is constructed of durable, water-resistant, ivory-colored, ⁵/₁₆" (8mm) thick solid phenolic. Frame and mounting bracket are type 304 stainless steel and feature self-locking mechanism. Supports up to 450 lbs (204 kg) when properly installed. Seat 18" (455mm) wide, projects 15 ³/₁₆" (400mm) from wall. Universal/Barrier-Free Mtg. Ht.: 17–19" (430–485mm) from top of seat to floor.

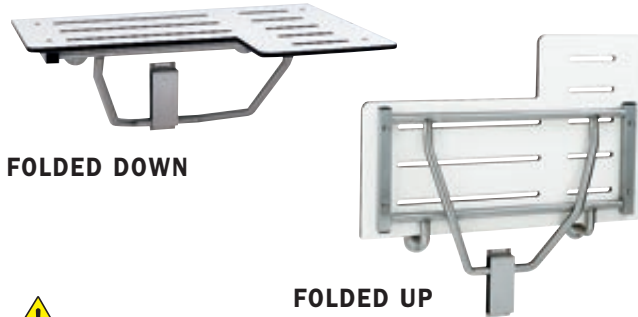

FOLDED DOWN

FOLDED UP



B-5181 REVERSIBLE FOLDING SHOWER SEAT

Complies with ADA Barrier-Free Accessibility Guidelines. Seat is constructed of durable, water-resistant, ivory-colored ¹/₂" (13mm) thick solid phenolic. Reversible for left- or right-hand field installation. Frame and mounting brackets are type 304 stainless steel with self-locking mechanism. Supports up to 360 lbs (163 kg) when properly installed. Seat 33" (840mm) wide, projects 22 ⁵/₁₆" (565mm) from wall. Universal/Barrier-Free Mtg. Ht.: 17–19" (430–485mm) from top of seat to floor. Left-hand seat shown.



CAUTION NOTE

Rectangular Folding Shower Seat: B-5191

Rectangular folding shower seat, when properly installed and maintained, has sufficient strength to support a single user up to a maximum static load of 450 lbs (204 kg). In the interests of safety and the protection of end users, this seat should not be used to support weights exceeding 450 lbs (204 kg). Failure to abide by this warning may result in seat malfunctioning, potentially causing minor to moderate injury.

TOTAL WEIGHT ON SEAT MUST NOT EXCEED 450 LBS (204 KG).



CAUTION NOTE

L-shaped Folding Shower Seats: B-517, B-518, B-5181

L-shaped folding shower seats, when properly installed and maintained, have sufficient strength to support a single user up to a maximum static load of 360 lbs (163 kg). In the interests of safety and the protection of end users, these seats should not be used to support weights exceeding 360 lbs (163 kg). Failure to abide by this warning may result in seats malfunctioning, potentially causing minor to moderate injury.

TOTAL WEIGHT ON SEAT MUST NOT EXCEED 360 LBS (163 KG).

DESIGNER'S NOTE:

Solid phenolic seats available in other colors on special order. See Bobrick Solid Phenolic Color Guide.