

STANDARD AND INTERLOCKING LEAD BRICKS

Exclusively developed for shielding of high energy x-rays:

- Nuclear Lead Shielding
- P.E.T. (Positron Emission Tomography) Shielding
- Gamma Knife Rooms
- HDR Rooms
- Linear Accelerator Shielding
- Standard Lead Bricks: All sizes available.

INTERLOCKING LEAD BRICKS

Radiation Protection Products' interlocking lead bricks are tongue and grooved. Available in various thickness, heights and lengths:

- 1" x 4" x 12"
- 1 1/2" x 4" x 12"
- 2" x 4" x 8"
- 2 1/2" x 4" x 12"

Shown (on right): Interlocking 2" x 4" x 8"

LEAD BRICK – SPECIFICATIONS




Lead Bricks (standard) shall:

Meet or exceed the federal specification
QQL-201-F

Grade C, see NCRP #49, #33, #35

Lead Bricks (interlocking) shall:

Meet or exceed the federal specification
QQL-171 Grade C.

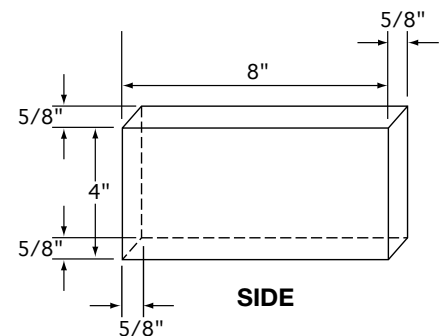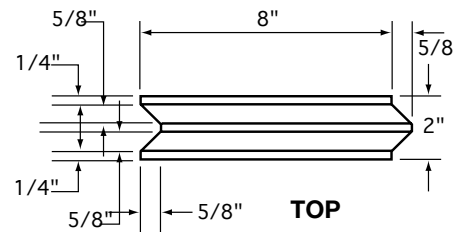

1000 Superior Boulevard, Suite 310 • Wayzata, MN 55391
1.888.RINGRPP (1.888.746.4777) • TOLL FREE FAX: 1.866.554.8445
www.radiationproducts.com

servicing the nation's lead needs for over 50 years with a full line of radiation shielding products