

CALRAD

25 Series - Controls

SLIDE CONTROLS

Modernize your equipment with the use of Slide Controls that have rugged construction and extra smooth action. 20% tolerance. Solderable terminals.

4 7/16" Mounting Centers, 4 1 1/16" x 1/2" x 5/16" Including Terminals

25-271.....25 watt, 50KΩ Linear Taper **25-276**.....0.5 watt, 50KΩ Audio Taper


25-275.....5 watt, 10KΩ Audio Taper **25-277**.....5 watt, 100KΩ Audio Taper

3 5/32" Mounting Centers, 3 7/16" x 1/2" x 5/16" Including Terminals

25-372.....0.25 watt, 1KΩ Linear Taper **25-379**.....0.125 watt, 100KΩ Audio Taper

Dual gang slide 2 1 1/16" Mounting Centers, 2 7/8" x 3/4" x 7/32" P.C. Leads

25-39010KΩ Dual Linear Taper **25-391**25KΩ Dual Linear Taper



Pro Audio Use

25-341 MONO "L" PAD*

Flat frequency response, natural reproduction is obtained by adjusting for the difference in efficiency ratios. Adjustment ±17% of the normal rated impedance. "L" pads are 8Ω impedance. Black plastic contour knob. Mounts in 3/8" hole. Bushing 3/4" long. 10-25 watts. 0-40dB attenuation. 300° rotation. Solderable terminals.



Pro Audio Use

25-342A STEREO "L" PAD*

Single shaft control for maintaining proper output level. Providing positive equal audio power to each speaker. Has 3/8" x 32 threaded bushing 7/8" long. Impedance: 8Ω. 10-25 watts. Solderable terminals. See wiring diagram on page 22.




50 WATT HEAVY DUTY AUDIO LEVEL CONTROLS ("L" PAD)

25-352 MONAURAL* (Body Size: 2" x 2" x 1 1/16" Hole Size 3/8")

25-352-S, Same as 25-352 but with short shaft.

25-353 STEREO* (Body Size: 2" x 2" x 1 3/4" Hole Size 3/8")

Specially designed "L-Pads" to be used in high power audio or speaker systems. Made of rugged high quality materials for neat appearance and smooth operation. 1/2" long threads are provided for ease in mounting in thick cabinets. Complete with knob, hardware for mounting. Specify monaural or stereo. Impedance: 8Ω. See wiring diagram on page 22.

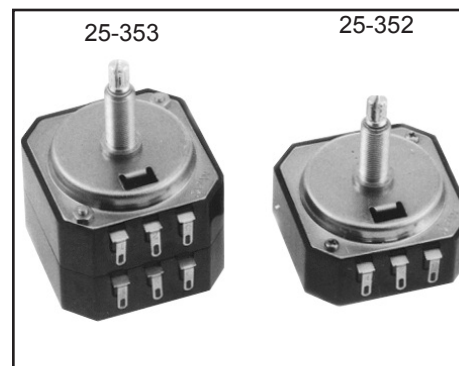

100 WATT HEAVY DUTY AUDIO ATTENUATORS ("L" PAD)

25-452 MONAURAL*

25-453 STEREO*

Controls speaker volume in a remote location. Rated up to 100 watts at 8Ω. Extra long 3/4" bushing for mounting in standard 3/8" diameter hole. Complete with front plate and knob. Heavy solderable terminals. See wiring diagram on page 22. Dimensions: 5.5"(W) X 3.14"(H) X 3.75"(D)

