

SOAP DISPENSER VANITY MOUNTED

PRODUCT SPECIFICATIONS:

Piston & Spout: Highly polished corrosion resistant, type 304 stainless steel. Assembly rotates 360 degrees.

Flange & Collar: One piece highly polished chrome on brass.

Valve Assembly: All purpose bellows valve, fabricated of ABS material, with stainless steel return spring.

Shank: Chrome on brass, secured to collar. Special key provided that unlocks collar for servicing.

Globe & Collar: High impact translucent polyethylene.

Unit	Spout	Capacity	Type Finish
U128PC	4" (102)	34 oz.	Polished s/s
U128PCA	6" (152)	34 oz.	Polished s/s

Recommend type soaps without chloric solution for proper operation.
Preventative Maintenance: Each dispenser should be flushed out aprx. Every 30 days with warm water to prevent supply tube and spout from clogging with old soap. Do not use abrasive cleaners to clean unit.

*All vanity soap dispensers are designed to be serviced above the counter.




SEAT COVER DISPENSER SURFACE MOUNTED

PRODUCT SPECIFICATIONS:

Dispenser: Unit is fabricates type 304 #22 gauge stainless steel with a #4 satin finish. Beveled edge around the dispensing areas ensures a clean dispensing area that prevents product from tearing and injury. Loading of product is accomplished from below without having to open any locking mechanism or access panel. Hat style mounting brackets provides added rigidity for body and acts as a support for the packing.


Overall sizes: 15 3/4" w x 11"H x 1 3/4"D

Capacity: 500 single fold or 500 half fold covers.

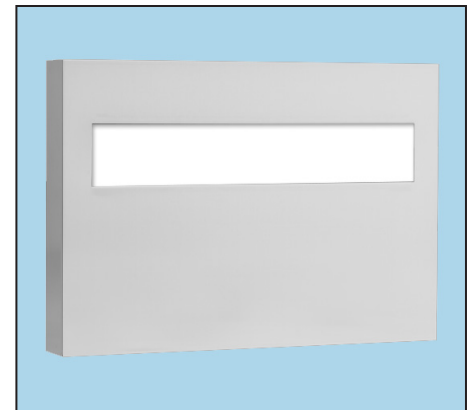

DRAWINGS

TOILET TISSUE DISPENSER

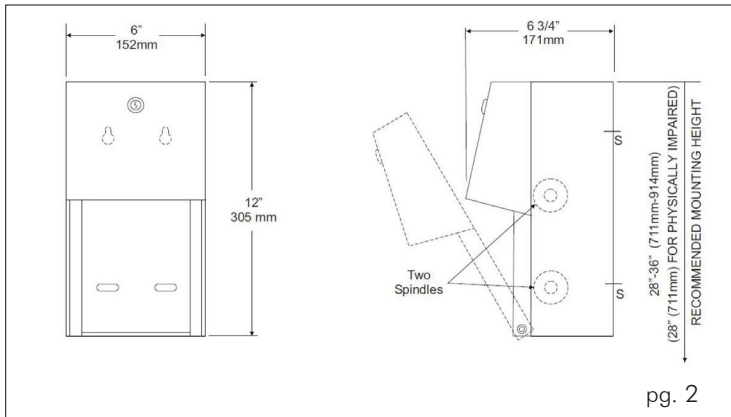

TOWEL DISPENSER SURFACE MOUNTED

