


40 Series - VGA, Component, Composite Video Converter/Scalers

40-482 VGA\ COMPONENT VIDEO TO HDMI CONVERTER

Includes 3 ft. VGAM-M video and 3.5mm M-M audio cables. Front panel L.E.D. power indicator. If you have PC or Laptop with VGA output, or you have a device like PSP, DVD, Wii, X-box with component output, and you wish to connect it to an HDTV. The 40-482 has a builtin scaler that up-scales a standard analog VGA signal or Component Video with audio to a single HDMI output. The output is fixed at 720p to avoid compatibility problems. Size: Includes 5Vdc, 2A power supply, 3 ft. VGA M-M, 3.5mm M-M cables.

Accepts these PC VGA resolutions: 640x480 (60Hz, 75Hz, 85Hz), 800x600(60Hz, 75Hz, 85Hz), 1024x768 (60Hz, 75Hz, 85Hz), 1280x720 (60Hz), 1280x768(75Hz), 1280x960(60Hz).

Accepts these Component Video (Y,Pb, Pr) resolutions: 480i (60Hz), 480P (60Hz),576i (50Hz), 576P(50Hz),720P (50Hz, 60Hz).

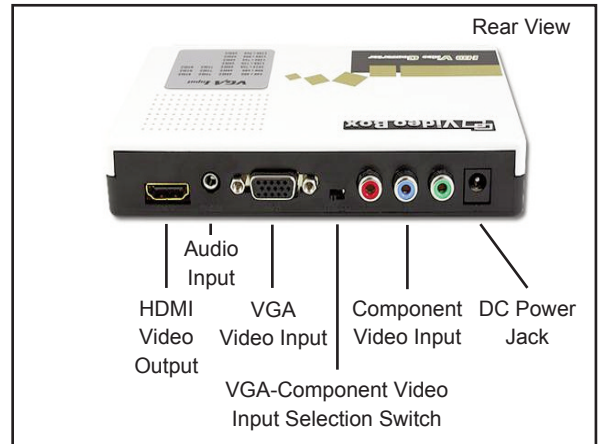


40-720PHD COMPOSITE VIDEO\ S-VIDEO TO HDMI CONVERTER

The 40-720PHD converts composite video/s-video/stereo audio to HDMI. Accepts NTSC 3.58, Pal-M and Pal-N composite video and S-Video inputs as well as 3.5mm stereo audio and converts the signals to 720P HDMI with audio. Audio is incorporated into the HDMI output as well as the 3.5mm stereo output simultaneously. Video inputs auto detect video source and a front panel L.E.D. indicates shows Red for S-Video, Green for composite video. Selectable vertical rates of 50/60Hz. DVI-D compatible with Calrad adapter 35-712A (Not Included). 5Vdc power supply included. Size: Length 5.75" x Width 3" x Height 1.25".



Front View



Rear View



35-712A
HDMI Male to DVI-D Female Adapter with Gold plated contacts.



40-VSRGB COMPOSITE VIDEO \ S-VIDEO TO COMPONENT VIDEO CONVERTER / SCALER

The 40-VSRGB Converts composite video and S-video to component video Y, Pb, Pr or Y, Cb, Cr. Easy plug and play automatically senses input source system. Will work with NTSC 3.58, NTSC 4.43, Pal-M, Pal-N and Secam formats. Selectable inputs between RCA composite video and 4 pin S-video also selectable outputs between Y, Pb, Pr or Y, Cb, Cr. Size: Output cable and 5Vdc power supply included. L.E.D signal indicator, Green=composite video, Red=S-Video, Flicker=no synce. Size: Length 4" x Width 2.5" x Height 1".



40-880A TWO WAY PC \ COMPONENT OR COMPONENT \ /PC CONVERTER WITH OSD

This Bi-directional 2 way scaler converts PC VGA to HD component video or HD component video to PC VGA. Supports HD resolutions of 480P, 720P, 1080i and 1080P and PC resolutions of VGA, SVGA, XGA, SXGA, UXGA, WXGA, WSXGA and WUXGA. The comprehensive OSD menu allows users to adjust output resolutions, contrast, brightness, hue, saturation and sharpness. Loop out for local monitor. 5 Volt DC power supply and VGA, VGA to Component cables are included.

Specifications:

Input port: 1 X HDDB15 Female
Output port: 1 X HDDB 15 Female
Loop port: 1 X HDDB15 Female
Power Supply: 5Vdc, 1A
Dimension: Length 5.75" X Width 4" X Height 1"

OSD Menu Controls

