

CALRAD

10 Series - Microphones


10-12

MINIATURE ELECTRET CONDENSER MICROPHONE

This microphone is designed for all uses. ON/OFF switch enclosed on the belt clip for easy use. Designed for quality at a low cost. 15ft. cable is terminated with a 3.5 mm plug.

Specifications:

Type	Electret Condenser	Impedance	1K Ω (at 1KHz)
Frequency Response	50-18KHz	Power Supply	1.5 volt AAA battery (included)
Sensitivity	-65 dB at 1000Hz	Accessories	3.5mm to 1/4" adapter, Battery, Tie Clasp, Wind Screen
Polar Pattern	Omni-Directional	Color	Black
Power Supply Size	2.51" L x 1.84" W x .54" H	Cord to Mic Length	38"
Microphone Size25" L x .54" W		

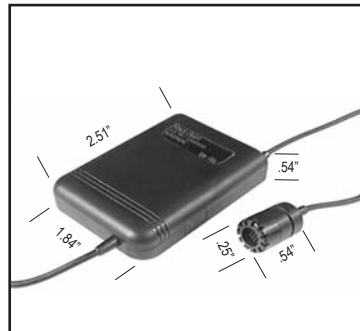

10-20

DUAL IMPEDANCE DYNAMIC MICROPHONE

Features a uni-directional element, built-in pop and noise filter and a 20 ft. cable terminated in a 1/4" phone plug with mic holder.

Specifications:

Type	Dynamic	Dual Impedance	600 Ω 50K Ω
Frequency Response	80-12KHz	Sensitivity	500 Ω -72 dB +/- 3db
Cord Length	20 feet	Sensitivity	50K Ω -54 dB at 1 KHz
Dual Impedance	600 Ω 50 K Ω		



10-22

ECONOMY DYNAMIC MICROPHONE

This uni-directional dynamic microphone has a 10 ft. cable terminated to a 1/4" phone plug. A windscreen is built into the wire mesh ball head to prevent hiss, pop, and wind noise.

Specifications:

Impedance	500 Ω	Sensitivity	-72 dB \pm 3 dB at 1 KHz
Frequency Response	80-12 KHz	Color	Black



10-3

GOOSENECK PAGING MICROPHONE

Uni-directional 18" gooseneck microphone with XLR male socket with push On/Off talk button.

Specifications:

Low-Z	600 Ω .
Sensitivity:.....	80dB \pm 3dB.
Frequency response:	60-12KHz.
Color:.....	Black.

