

## CHANNEL FRAMED MIRROR

PRODUCT SPECIFICATIONS:

**Frame:** Fabricated of type 304 #20 ga stainless steel, #4 satin finish. Roll formed 1/2" x 1/2" x 1/2" channel frame has mitered corners and secured with stainless steel rivet.

**Mirror:** Distortion free 1/4" polished plate glass, coated and sealed with uniform electrolytic copper plating, guaranteed against silver spoilage for a period of 15 years.

**Filler:** Full size, 1/8" shock absorbing, water resistant, nonabrasive, polyethylene padding protects all concealed mirror surfaces.

**Back:** #20 ga pre-plated galvanized steel, with embossed horizontal louver mounting brackets. Embossed theft resistant pressure activated clip lock device, locks mirror in place to wall hangers.

**Hangers:** Fabricated of #20 ga pre-plated steel galvanized steel with mounting points.

Mirrors conform to Federal Specifications DD-M-00411b & DD-g-541D.

**Options:**

VC: Safety Glass (Vinyl clad)

T: Tempered Glass

LG: Laminated Glass


PM: Plastic Acrylic

8B: #8 Reflective s/s

**Max Size-8B mirrors:** 72" x 36"

Mirrors are always ordered Width x Height

Fabricated to a tolerance of  $\pm 1/8"$

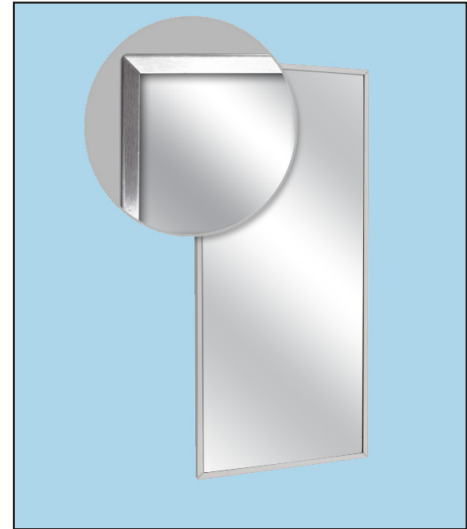

## GRAB BAR

PRODUCT SPECIFICATIONS:

**Tubing:** Fabricated of type 304 #18 g stainless steel with a #4 satin finish. Available in 1 1/2" outside diameter. All bends are formed by an automatic mandrel bending process. All bars maintain a constant 1 1/2" offset.

**Finish:** Standard finish is a #4 satin finish. For a non-stop finish (peened) add suffix X to model number (Ex. UG3X-A)

**Flanges:** Snap flanges are fabricated of 3" diameter, 3/8" deep drawn type 304 #22 ga stainless steel with #4 satin finish to match tubing. Flanges have dimples that secure over mounting plate.

**Strength:** Bars with a 1 1/2" offset clearance will support loads in excess of 900 lbs when properly installed. Bars with greater offsets will support loads up to 250 lbs when properly installed.

**Installation:** Before installing grab bars, verify with all state and local codes requirements on bar diameter and type finish. Recommended mounting heights for grab bars are 33" – 36" centerline above finished floor. All mounting of grab bars when possible should have in wall mounting back plates. Find centerline mounting points and place bar on line making sure to be on center. Transfer mounting points (3 per flange) to wall. Drill pilot holes and secure bar with proper anchors per application. Snap cover mounting plate.

**Standard Lengths:** (Other sizes available upon request): 12", 16", 18", 24", 30", 32", 34", 42", 48", 50", 52", 54", 56"

