

STEAM TRAPS

FTE & FTES Series

Float & Thermostatic Steam Trap

Watson McDaniel reserves the right to change the designs and/or materials of its products without notice.
©2010 Watson McDaniel Company

Model	FTE	FTES
Sizes	1 1/2", 2", 2 1/2"	2 1/2"
Connections	NPT	NPT, SW, FLG
Body Material	Ductile Iron	Cast Steel
PMO Max. Operating Pressure	200 PSIG	300 PSIG
TMO Max. Operating Temperature	450°F	450°F
PMA Max. Allowable Pressure	300 PSIG up to 450°F	300 PSIG up to 750°F
TMA Max. Allowable Temperature	450°F @ 300 PSIG	750°F @ 300 PSIG



TYPICAL APPLICATIONS

PROCESS: The **FTE & FTES Series** float and thermostatic steam traps are used in HVAC and on industrial process equipment with very high load requirements. These high capacity steam traps are typically used on reboilers, absorption chillers, large air handling coils, large heat exchangers, and other large process equipment.

HOW IT WORKS

Float and thermostatic steam traps have a float and thermostatic element that work together to remove both condensate and air from the steam system. The float, which is attached to a valve, rises and opens the valve when condensate enters the trap. Air is discharged through the thermostatic air vent to the outlet side of the trap. The thermostatic air vent closes when steam enters the trap.

FEATURES

- Ductile Iron has a higher pressure and temperature rating and is more resistant to shock loads than Cast Iron.
- Cast Steel Body will allow operating pressures and temperatures up to 300 PSIG and 450°F.
- High Capacity steam trap for draining large process equipment (over 100,000 lbs/hr)
- All stainless steel internals with hardened seat and wear parts
- In-line repairable is simplified by having all internals attached to the cover
- Welded stainless steel thermostatic air vent resists shock from water hammer. Live orifice air vent is available for superheated applications
- Excellent air handling capability allowing air to be discharged rapidly and steam to enter the system quickly during start up
- F & T traps discharge condensate immediately as it is formed (No condensate will back up into the system)

SAMPLE SPECIFICATION

The trap shall be of float and thermostatic design with ductile iron or cast steel body. The trap must incorporate all stainless steel internals with hardened seat and welded stainless steel thermostatic air vent. Trap must be in-line repairable.

INSTALLATION

Isolation valves should be installed with trap to facilitate maintenance. The trap must be level and upright for the float mechanism to operate. Larger traps should not be supported by the piping system alone. Trap must be sized and located properly in the steam system.

MAINTENANCE

All working components can be replaced with the trap body remaining in-line. Repair kits include thermostatic air vent, float, valve seat and disc, and gaskets. For full maintenance details see Installation and Maintenance Manual.


OPTIONS

Live orifice air vent for superheated steam applications.

Parallel-pipe inlet/outlet connections are standard as shown. An optional In-line inlet/outlet connection is available;

FTE & FTES Series

Float & Thermostatic Steam Trap

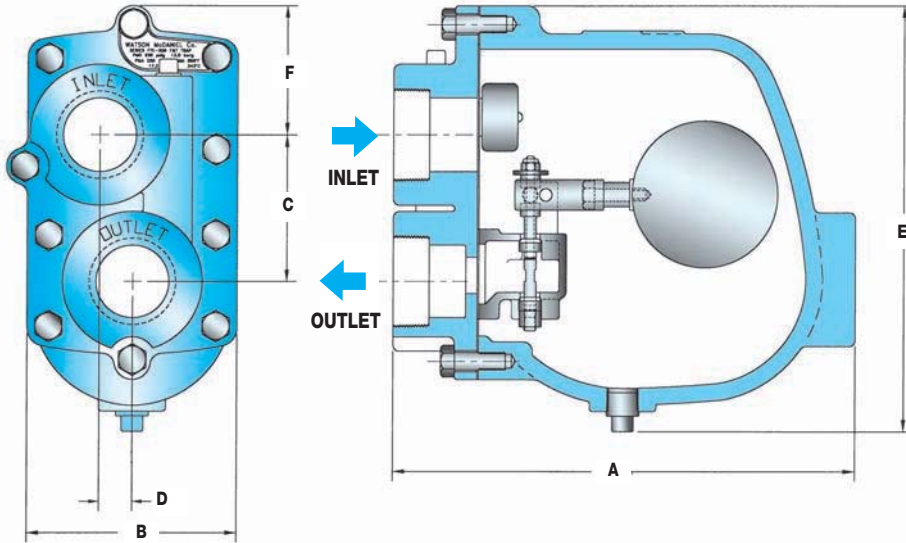

DIMENSIONS & WEIGHTS – inches/pounds

Size/Model	A	B	C	D	E	F	Weight
2" FTE-20	12.6	5.7	4.5	0.5	11.1	3.9	54
2" FTE-50	16.0	8.4	7.3	1.4	15.6	3.6	146
2 1/2" FTE-50	15.5	8.4	7.3	1.4	15.6	3.6	140
2 1/2" FTE-125	15.5	8.4	7.3	1.4	15.6	3.6	146
1 1/2" FTE-200	9.6	4.3	3.0	0.7	8.8	2.6	35
2" FTE-200	12.6	5.7	4.5	0.5	11.1	3.9	65
2 1/2" FTE-200	15.5	8.4	7.3	1.4	15.6	3.6	146
2 1/2" FTES-300	15.5	8.4	7.3	1.4	15.6	3.6	146

Note: 2 1/2" FTES-50, 125 & 200 have same dimensions and capacities as FTE-50, 125 & 200.

MATERIALS

Body & Cover (FTE)	Ductile Iron
Body & Cover (FTES)	Cast Steel, ASTM A-216
Cover Screw	Grade 5 Carbon Steel
Cover Gasket	Grafoil
Valve Discs	Stainless Steel, AISI 17-4PH
Main Valve Assembly Housing	Stainless Steel, AISI 17-4PH
Valve Assembly Gasket	Garlock
Ball Float	Stainless Steel, AISI 304
Thermostatic Vent	Stainless Steel, AISI 300 Optional: Live orifice air vent

HOW TO SIZE/ORDER

From the capacity chart, select the model that can handle the working pressure of the system (PMO). Select the trap that will meet the capacity requirements at the differential pressure. Example:

Application: 2,700 lbs/hr at 150 PSIG working pressure and 1/4 PSI differential pressure

Size/Model: 2" FTE-200, NPT connections

CAPACITIES – Condensate (lbs/hr)

Model	PMO (PSIG)	Pipe Size	Orifice Size	Differential Pressure (PSI)																		
				1/4	1/2	1	2	5	10	15	20	30	40	50	75	100	125	200	250	300		
FTE-20*	20	2"	.937"	6100	7800	9300	11800	15900	19500	22500	26000											
FTE-50	50	2"	2.125"	12800	16900	20100	25300	33000	40200	43500	46000	47800	50500	52500								
FTE-50	50	2 1/2"	2.125"	20400	25700	31000	37000	46300	55100	60300	65100	72000	77300	82100								
FTE-125	125	2 1/2"	2.125"	20400	25700	31000	37000	46300	55100	60300	65100	72000	77300	82100	90400	97700	105000					
FTE-200	200	1 1/2"	.375"	950	1350	1900	2200	2700	3300	3900	4400	5300	5800	6400	7600	8500	9400	11900				
FTE-200	200	2"	.75"	2700	4100	5700	7400	9900	11800	13400	14400	16400	18000	19000	21500	23000	24500	29200				
FTE-200	200	2 1/2"	1.5"	7200	12300	17400	21500	27600	32600	36000	39300	43100	46600	49200	54700	58800	61900	74000				
FTES-300	300	2 1/2"	1.5"	7200	12300	17400	21500	27600	32600	36000	39300	43100	46600	49200	54700	58800	61900	74000	86000	100550		

* Single seat orifice. All others are double seated.