

# SATURN-HV

## Medium Voltage Load Bank

### Description

The Saturn-HV is a self-contained load bank to 15KV utilizing the Simplex Saturn Load Module with on-board dry-type power transformer. It is a freestanding, skidded unit consisting of three principle sections:

1. High voltage section consisting of main input power terminals, high voltage: 480V 3-phase power transformer, low voltage output terminals, and outputs to load cell
2. 480V, low voltage resistive load section consisting of one 1500-3000KW forced-air cooled load cell
3. Control Section

All control circuits and control power supplies are powered internally. The Saturn-HV requires connection of a 3-phase feeder only.

Load circuits and cooling fan operate at 480V; control circuits operate at 120V.

Input disconnects, fuses, lightning arrestors and potheads available as options.

### Features

- Self-contained load and control system
- Utilizes the proven Simplex "Power-Web" load element (see page 2)
- Branch circuit fuse protection of load elements
- Digital load control (see page 4)
- Comprehensive malfunction detection system
- Color coded and numbered wiring; power wiring 150°C
- Plated bus bar


### Benefits

- Modular enclosure design with separate and isolated control and power sections
- Type 3R weatherproof power section, including load elements and cooling fan.



**Saturn-HV with optional Sound Attenuated Base**

- Type 3R weatherproof control section with generous cable connection space, thermally and electrically isolated from resistive load power section.
- Vertical airflow, exhausts hot air above level of personnel and away from buildings, pavement etc.
- Slide-out, tray mounted load elements
- Comprehensive overload, short circuit and malfunction protection
- Highly standardized, based upon extensive product line spanning from 5KW to 3MW
- Supported by comprehensive engineering and product support, including detail manuals, 24 hour field service, availability of start-up services.

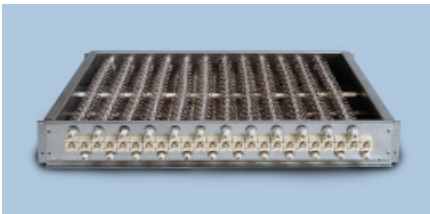

### Powr-Web Resistive Load Element

#### Description

Simplex Load Banks utilize “Powr-Web” load elements. The “Powr-Web” is an advanced design, air-cooled power resistor specifically designed for application to Load Bank systems. The “Powr-Web” is conservatively operated at half the maximum temperature rating of the alloy and features a short-circuit-safe design based on continuous mechanical support of the element by high temperature, ceramic clad stainless steel rods. The “Power Webs” are assembled into discrete trays which are assembled in a vertical “stack.” Each tray in the “stack” is independently serviceable without disturbing adjacent trays.

#### Specifications

- Alloy: FeCrAl
- Maximum continuous temperature rating: 1920°F
- Maximum operating temperature as applied in Load Bank: 1080° F
- Cool down time from operating to ambient temperature is 10 seconds.

#### Construction

- Ceramic clad, stainless steel through-rods.
- UL Recognized

Capacity:	1500KW, 1800KW, 2000KW, 2250KW, 2500KW, 3000KW; Resistive; 1.0 power factor
Voltage:	to 15KV AC, 3-phase (typical: 2400V, 3300V, 4160V, 13,200V, 13,800V) Load circuits operate at 480V via main power transformer
Frequency:	50 and 60 Hz
Load Steps:	50 KW resolution standard. 1-5-10-25KW resolution available.
Duty Cycle:	Continuous
Temperature:	125°F maximum ambient temperature Exhaust rise: $RISE = KW \times 3000 / CFM$ (note: as airflow is not laminar, exhaust air temperatures are not equal at all points at the plane of air exhaust. Some parcels of air may reach approximately 575°F before mixing)
Airflow:	1500-2000KW: 45,000 CFM, 2100-3000KW: 60,000 CFM
Fan/Control Power:	Internal, from load bus. Control circuits at 120V via transformer. The cooling fan operates at 3-phase line voltage. Load control circuits and fan motor control operate at 120V. Control circuits are fused. Control circuit fuses are 100,000 A.I.C., 600V rated. External, 480/240V, supply for humidity controller, when ordered.
Fault Rating	Fuses are rated 200KAIC. The load bank has a 5KAIC short circuit current rating.
Load Wire Insulation Rating	600V, 150°C
Control Wire Insulation Rating	600V, 105°C

## Principle Systems and Components

The load bank is a completely self-contained, freestanding unit which includes all resistive load elements, load control devices, load element branch circuit fuse protection, main load bus and terminals, cooling system, control power supply, unit controller and malfunction detection system and NEMA type enclosure.

## Load Elements

Simplex "Powr-Web" open wire, helically wound, chromium alloy, thermally derated to 60%. 5% tolerance, 2% balance, .995 p.f. UL Recognized.

## Load Control

Branch circuit contactors, each 50 KW step. Contactors have enclosed silver surfaced contacts, 120V coils; electrically operated and electrically held.

## Element Circuit Protection

Branch circuit fuses, each 50KW branch circuit, 70A, 200kAIC, current limiting type.

## Power Wiring

600V, 150°C insulation rating.

## Control Wiring

600V, 105°C insulation rating.

## Power Connection

Plated bus bar within an oversize terminal junction box.

## Cooling

Forced air, vertical airflow, top exhaust. 3-phase, TEFC motor driving cast aluminum fan blade. Circuit breaker combination motor starter.

## System Protection

Fan failure, high exhaust temperature, high intake temperature; lockout and alarm.

## Enclosure

Modular enclosure consists of three parts:

1. NEMA-3R rainproof power section including load elements and cooling fan
2. NEMA-3R control section, thermally and electrically isolated from power section
3. Exhaust hood. Mounts atop power section. Vertical flow with rain separators. Hood may be deleted and a duct flange provided for indoor applications where air is exhausted through a duct to the outdoors.

All panels for access to serviceable components are hinged doors with stainless steel hinges and lockable latches. All exterior fasteners are stainless steel.



The load bank enclosure is of double wall construction for cool exterior and thermal isolation of the load elements. Cooling airflow through the enclosure is vertical with cold air intake at the bottom and hot air exhaust out the top. Intake and exhaust openings are screened. Finish painted with a UL Listed process consisting of either a powder-coated finish or a liquid-coated finish consisting of an epoxy primer and a polyurethane finish.



**Saturn-HV with optional Sound Attenuated Base**



## Dimensions and Key Features

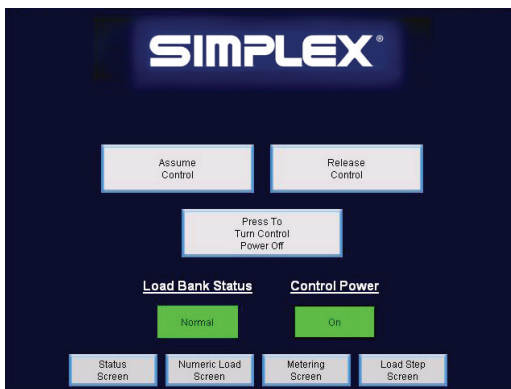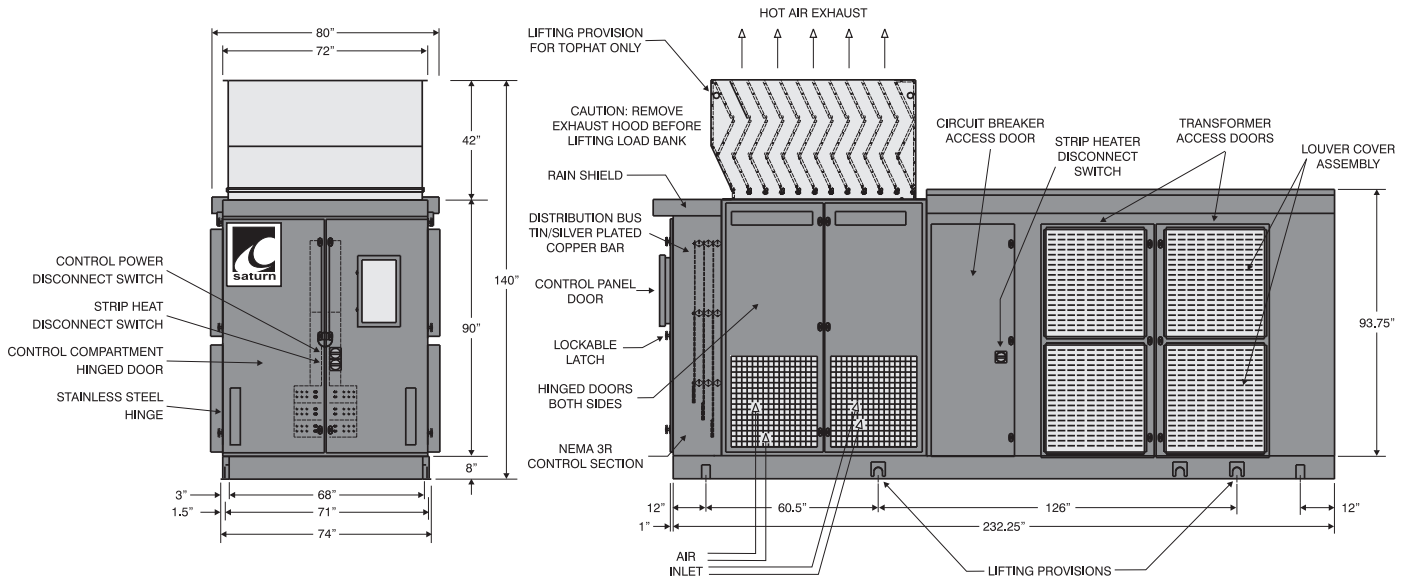

## D-Series, Digital Load Controller

With D-Series controllers, the user enjoys a significant savings of installation cost. Versus traditional analog (toggle switch) panels, connections for remote control are reduced to a single RS-485 or Ethernet Cat-5 cable. Multiple control stations are easily networked. Valuable space is conserved. Reliability is enhanced.

With D-Series controllers, data monitoring and acquisition, load bank automation and BMS integration are made simple. The D-Series is networked via MODBUS RTU over RS-485 or Ethernet allowing simple daisy chain or Ethernet switch cable networking. MODBUS-to-BacNet (or other protocol) converters are available.

The D-Series controller can be accessed by remote PC by simple assignment of an IP address.

PC integration software is available.

The D-Series accepts Simplex "Auto-Test" software enabling full automation of load bank testing with data acquisition, report generation and pass-fail testing. Inputs from generator controller data outputs can be accepted to allow integration of full engine data.

## Features

- Standard control system for Simplex Stationary Load Banks
- PLC based
- Color TFT touchpanel operator interface featuring bright colors, excellent contrast and wide viewing angle, perfect for bright sunlight and low light conditions
- Easy upgrades for load bank automation
- Network capable
- IP address capable
- PC integration software available
- MODBUS RTU over RS-485 or Ethernet network communications