

## Cast Iron Threaded Fittings

Class 125 (Standard)

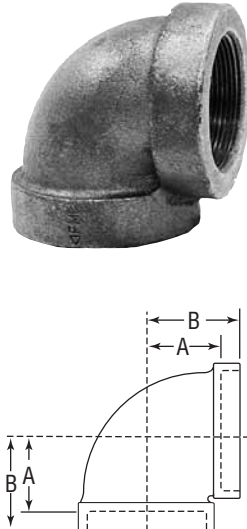
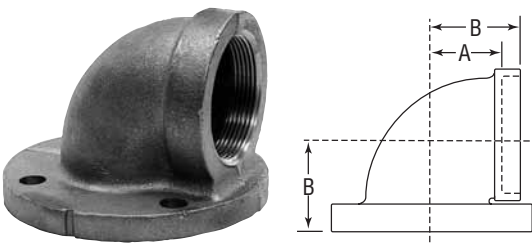
FIGURE 351 90° Elbow	Size		A		B		Unit Weight	
	NPS	DN	in	mm	in	mm	Black	
							lbs	kg
	1/4	8	1/2	13	13/16	22	0.16	0.07
	3/8	10	9/16	14	15/16	24	0.25	0.11
	1/2	15	11/16	17	1 1/8	29	0.40	0.18
	3/4	20	13/16	22	1 15/16	33	0.60	0.27
	1	25	15/16	24	1 1/2	38	0.92	0.42
	1 1/4	32	1 1/8	29	1 3/4	44	1.44	0.65
	1 1/2	40	1 5/16	33	1 15/16	49	1.95	0.88
	2	50	1 9/16	40	2 1/4	57	3.13	1.42
	2 1/2	65	1 13/16	47	2 11/16	68	4.94	2.24
	3	80	2 3/16	56	3 1/8	79	7.21	3.27
	3 1/2	90	2 7/16	62	3 7/16	87	9.67	4.39
	4	100	2 11/16	68	3 13/16	98	12.17	5.52
	5	125	3 5/16	84	4 1/2	114	21.46	9.73
	6	150	3 7/8	98	5 1/8	130	31.33	14.21
	8	200	5 3/16	132	6 9/16	167	64.56	29.28

FIGURE 371 90° Elbow, Flange & Screw	Size		A		B		Unit Weight	
	NPS	DN	in	mm	in	mm	Black	
							lbs	kg
	2 1/2	65	1 13/16	47	2 11/16	68	10.22	4.63
	3	80	2 3/16	56	3 1/8	79	13.25	6.01
	4	100	2 11/16	68	3 13/16	98	21.56	9.78
	6	150	3 7/8	98	5 1/8	130	40.50	18.37

tNominal Pipe Sizes of 4" (100 DN) and larger have two holes tapped for stud or tap bolts.

Note: See page 36 for pressure-temperature ratings.