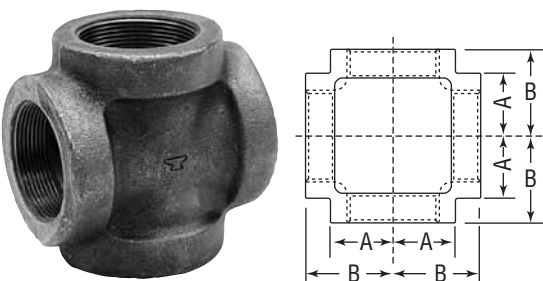
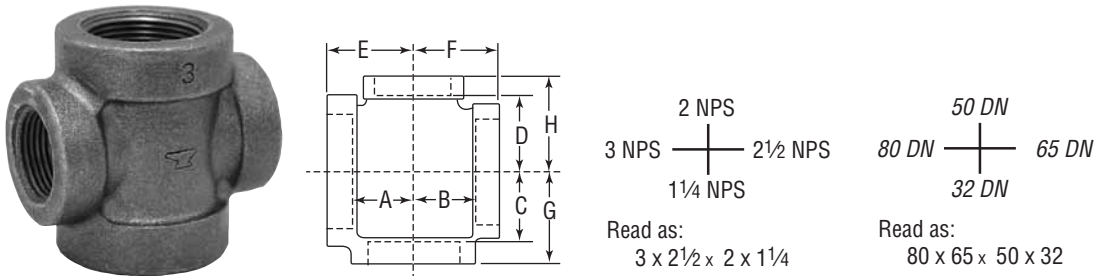


## Cast Iron Threaded Fittings

Class 125 (Standard)

<b>FIGURE 360</b> Cross 	Size		A		B		Unit Weight	
	NPS	DN	in	mm	in	mm	lbs	kg
							Black	
	1/2	15	9/16	14	13/16	22	2.80	1.27
	3/4	20	13/16	22	15/16	33	1.03	0.47
	1	25	15/16	24	1 1/2	38	1.59	0.72
	1 1/4	32	1 1/8	29	1 3/4	44	2.42	1.10
	1 1/2	40	1 5/16	33	1 15/16	49	3.21	1.46
	2	50	1 9/16	40	2 1/4	57	5.28	2.39
	2 1/2	65	1 13/16	47	2 11/16	68	8.07	3.66
	3	80	2 3/16	56	3 1/8	79	11.84	5.37
	4	100	2 3/4	70	3 13/16	98	19.63	8.90
	6	150	3 7/8	98	5 1/8	130	47.67	21.62

<b>FIGURE 361</b> Cross Reducing 	Size		A		B		C		D		E, F		G, H		Unit Weight						
	NPS	DN	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg			
1	25	1	25	3/4	20	3/4	20	13/16	22	13/16	22	15/16	24	15/16	24	1 3/8	35	1 7/16	37	1.30	0.59
1 1/4	32	1 1/4	32	1	25	1	25	15/16	24	15/16	24	1 1/8	29	1 1/8	29	1 9/16	40	1 11/16	43	2.04	0.93
1 1/2	40	1 1/4	32	1	25	1	25	1	25	1 1/8	29	1 1/4	32	1 1/4	32	1 5/8	41	1 13/16	47	2.74	1.24
				1	25	1	25	1	25	1 1/4	32	1 1/4	32	1 5/8	41	1 13/16	47	2.67	1.21		
		1 1/2	40	1	25	1	25	1	25	1 1/4	32	1 1/4	32	1 5/8	41	1 13/16	47	2.51	1.14		
				1 1/4	32	1	25	1 1/8	29	1 1/8	29	1 3/8	35	1 3/8	35	1 13/16	47	1 7/8	48	3.90	1.77
2	50	1 1/2	40	1	25	1	25	1 1/16	17	1 1/8	29	1 7/16	37	1 7/16	37	1 3/4	44	2	51	3.57	1.62
				1 1/4	32	1	25	1 1/8	29	1 3/16	22	1 3/16	22	1 1/2	38	1 7/8	48	2 1/16	52	4.18	1.90
		2	50	1	25	1	25	1 1/16	17	1 1/16	17	1 7/16	37	1 7/16	37	1 3/4	44	2	51	3.22	1.46
				1 1/4	32	1 1/4	32	1 1/8	29	1 1/8	29	1 7/16	37	1 7/16	37	1 7/8	48	2 1/8	54	4.00	1.81
2 1/2	65	2	50	1 1/2	40	1 1/2	40	1 1/4	32	1 1/4	32	1 7/16	37	1 7/16	37	2	51	2 1/8	54	4.08	1.85
				1	25	1	25	1	25	1 1/16	17	1 13/16	47	1 13/16	47	1 15/16	49	2 5/16	59	5.11	2.32
		2 1/2	65	1 1/2	40	1 1/2	40	1 1/4	32	1 5/16	24	1 7/8	48	1 7/8	48	2 3/16	56	2 7/16	62	6.13	2.78
				2	50	2	50	1 1/2	38	1 3/4	44	1 7/8	48	1 7/8	48	2 7/16	62	2 9/16	65	7.23	3.28
3	80	1 1/4	32	1	25	1 3/16	22	1 3/16	22	1 3/4	44	1 13/16	47	2 1/16	52	2 3/8	60	5.39	2.44		
				1 1/4	32	1 1/8	29	1 1/8	29	1 13/16	47	1 13/16	47	2 1/16	52	2 3/8	60	5.26	2.39		
		2	50	1 1/2	40	1 1/2	40	1 1/4	32	1 1/4	32	1 7/8	48	1 7/8	48	2 3/16	56	2 7/16	62	5.68	2.58
				2	50	2	50	1 9/16	40	1 9/16	40	1 15/16	49	1 15/16	49	2 7/16	62	2 9/16	65	6.82	3.09
4	100	1 1/2	40	1 1/2	40	1 3/8	35	1 3/8	35	2 3/16	56	2 3/16	56	2 5/16	59	2 13/16	73	7.91	3.59		
		2	50	2	50	1 5/8	41	1 5/8	41	2 3/16	56	2 3/16	56	2 9/16	65	2 15/16	75	8.85	4.01		
4	100	2	50	2	50	2	50	2	50	2 11/16	68	2 11/16	68	2 3/4	70	3 7/16	87	12.00	5.44		

Note: See page 36 for pressure-temperature ratings.