


# COMMERCIAL PRODUCTS CATALOG

## Hydronic Heating Specialties

### FFB (35-6A3/6H3) SERIES

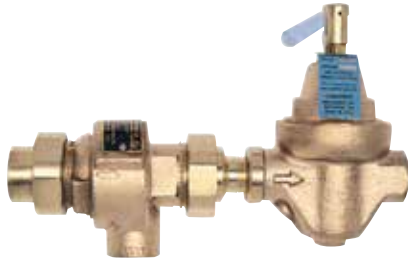

### BRONZE COMBINATION CPBP BACKFLOW PREVENTER & FEED WATER REGULATORS

Positive protection against backflow when supply pressure falls below system pressure.

#### FEATURES

- Designed for continuous pressure, hot or cold water service
- Fast-fill lever on regulator
- Built-in Stainless Steel strainer
- Max supply pressure 100 psig
- Max temperature 210°F
- Backflow device is ASSE and CSA listed
- APOLLOXPRESS™ end connection option

Series Number	Size (in.)	Height (in.)	Length (in.)	Net Wt. (lbs.)
35-6A3-BF	1/2 Union NPT x NPT	5.25	8.50	4.5
35-6H3-BF	1/2 Solder Union x NPT	5.25	8.50	4.4
35-6A3-BFC*	1/2 Union NPT	5.25	8.50	4.5
35-6H3-BFC*	1/2 Solder Union	5.25	8.50	4.4

\* "C" Models for Canadian market - Discharge port not threaded.

### FCT (35-403) SERIES



### MULTI-ORIFICE CONTROL VALVE

Provides flow control on tankless heaters; for delivery of 2-1/2, 3, 3-1/2, and 4 GPM. Easy adjustment.

#### FEATURES

- Maximum temperature: 250°F
- Maximum pressure: 150 psig

Series Number	Size (in.)	Height (in.)	Length (in.)	Net Wt. (lbs.)
35-403-01	1/2 Solder	2.11	2.00	.42

### FC (35FC) SERIES



### ALL BRONZE HYDRONIC FLOW CHECK VALVES

The flow check is designed to provide positive shut-off when water service is interrupted.

#### FEATURES

- Wear resistant metal to metal seat
- Replaceable seat assembly
- By-pass option (NPT only)
- Sweat or thread connection available
- Designed for easy maintenance
- Suitable for hot or cold water service
- Maximum working pressure: 50 psi for 3/4" - 1-1/4"  
125 psig for 1-1/2" - 2"
- Maximum operating temperature: 250°F

Series Number	Size (in.)	Connection	Net Wt. (lbs.)
35-FC4-01	3/4	NPT	2.3
35-FC5-01	1	NPT	2.6
35-FC6-01	1-1/4	NPT	5.0
35-FC7-01	1-1/2	NPT	8.6
35-FC8-01	2	NPT	12.2
35-FC4-02	3/4	Sweat	11.2
35-FC5-02	1	Sweat	15.5