

Fig. 259

Pipe Saddle Support with U-Bolt

Size Range: 4" through 36" pipe

Material: Cast iron stanchion saddle with steel yoke and nuts. 14" through 36" carbon steel saddle with steel yoke. 4" through 12" steel saddle available on special request.

Finish: Plain or Galvanized

Service: Stanchion type support with additional stability provided by U-bolt attachment to pipe.

Approvals: Complies with Federal Specification A-A-1192A (Type 37), ANSI/MSS SP-69 and MSS SP-58 (Type 37).

Installation: Same as pipe saddle support Fig. 258, except that yoke is attached to saddle after pipe is in place.

Features: U-bolt yoke provides stability.

Ordering: Specify pipe size to be supported, figure number, name, material and finish.

Order Separately: Figure 63P Square Cut End Stanchion. Specify "H" and pipe size to be supported by Figure 259.



Fig. 259
Cast Iron



Fig. 259
Fabricated Steel

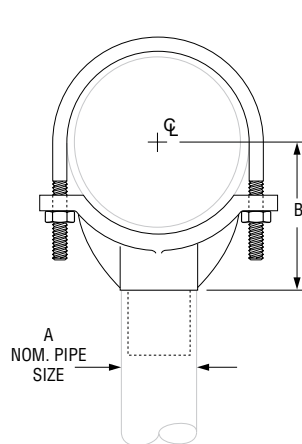


Fig. 259
Cast Iron

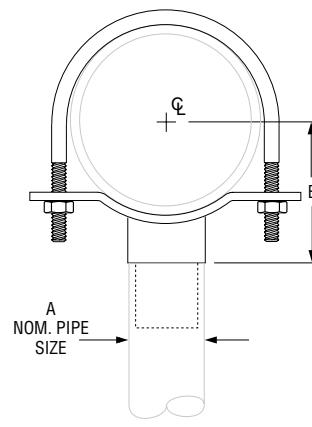



Fig. 259
Fabricated Steel

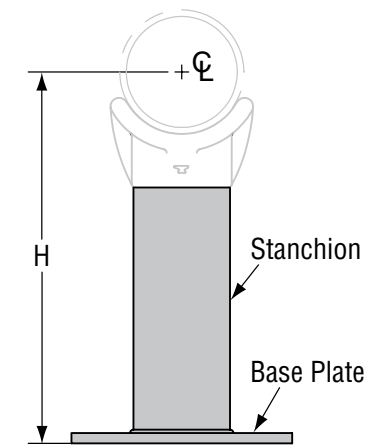


Fig. 63, Type P

Square Cut End for use with Figure 258 or 259 Pipe Saddle Support

FIG. 259: WEIGHTS (LBS) • DIMENSIONS (IN)

Pipe Size	Weight	A	B	Width C	Max Load
4	10.8	3	4 ³ / ₁₆	3 ⁵ / ₈	3,800
5	12.1		4 ¹³ / ₁₆		
6	12.7		5 ¹ / ₁₆		
8	21.3		6 ¹⁵ / ₁₆		
10	25.7		8 ⁷ / ₁₆		
12	31.2		9 ¹⁵ / ₁₆		
14	28.0	4	10 ¹ / ₂	6	5,300
16	31.0		11 ¹ / ₂		
18	40.0		13 ¹ / ₂	6	7,300
20	43.0		14 ¹ / ₂		
22	46.0		15 ¹ / ₂		
24	52.0		17 ¹ / ₂		
26	55.0		18 ¹ / ₂		
30	69.0		20 ³ / ₈		
32	73.0		21 ¹ / ₈		
36	81.0		23 ³ / ₈		

* Standard Wall Pipe

The above load ratings are applicable to the saddle only and are not applicable to the stanchion or other means used to support the saddle.