


20-300 SERIES

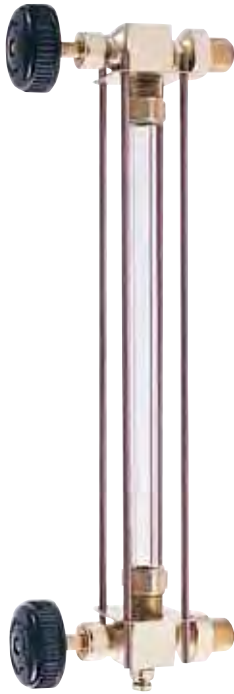

STANDARD PATTERN BRASS WATER GAUGES

Available with 1/2" or 3/4" NPT male pipe connections. Four guard rods and EPDM gauge glass gaskets standard. Other glass gaskets available. Automatic ball checks help prevent the loss of fluids should the glass break.

FEATURES

- Standard 1/4" needle drain valve in lower body
- Pet cock or Apollo® ball valve drain option
- Polished finish on 25-400 and 25-500
- Ball checks standard on 20-350 and 25-500
- Rated: 200 psig @ 400°F, 400 psig @ 100°F
- CRN OF6616.5C
- TFE reinforced stem packing

Part Number	Pipe Size (in.)	Glass O.D. & Length	Wt./100 (lbs.)	Wheel Type
20-304	1/2	5/8 x 12	260	ALUMINUM
20-305	1/2	5/8 x 12	270	COMPOSITION
20-307	3/4	3/4 x 16	345	ALUMINUM
20-308	3/4	3/4 x 16	365	COMPOSITION
20-350*	1/2	5/8 x 12	265	ALUMINUM
20-351*	1/2	5/8 x 12	265	COMPOSITION
20-353*	3/4	3/4 x 16	360	ALUMINUM
20-354*	3/4	3/4 x 16	365	COMPOSITION
25-404	1/2	5/8 x 12	285	ALUMINUM
25-405	1/2	5/8 x 12	285	COMPOSITION
25-407	3/4	3/4 x 16	350	ALUMINUM
25-408	3/4	3/4 x 16	350	COMPOSITION
25-501*	1/2	5/8 x 12	290	ALUMINUM
25-502*	1/2	5/8 x 12	290	COMPOSITION
25-504*	3/4	3/4 x 16	355	ALUMINUM
25-505*	3/4	3/4 x 16	355	COMPOSITION

Note: Service ratings are subject to pressure/temperature ratings of gauge glass and glass gaskets.

* Automatic ball checks

Suffix Key - Applicable for all Water Gauges

SUFFIX KEY

- 00 Standard set includes top & bottom valves, glass and rods
- 01 Top valve only
- 02 Bottom valve only
- 03 Top & Bottom valves only (no glass or rods)
- 10 For special gauges with non-standard glass, rods, and/or gaskets.