

# BALL VALVES

## Mini Ball Valves

### 94 MBV SERIES




### MINI BALL VALVE – APOLLO INTERNATIONAL™

Designed for commercial and light industrial use. Conventional port, constructed of heavy-duty forged brass, PTFE seats and gland follower with double viton o-rings, to prevent stem leakage.

#### FEATURES

- Reversible handle
- Blowout-proof stem
- Double viton o-rings
- Large raised wrench flats
- Chrome plated brass ball
- Maximum 600 psig at 100°F, non-shock
- Temps from -40°F to 300°F
- CSA/ANSI Z21.15 (1/2 psig), CGA9.1 approved
- ASME B16.44 (2 and 5 psig) approved
- MSS-SP110 compliant

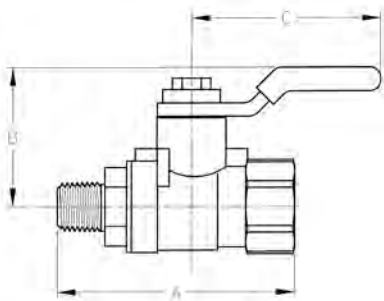

Model Number	Size (in.)	Dimensions (in.)			Port Ø	Wt. (lbs.)
		A	B	C		
94MBV01	1/4 FNPT x 1/8 MNPT	1.96	1.25	1.67	0.31	0.19
94MBV02	1/4 FNPT x 1/4 MNPT	2.04	1.15	1.67	0.31	0.20
94MBV03	1/4 FNPT x 1/4 FNPT	1.63	1.28	1.67	0.31	0.17
94MBV04	1/8 FNPT x 1/8 MNPT	1.97	1.20	1.67	0.31	0.16
94MBV05	1/8 FNPT x 1/8 FNPT	1.61	1.23	1.67	0.31	0.16

## Stop & Waste Ball Valves

### 95ALF SERIES




### FULL-PORT BRASS BALL VALVE

The Apollo® International 95ALF Lead Free forged brass ball valves combine reliable operation with maximum economy. Ideal for plumbing or hydronic systems where draining is required. Valves are certified by IAPMO and listed to AB-1953.


#### FEATURES

- Lead Free materials and certification
- Blow-out proof stem design
- Adjustable stem packing nut
- Additional O-ring stem seal
- Drain port with finger tight shut-off
- Fast, quarter-turn operation
- Valve Design Rating: 600 CWP
- Temperature Range: -20°F to 300°F
- IAPMO / ANSI listed to AB 1953, 0.25% Lead Max
- NSF 61-8

NPT x NPT

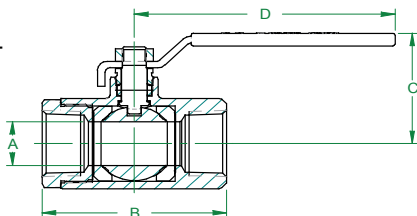

Solder x Solder

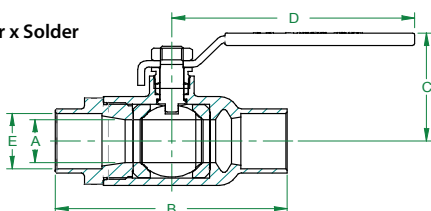

LF Model Number	Size (in.)	Dimensions (in.)				
		A	B	C	D	E
<b>NPT</b>						
95ALF-103-01	1/2	0.59	2.24	1.78	3.74	-
95ALF-104-01	3/4	0.79	2.53	2.09	3.94	-
95ALF-105-01	1	0.98	3.15	2.36	4.33	-
<b>Solder</b>						
95ALF-203-01	1/2	0.59	2.12	1.78	3.74	0.63
95ALF-204-01	3/4	0.79	2.87	1.94	3.94	0.88
95ALF-205-01	1	0.98	3.53	2.36	4.33	1.13



For additional information, submittal sheets and manuals, visit [www.apollovalves.com](http://www.apollovalves.com)

Customer Service (704) 841-6000