


GRUVLOK® COUPLINGS FOR GROOVED-END PIPE

Gruvlok couplings for grooved-end pipe are available in nominal pipe sizes 1" thru 30" and metric sizes. The variety of coupling designs provide a universal means for the connection of pipe, fittings and pipe system components. The wide assortment of Gruvlok couplings and gaskets permit selection of the most suitable combination for a specific application, thus providing the most versatile and economical pipe system installation.

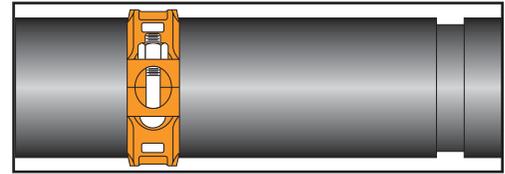

MATERIAL SPECIFICATIONS

ANSI BOLTS & HEAVY HEX NUTS:

Heat treated, oval neck track head bolts conforming to ASTM A 183 Grade 2 with a minimum tensile strength of 110,000 psi and heavy hex nuts of carbon steel conforming to ASTM A 563 Grade A or Grade B, or J995 Grade 2. Bolts and nuts are provided zinc electroplated as standard.

METRIC BOLTS & HEAVY HEX NUTS:

Heat treated, zinc electroplated oval-neck track head bolts made of carbon steel with mechanical properties per ISO 898-1 Class 8.8. Hex nuts are zinc electroplated followed by a yellow chromate dip.

STAINLESS STEEL BOLTS & NUTS:

Stainless steel bolts and nuts are available for the Fig. 7001, 7401, 7401-2, 7001-2, 7004, 7000 and 7400 couplings in standard 304SS, (316SS available as special order)

HOUSING:

Ductile Iron conforming to ASTM A 536, Grade 65-45-12

COATINGS:

Rust inhibiting paint Color: ORANGE (standard)
Hot Dipped Zinc Galvanized (optional)
Other Colors Available (IE: RAL3000 and RAL9000)
For other Coating requirements contact an Anvil Representative.

GASKETS: Materials

Properties as designated in accordance with ASTM D 2000

GRADE "EP" EPDM (Green/Red color code) NSF-61 Certified

-40°F to 250°F (Service Temperature Range)(-40°C to 121°C)
Recommended for water service, diluted acids, alkalies solutions, oil-free air and many other chemical services.
NOT FOR USE IN PETROLEUM APPLICATIONS.

GRADE "E" EPDM (Green color code) NSF-61 Certified

-40°F to 230°F (Service Temperature Range)(-40°C to 110°C)
Recommended for water service, diluted acids, alkalies solutions, oil-free air and many chemical services.
NOT FOR USE IN PETROLEUM APPLICATIONS.

Grade "T" Nitrile (Orange color code)

-20°F to 180°F (Service Temperature Range)(-29°C to 82°C)
Recommended for petroleum applications. Air with oil vapors and vegetable and mineral oils.
NOT FOR USE IN HOT WATER OR HOT AIR

Grade "O" Fluoro-Elastomer (Blue color code)

Size Range: 1" - 12" (C style only)
20°F to 300°F (Service Temperature Range)(-29°C to 149°C)
Recommended for high temperature resistance to oxidizing acids, petroleum oils, hydraulic fluids, halogenated hydrocarbons and lubricants

Grade "L" Silicone (Red color code)

Size Range: 1" - 12" (C style only)
-40°F to 350°F (Service Temperature Range)(-40°C to 177°C)
Recommended for dry, hot air and some high temperature chemical services

GASKET TYPE:

Standard C Style
Flush Gap: 1" - 24"
End Guard: 1" - 12" (Fig. 7004 and 7377)
SlideLOK: 2" - 8"

LUBRICATION:

Standard Gruvlok
Gruvlok Xtreme™ (Do Not use with Grade "L")

WORKING PRESSURE, END LOAD, PIPE END SEPARATION & DEFLECTION FROM CENTER LINE:

Based on standard wall steel pipe with cut or roll grooves in accordance with Gruvlok specifications. See technical data section for design factors.

COUPLING DATA CHART NOTES

COUPLING DATA CHART NOTES														
Nominal Size	O.D.	Max. Work. Pressure	Max. End Load	Range of Pipe End Separation	Deflection from \bar{C}		Coupling Dimensions			Coupling Bolts		Specified Torque		Approx. Wt. Ea.
					Per Coupling	of Pipe	X	Y	Z	Qty.	Size	Min.	Max.	
In./DN(mm)	In./mm	PSI/bar	Lbs./kN	In./mm	Degrees(°)-Minutes(')	In./ft-mm/m	In./mm	In./mm	In./mm		In./mm	Ft.-Lbs/N-m		Lbs./kg
1	2	3	4	5	6		7			8		9		10

- 1** Gruvlok Couplings are identified by either the nominal ANSI pipe size in inches or pipe O.D. in millimeters (see column 2).
- 2** Nominal Outside Diameter of Pipe.
- 3** Maximum line pressure, including surge, to which a joint can be subjected. Working pressure ratings are based on standard wall steel pipe with standard cut or roll grooves in accordance with Gruvlok specifications. For Performance Data on other than standard wall pipe, refer to Technical data section. **NOTE: For one time field test only the maximum joint working pressure may be increased to 1.5 times the figure shown.**
- 4** Maximum end load from all interior and/or exterior forces to which the joint can be subjected are based on standard wall steel pipe with standard cut or roll grooves in accordance with Gruvlok specifications.
- 5** Range of pipe end separation for roll grooved pipe, Double values shown when using cut groove pipe; see page 204 for details.
- 6** Maximum allowable angular deflection values from centerline when using standard roll grooved pipe; Double values shown when using cut groove pipe; see page 204 for details.
- 7** “X”, “Y”, and “Z” are external dimensions for reference purposes only.
- 8** The quantity of bolts per coupling.
- 9** Nuts must be tightened alternating and evenly to the specified bolt torque. See individual product installation instructions for additional important information.
- 10** Approximate weight for a fully assembled coupling with gasket, bolts, and nuts.

Introduction
 Couplings
 Outlets
 Fittings
 Valves & Accessories
 High Pressure
 CTS Copper System
 Di-Electric Nipples
 Plain-End Fittings
 HDPE Couplings
 Sock-It® Fittings
 Stainless Steel Method
 Roll Groovers
 Installation & Assembly
 Special Coatings
 Design Services
 Technical Data
 Master Format 3 Part Specs.
 Pictorial Index