

EXPLORE™ 4-LEG SERIES

SCALE-UP ACTIVE LEARNING TABLES

SCALE-UP

Designed to create highly collaborative and interactive learning environments for large enrollment courses.



Made In The USA



CarbonNeutral.com



SCALE-UP tables are available with Fluid Up power.



FEATURES

- SCALE-UP tables (*Student Centered Active Learning Environment for Undergraduate Programs*) group together to create learning pods of nine students each and can separate for smaller group work of three students. Tables without power do not include a cord bin and can seat four students when used individually.
- SCALE-UP tables EDUSDPSU3 and EDUSDPSU3C are used with the Fluid Up Power System that provides power above the work surface for easy to access by mobile devices. Power units include two power outlets and two USB power outlets and is designed for stand alone use or to daisy chain multiple tables from a single outlet.
- Fluid Up power units are included with the table, power unit version must be specified at the time of order. Power In-Feed and Jumper cables for daisy chain power units are sold separately.
- Tables are available with 2.5" twin wheel casters, all with a locking brake, or with leveling glides for stationary configurations.
- Work surface is height adjustable from 22" to 32" in height in 1" increments on tables with casters. Tables with glides are height adjustable from 20" to 30".
- Unique flat oval tube steel base has telescoping legs for height adjustment and is constructed from 14-gauge steel.
- Base model features a 1", 45 lb. density, MDF substrate with laminated top and standard thermoplastic elastomer (TPE) t-mold edge band that is attached along the entire perimeter of the work surface. Premium finish models feature a 1", 45 lb. density MDF substrate with .03" HPL laminate top and .03" backer and a TPE t-mold edge.
- Work surface includes metal threaded inserts to mount the leg assemblies for a metal to metal connection that adds strength and greatly reduces the possibility screws will strip or fall out over time.
- Meets or exceeds ANSI BIFMA x5.5-2008 standards for tables and proudly made in the U.S.A. using union labor.

STANDARD FINISH OPTIONS

Work surface is available in Grey Mist laminate with matching Quartz trim or Natural Maple laminate with Aluminum trim. Powder paint steel bases are Aluminum and toe kicks are always Anthracite. Fluid Up power unit, when included, is always the stand alone DPAUSB9-P.



-ALGM
Grey Mist top and Aluminum base



-ALMP
Natural Maple top and Aluminum base

PREMIUM FINISH OPTIONS

EDU 2.0 products are available to order in any paint, trim and laminate offered by Bretford. Work surfaces may be specified with a 3mm thermoplastic (TPE) t-mold edge. To order product ordered in premium finish specify paint, laminate, edge detail, trim color. Fluid Up power unit may be daisy chain or stand alone and is chosen by specifying the model at time of order.

Example (table shown on first page):

EDUSDPSU3C⁽¹⁾-SW⁽²⁾-CHW⁽³⁾-01⁽⁴⁾-SW⁽⁵⁾-DPAUSB-P⁽⁶⁾

⁽¹⁾ = Base Model Number

⁽²⁾ = Sail White Paint

⁽³⁾ = Chocolate Warp Laminate

⁽⁴⁾ = 3mm Thermoplastic Elastomer (TPE) T-Mold Edge

⁽⁵⁾ = Sail White Edge Finish

⁽⁶⁾ = Fluid Up Daisy Chain Power Unit with USB Power

ELECTRICAL ACCESSORIES

EDU 2.0 4-Leg SCALE-UP Tables with Fluid Up power include the power unit with the table, Power in-feed cables and jumper cables are sold separately. *Models EDUSDPSU3 and EDUSDPSU3C only.*

Daisy Chain Fluid Up Power System - 2-outlet power with USB power in a pop up door to provide power above the table top. Power units daisy chain a pod of three tables from a single outlet. Fluid Up uses a power in-feed and 42" L jumper cables to power from a single 15 amp circuit. UL Recognized system features 12 amp overload protection.

DPAUSB-P - 2-outlet pop up unit with USB power *included*

DPP120 - Power in-feed cable with overload sensor

DPJ42 - 42" L jumper cable

Stand Alone Fluid Up Power System - 2-outlet power with USB power in a pop up door to provide power above the table top. UL Listed system features 9-foot power cord and 3-prong plug.

DPAUSB9-P - 2-outlet pop up unit with USB power *included*

TABLE ACCESSORIES

EDUHMC Snap On Cord Minder Clip - Steel leg EDU 2.0 tables support the use of the snap on cord management clip that holds cords to the table leg from the cord bin to the floor.



SHIPPING INFORMATION & UPC CODES

Tables with Glides:

EDUSSU3-_: 101 lbs.

EDUSDPSU3-_: 116 lbs.

Tables with Casters:

EDUSSU3C-_: 104 lbs.

EDUSDPSU3C-_: 119 lbs.

All tables ship ready to assemble in one carton pack.

SKU	ALGM	ALMP
EDUSSU3-	0 96633 35545 7	0 96633 35546 4
EDUSSU3C-	0 96633 35547 1	0 96633 35548 8
EDUSDPSU3-	0 96633 35541 9	0 96633 35542 6
EDUSDPSU3C-	0 96633 35543 3	0 96633 35544 0

DIMENSIONS

Tables with Glides:

EDUSSU3-_: 61^{3/4}"w x 32^{1/2}"d x 20"-30"h

EDUSDPSU3-_: 61^{3/4}"w x 32^{1/2}"d x 20"-30"h

Tables with Casters:

EDUSSU3C-_: 61^{3/4}"w x 32^{1/2}"d x 22"-32"h

EDUSDPSU3C-_: 61^{3/4}"w x 32^{1/2}"d x 22"-32"h

Cord Bin/Modesty: 30"w x 4^{1/2}"d x 5"h

Fluid Up Power Cut Out: 8"w x 4"d

Individual Table Dimensions:

A - 61^{3/4}"

B - 32^{1/2}"

C - 28^{1/2}"

D - 29"

E - 17^{3/4}"

F - 32^{1/2}"

Configured Table Group Dimensions:

Y - 85^{1/2}"


Z - 79^{1/2}"

Distance Between Legs:

C - 20^{3/4}"

D - 23^{1/2}"

F - 41"

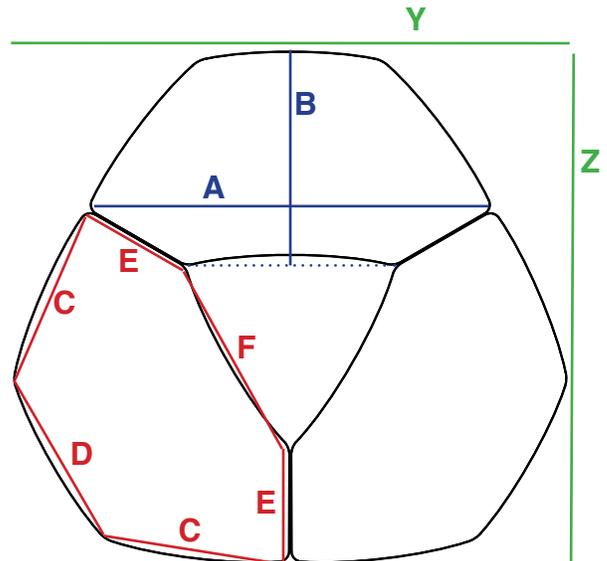

ENVIRONMENTAL & SAFETY SPECIFICATIONS

EDGE TRIM OPTIONS

Standard edge T-mold trim is constructed from thermoplastic elastomer (TPE) which, unlike PVC, is non-toxic, generates low pollution during manufacturing, is additive and phthalate free, and is recyclable at the end of the product life cycle or will break down in a landfill.

POWDER COAT PAINT

All steel components are finished using a powder coat paint that greatly reduces VOCs while providing superior durability.

RECYCLED CONTENT

The work surface uses a MDF substrate that contains an average of 70% recycled content. Steel components are constructed with prime steel and feature a 25% to 35% post-consumer recycled content. Steel components are 100% recyclable at the end of the product life cycle.

ANSI-BIFMA TESTED

Tables are tested to and meet or exceed the ANSI-BIFMA x5.5-2008 standards for tables.

FOUR LOCKING CASTERS

Mobile EDU2.0 tables feature all four casters with locking brakes for stable configurations.

CARBON NEUTRAL

Bretford has achieved CarbonNeutral[®] company certification by reducing carbon footprint to net zero in accordance with the CarbonNeutral protocol. The EDU 2.0 line of EXPLORE tables have achieved Carbon-Neutral product certification.

GREENGUARD GOLD CERTIFIED

EXPLORE tables are certified to Underwriter Laboratories GREENGUARD GOLD air quality standards. GREENGUARD GOLD is referenced by both the Collaborative for High Performance Schools (CHPS) and the Leadership in Energy and Environmental Design (LEED) Building Rating System.

CONSTRUCTION SPECIFICATIONS

BASE

Upper and lower leg assemblies are constructed with 14-gauge flat oval tubing, which is formed using a CNC tube bender, and features arc welded connections to the mounting plate with two 3/16" gussets added for strength and support. The upper leg assembly mounts to the underside of the work surface with seven screws through a 3/16" thick steel plate. Each leg screw threads into metal inserts in the underside of the work surface for a strong fit. The lower leg assembly telescopes inside the upper assembly, allowing for height adjustability from 20" to 30" on tables with glides and 22" to 32" on tables with casters. Legs adjust in 1" increments. The lower leg is available with the choice of 2.5" diameter twin wheel casters, all with locking brakes, or with 1" adjustable leveling glides.

WORK SURFACE

Work surfaces on base models feature a 1" thick, 45 lb. density melamine top and premium finish models feature a 1" thick, 45 lb. density core with .03" high-pressure laminate top and .03" backer. Tables designed for use with the Fluid Up Power System feature a center rear cut out that is 8"W x 4"D with 1/8" corner radii. Fluid Up power units are included, daisy chain jumper cables and power in-feed cables are sold separately. Tables are designed to individually seat three adults, tables without Fluid Up Power may seat up to four adults. When configured tables seat a group of nine adults. All models come with a 3mm TPE t-mold. The underside of the work surface includes 28 metal inserts that align with the leg mounting plates.

CORD MANAGEMENT

Tables designed for Fluid Up power include a cord management raceway constructed from 18-gauge steel. The 31"L bin is mounted to the back edge of the table under the power cut out. The raceway is open at both ends to allow cables to run from one table to the next when used in the SCALE-UP circle configuration. Access to power and cord management is available from the underside of the work surface through a 12"W x 4"H cut out centered on the inside panel.

WARRANTY

Bretford warranties EDU2.0 Explore Series Tables for 12-years, at date of shipment, against defects from materials or workmanship. Electrical and data components, gas shocks, and fabric feature a 1-year warranty.

MADE IN THE USA

EDU2.0 tables are made at Bretford's Chicago area manufacturing facility, employing union labor.



BRETFORD[®]

11000 SEYMOUR AVENUE
FRANKLIN PARK, ILLINOIS 660131 USA
TOLL FREE PHONE 800-521-9614
PHONE 847-678-2545
TOLL FREE FAX 800-343-1779
FAX 847-678-0852
WWW.BRETFORD.COM