



The IBL is the ideal projector lift for the cost-conscious customer, or when ceiling space is limited.

- Lowering distance - 39"
- Weight capacity - 35 lbs.
- Two popular closure configurations:
 - Drywall ceiling with 16" on-center floor joists
 - Ceiling Tile: 2' x 2'
- Three positions: stowed, show, and service
- Integrated plenum housing and closure system
- Position repeatable to better than 1/16"
- Cable management system
- Lift mounts to joists or structural ceiling
- Whisper-quiet operation
- Includes wired hand-held remote
- Options: IR and RF control, cable pre-wire package

FEATURES & BENEFITS

DRAWINGS & SPECIFICATIONS

- Contact closure operation
- Safety belt for earthquake standards
- Plenum housing adjusts to accommodate projectors with vertical height of 4" to 11"
- Power requirements: 110V, 0.6 amp
- Digital electronics with self diagnostics
- Programmable show and service positions
- Requires Display Devices projector mount adapter
- Universal mount included
- Pre-packaged / IN STOCK
- Shipping weight: 70 lbs.
- 1 year warranty

Model	Form factor	Max. Projector Size
IBL-1522	16" OC joists	12.5"w x 18.5"l x 11"h
IBL-2424	2' x 2'	19.0"w x 19.0"l x 11"h


Dimensions and specifications subject to change.

14.68"w x 21.80"d x 9.50" - 16.00"h (adjustable)

(Not Including Projector)

IBL-1522 60 lbs. IBL-2424 66 lbs.

(Plenum covers adjusted to minimum height)

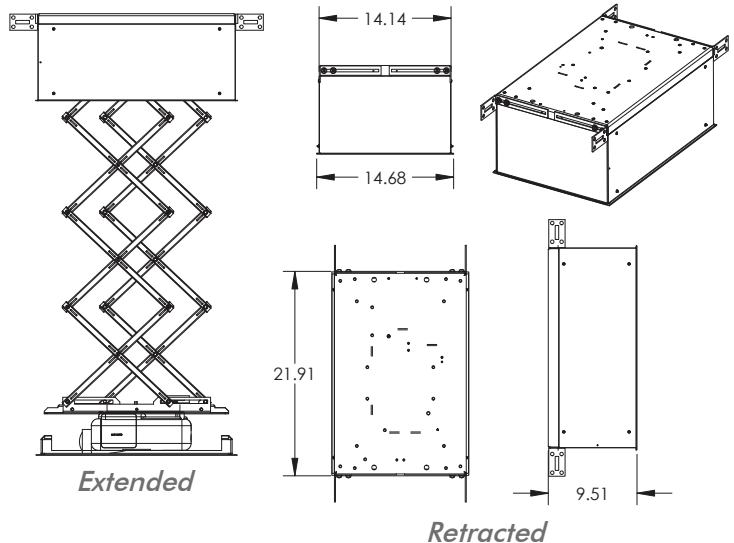

Metric conversion: inches x 25.4