

## iVision 30sx+ XL

3,900 ANSI Lumens | Contrast Ratio: 2,500:1 | Part No:107-725

### iVision 30 Series Digital Projectors




<b>Colour System:</b> 6 Segment RGBCWY Colour Wheel	<b>DMD Specification:</b> 1400 x 1050 pixels native. Fast transit pixels for smooth greyscale and improved contrast.
<b>Display Type:</b> 1 x 0.95" DarkChip™ DMD™	<b>Aspect Ratio:</b> 4x3 <b>Fill Factor</b> 87%

### Key Features

#### Video & Graphics Processing

- Auto mode selection - plug and play setup
- 10-bit color resolution
- HDMI 1.3a and dual link DVI digital inputs
- Full 10-bit deinterlacer with integral scaler

#### ColorMax™

- User Selection and storage of Primary and Secondary colour targets.

#### Source Compatibility:

HDTV  
NTSC  
PAL  
SECAM

### Inputs/Outputs

Video & Computer			Communication & Control		
Type	Connector	Qty	Type	Connector	Qty
DVI-D - Single Link DVI	DVI	1	LAN	RJ45	1
HDMI 1.3	HDMI	1	RS232	9-pin D Sub	2
VGA / Analog RGB	15-pin D-Sub	1	Service Port	USB Type B	1
Component Video	YPbPr	1	Wired Remote In	3.5mm Stereo Jack	1
S-Video	4-pin Mini DIN	1	Wired Remote Out	3.5mm Stereo Jack	1
Composite Video	RCA	1	12V Trigger	3.5mm Stereo Jack	2

#### 3D Formats Supported

Not applicable

#### HDTV Formats Supported

1080p (24Hz, 25Hz, 30Hz, 50Hz, 60Hz), 1080i (50Hz, 60Hz), 720p (50, 60Hz)

**Computer Compatibility**

Up to 1920 x 1200

**Bandwidth**

205 MHz on analog RGB

160 MHz on DVI

75 MHz on Component

**Remote Control**

Addressable IR remote control, wireless and wired with loop-through.

On-Board keypad

**Automation Control**

RS232

LAN

**Colour Temperature**

User selectable from 3200 to 9300K

**Lamp Type**

1 x 300 watt UHP VIDI lamp or 1 x 300 watt UHP lamp

**Typical Lamp Life**

Full Power: 2000 hours Non-Vidi: 1700

Eco Mode : 2500 hours Non-Vidi: 2200

**Lenses**

Lens	Part No.	Focus Range	Lens Shift
iVision 30sx+ XB 1.75 - 2.25:1	107-724V	1m - 15m	N/A
iVision 30sx+ XL 1.75 - 2.25:1	107-725V	1m - 15m	N/A
iVision 30sx+ XC 1.75 - 2.25:1	107-726V	1m - 15m	N/A
iVision 30sx+ W XB 1.0:1 fixed	107-727V	1.5m - 20m	N/A
iVision 30sx+ W XL 1.0:1 fixed	107-728V	1.5m - 20m	N/A
iVision 30sx+ W XC 1.0:1 fixed	107-729V	1.5m - 20m	N/A

**Lens Mount**

Fixed Offset

**Mechanical Mounting**

Front/Rear Table

Front/Rear Ceiling

Adjustable Front/Rear Feet

**Orientation****Table Top or Inverted:** Yes**Pointing Up:** Yes**Pointing Down:** Yes**Roll (Portrait):** +/-20° from horizontal**Power Requirements**

90-260 VAC, 50/60Hz

**Power Consumption**

350W

**Thermal Dissipation**

1700 BTU/Hour

**Fan Noise**

28dBA

**Operating/Storage Temperature**

Operating: 10° to 40° C

**Operating Humidity**

20% to 80% RH

**Weight (Chassis Only)**

3.4 kg

7.5 lb

**Dimensions**




L: 27.8 cm W: 29.94 cm H: 11 cm

L: 10.9 in W: 11.8 H: 4.4 in

**Safety & EMC Regulations**

CE, FCC Class A, UL, cUL and cCSAus

*\*Dimensions included for reference only and are subject to change. Please download the full set of CAD files for this display for more accurate information.*

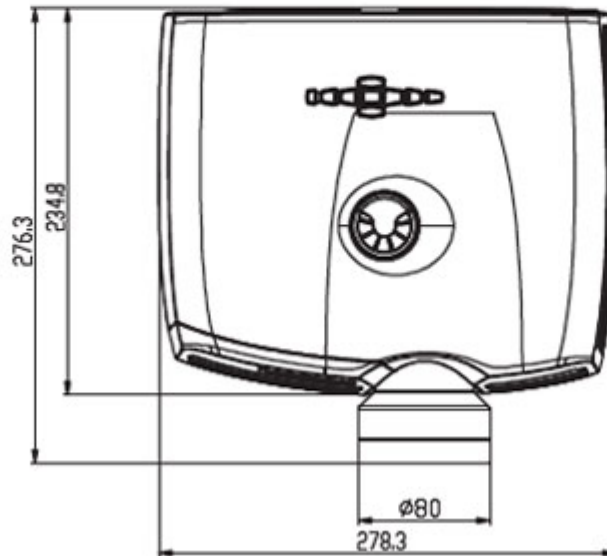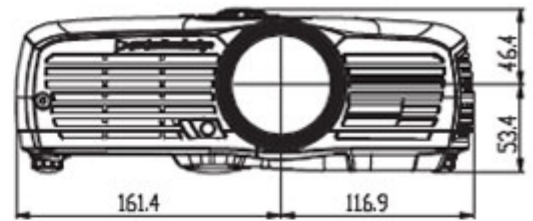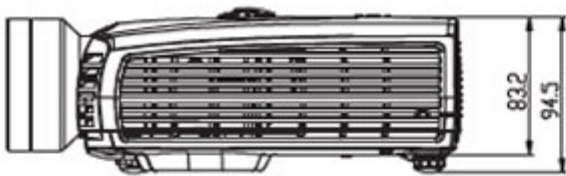

## Downloads

[PDF CAD Drawings](#)

[User Guides](#)

[AUTOCAD Drawings](#)

[Important Information](#)

---

Specifications subject to change without notice. Digital Projection version: 1 - 22-May-13 ©2012 Digital Projection. DLP®, Digital Light Processing™ and DMD are trademarks of Texas Instruments, Inc

---

**DIGITAL PROJECTION, INC** 55 CHASTAIN ROAD, SUITE 115 KENNESAW, GA. 30144  
T: 770.420.1350 | F: 770.420.1360 | [www.digitalprojection.com](http://www.digitalprojection.com)

**DIGITAL PROJECTION, LTD** GREENSIDE WAY, MIDDLETON MANCHESTER, UK. M24 1XX  
T: +44.161.947.3300 | F: +44.161.684.7674 | [www.digitalprojection.co.uk](http://www.digitalprojection.co.uk)

**DIGITAL PROJECTION, CHINA** TOWER C, RM C1202, CAI FU JIA YUAN, NO. 19 XIAO YING STREET, CHAOYANG DISTRICT BEIJING, PR CHINA 100101  
T: +86.10.58239771 | F: +86 10 58239770

**DIGITAL PROJECTION, ASIA** 16 NEW INDUSTRIAL ROAD, #02-10 HUDSON TECHNOCENTRE SINGAPORE 536204  
T: +65.6284.1138 | F: +65.6284.1238