



AN-1000X+ Speaker Monitor

A N C H O R°

Technical Specifications

Features

Reach Crowds of 250+

Bass & Treble Controls

RCA & 1/4" Line Inputs

MIC/LINE Configurable XLR Input

Magnetically Shielded


220 Volt CE-Compliant Model

Durable ABS Case - Black or White

Speaker Output Drives Companion Speaker



The AN-1000X+ is the most versatile powered monitor on the market. You can add it to an A/V rack setup, use it as a studio monitor, install it in a trade show booth, or place it in the Captain's quarters on a US Navy warship to monitor activities in the intelligence room.



Technical Specifications

 Rated Power Output
 50 watts continuous @ 4 Ω

 Max SPL @ Rated Power
 107 dB @ 1 meter

 Frequency Response
 65 Hz - 20 kHz ± 3 dB

 Frequency Response
 4.5" was feet 10 meters

Speaker Type 4.5" woofer, 10 mm dome tweeter
AC Power Regs. 110 – 125Vac, 50/60 Hz, 90W Max
208 – 240Vac, 50/60 Hz, 90W Max

Dimensions (HWD) 5.8" x 8.63" x 8.3" (14 x 22 x 21 cm)

Weight 9.5 lbs / 4.3 Kg

Enclosure Material ABS

Inputs Balanced

Line

Outputs Line Speaker microphone / line configurable, female

XLR, switchable phantom power Hi-Z, unbalanced, 1/4"-phone & RCA

Lo-Z, RCA, buffer isolated line-level 8Ω , unswitched, 1/4''-phone

(Features & Specifications Subject To Change Without Notice)

C E ROHS

ACCESSORIES

MIC-90 Professional dynamic,

cardioid pattern handheld

microphone

SC-50 50' Speaker cable
CC-100 Speaker/accessory bag
CC-100XL Speaker/accessory bag –

large

HC-ARMOR24-AN Anchor Armor hard case - Two

AN speaker monitors

CC-550 Speaker stand/accessory bag


SS-250 Speaker stand

MSB-201 Microphone stand with boom

SB-1 Stand mount

SB-3 Ceiling mount bracket*
SB-360 360° swivel wall bracket*

* Available with black or white finish

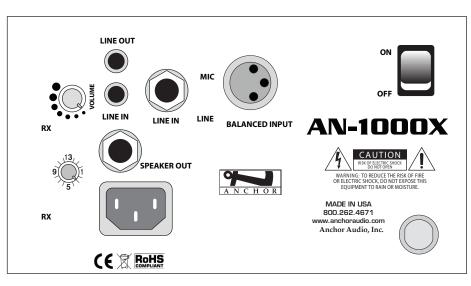

(AN-1000X Back Panel Shown)

Anchor Audio, Inc.