
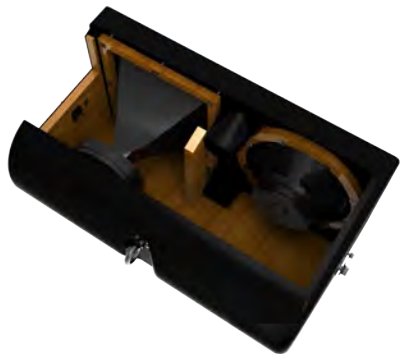


WET X 4-Part Enclosure Construction

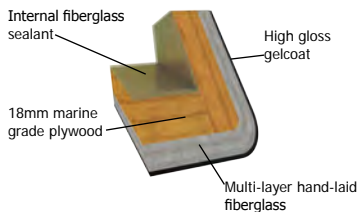

WET X enclosures feature sturdy internal lateral bracing, 18mm marine grade plywood, integrated 1/2"-13 rigging points, a safety cable mounting point, and Community's 3-layer Weather-Stop™ grilles.

APPLICATIONS

- Themed entertainment
- Stadium Systems
- Outdoor Night Clubs
- Water parks
- Amusement parks
- Outdoor entertainment centers
- Cruise ships
- Music pavilions
- Musical fountains

FEATURES

- Greater flexibility, higher output, smaller size than WET II
- Attractive architectural enclosures
- Passive or biamp operation
- Included color-matched 304 stainless steel mounting bracket
- Composite marine ply core
- Solid bass, uncolored premium quality music reproduction for demanding environments

Model	Drivers	Operating Range	Sensitivity	Power Handling (PGM)	Impedance	Dispersion (H x V)	Dimensions H x W x D
WX-1226	LF 1 x 12" HF 1 x 1.4"	40 Hz - 22 kHz	97 dB	1200W	8 ohms	120° x 60°	16 x 30.5 x 17 in. (406 x 775 x 432 mm)
WX-1264	LF 1 x 12" HF 1 x 1.4"	40 Hz - 22 kHz	98 dB	1200W	8 ohms	60° x 40°	16 x 30.5 x 17 in. (406 x 775 x 432 mm)
WX-1266	LF 1 x 12" HF 1 x 1.4"	40 Hz - 22 kHz	98 dB	1200W	8 ohms	60° x 60°	16 x 30.5 x 17 in. (406 x 775 x 432 mm)
WX-1294	LF 1 x 12" HF 1 x 1.4"	40 Hz - 22 kHz	97 dB	1200W	8 ohms	90° x 40°	16 x 30.5 x 17 in. (406 x 775 x 432 mm)
WX-1296	LF 1 x 12" HF 1 x 1.4"	40 Hz - 22 kHz	97 dB	1200W	8 ohms	90° x 60°	16 x 30.5 x 17 in. (406 x 775 x 432 mm)
WX-1299	LF 1 x 12" HF 1 x 1.4"	40 Hz - 22 kHz	97 dB	1200W	8 ohms	90° x 90°	16 x 30.5 x 17 in. (406 x 775 x 432 mm)
WX-1526	LF 1 x 15" HF 1 x 1.4"	40 Hz - 22 kHz	99 dB	1200W	8 ohms	120° x 60°	19.5 x 33.6 x 20.5 in. (495 x 854 x 521 mm)
WX-1564	LF 1 x 15" HF 1 x 1.4"	40 Hz - 22 kHz	98 dB	1200W	8 ohms	60° x 40°	19.5 x 33.6 x 20.5 in. (495 x 854 x 521 mm)
WX-1566	LF 1 x 15" HF 1 x 1.4"	40 Hz - 22 kHz	98 dB	1200W	8 ohms	60° x 60°	19.5 x 33.6 x 20.5 in. (495 x 854 x 521 mm)
WX-1594	LF 1 x 15" HF 1 x 1.4"	40 Hz - 22 kHz	99 dB	1200W	8 ohms	90° x 40°	19.5 x 33.6 x 20.5 in. (495 x 854 x 521 mm)
WX-1596	LF 1 x 15" HF 1 x 1.4"	40 Hz - 22 kHz	98 dB	1200W	8 ohms	90° x 60°	19.5 x 33.6 x 20.5 in. (495 x 854 x 521 mm)
WX-1599	LF 1 x 15" HF 1 x 1.4"	40 Hz - 22 kHz	98 dB	1200W	8 ohms	90° x 90°	19.5 x 33.6 x 20.5 in. (495 x 854 x 521 mm)
WX-218SDF	LF 2 x 18"	35 Hz - 500 Hz	103 dB	2800W	4 ohms	360° x 180°	30.8 x 49.8 x 24.3 in. (781 x 1265 x 618 mm)