

# repel™

O I L & G R E A S E R E S I S T A N T  
R U B B E R F L O O R I N G



- 1 Part of the actual rubber formulation, not a surface treatment that will wear off**
- 2 Oil and grease resistant**
- 3 Does not become blistered and marred like many other rubber products**
- 4 Quiet, comfortable under foot**
- 5 Slip resistant**



EnviroFlex™ product. May contribute to one or more LEED® credits.



Some floors need to work a lot harder than others. For instance, in commercial kitchens, automotive centers and machine shops, the presence of oil and grease can cause special challenges. That's where you need FLEXCO®'s Repel™ rubber flooring.

Repel is available in all rubber tile and stair tread colors, excluding sheet rubber. Repel must be specified at time of order. Do not use around hot grease areas.



**FLEXCO®**

innovative design. flooring performance.

repeL™

C O L O R S    order prefix: **R**

RepeL is available in all rubber tile and stair tread colors, excluding sheet rubber.

updated  
flextones palette

flextones®  
C O L O R S



See page 15  
for all 30 colors  
available

evolving styles®  
creative elements

C O L O R S



See page 17  
for all 16 colors  
available


evolving styles®  
wood elements

C O L O R S




See page 19  
for all 4 colors  
available

spextones®  
C O L O R S







See page 21  
for all 22 colors  
available

## For flextones®, evolving styles® + spextones® color palettes

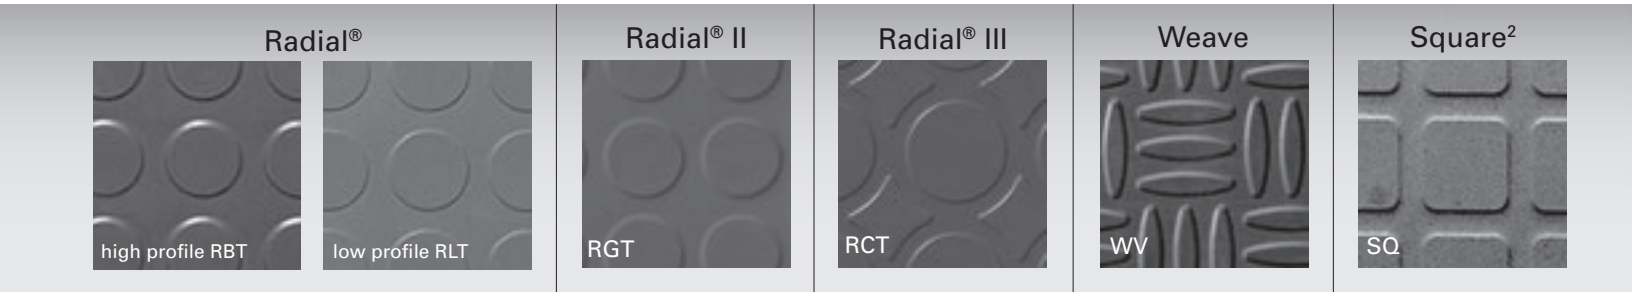


	Radial® (RBT/RLT)	Radial® II (RGT)	Radial® III (RCT)	Weave (WV)	Square² (SQ)
GAUGE	1/8"	1/8"	1/8"	1/8"	1/8"
SIZE	18" x 18"	18" x 18"	18" x 18"	18" x 18"	18" x 18"
PIECES /CTN	20	20	20	20	20
WEIGHT /CTN (LB)	46	46	46	46	46
SQ. FT /CTN	45	45	45	45	45



Hammered



Smooth



(evolving styles® + spextones® colors only)

GAUGE	Hammered (SE)				1/8" Smooth †			.100" Smooth †		
	.080"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	.100"	.100"	.100"
SIZE	24" x 24"	12" x 12"	18" x 18"	36" x 36"	12" x 12"	18" x 18"	36" x 36"	12" x 12"	18" x 18"	36" x 36"
PIECES /CTN	20	45	20	6	45	20	6	60	25	8
WEIGHT /CTN (LB)	60	46	46	62	52	52	62	56	53	68
SQ FT /CTN	80	45	45	54	45	45	54	60	56.25	72
					1/8" Smooth Rolls			.100" Smooth Rolls		
					36" x 25' (8 Sq Yds/Roll; 10.8 Lbs./Sq Yd)			36" x 25' (8 Sq Yds/Roll; 8.5 Lbs./Sq Yd)		
					48" x 25' (11 Sq Yds/Roll; 10.8 Lbs./Sq Yd)			48" x 25' (11 Sq Yds/Roll; 8.5 Lbs./Sq Yd)		



\* Special orders for lengths greater than 25'.  
 † Sheet rubber manufactured untrimmed must be double-cut on the job site.  
 \*\* IMO and Repel formulation not available in sheet.  
 Note: Add HW to color number for pre-grooved Heat Weld tiles available in 36" x 36" x 1/8" gauge.



**Rubber Flooring Adhesive Options**  
 2100 Spray-Grip™ Adhesive for Rubber Tile  
 3100 Rubber Tile & Tread Adhesive  
 7100 Low Viscosity Epoxy Adhesive  
 7200 Urethane Epoxy Adhesive


# sports + multipurpose flooring



## tuflex® force™ order prefix: **TF**

GAUGE	3/8"
SIZE	Square: 27" x 27" (5.0625 Sq/Ft per tile) Interlocking Tiles: 27" x 27" (4.6046 Sq/Ft per tile)
PACKAGING	Maximum 100 tiles per pallet
WEIGHT	11 lbs per piece

### Interlocking Tile

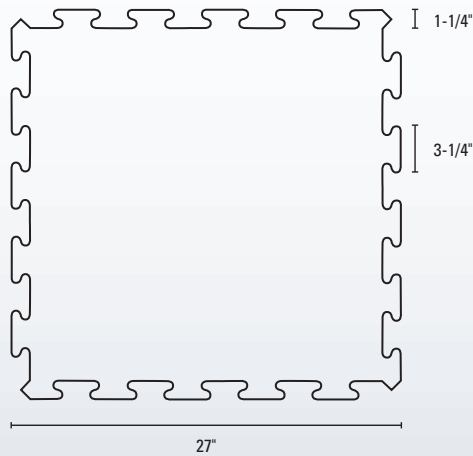

#### Adhesive Options


- 2100 Spray-Grip™ Adhesive for Rubber Tile (special limitations; see Tuflex®Force™ technical documents online for details)
- 6100 Sports Floor Adhesive
- 7100 Low Viscosity Epoxy Adhesive
- 7200 Urethane Epoxy Adhesive

## prime sports™ order prefix: **PSF**

GAUGE	5/32", 1/4", 3/8", 1/2"
SIZE	Rolls: 48" x 49.5' (22 Sq/Yds, 198 Sq/Ft) Square Edge Tiles: 36" x 36" (9 Sq/Ft per piece) Interlocking Tiles: 36" x 36" (8.2 Sq/Ft per piece)
PACKAGING	Unboxed tiles and rolls shrink wrapped and put on pallet

Material may contain skiving marks from the manufacturing process; FLEXCO® does not consider these defects unless they are excessive in nature. Installation of material containing these skive marks is considered acceptance of the material and therefore waiving the right of replacement except under special circumstances determined by FLEXCO®.

### Interlocking Tile

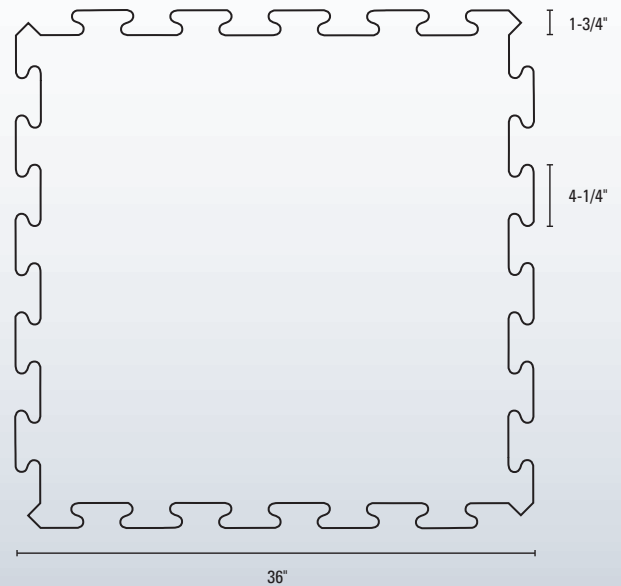

#### Adhesive Options

- 2100 Spray-Grip™ Adhesive for Rubber Tile (special limitations; see Prime Sports™ technical documents online for details)
- 6100 Sports Floor Adhesive
- 7100 Low Viscosity Epoxy Adhesive
- 7200 Urethane Epoxy Adhesive



**flextuft®** order prefix: **FT**

SIZE	12" x 12"
VULCANIZED GAUGE	3/8" nominal
NON-VULCANIZED GAUGE	3/8" nominal
PIECES /CTN	25
WEIGHT /CTN (LB)	
VULCANIZED	50
NON-VULCANIZED	52
SQ FT /CTN	25

Note: Add V or NV to the product number for vulcanized or non-vulcanized tile (e.g., FTNV-1 for FlexTuft® Tweed Non-Vulcanized tile).

While various environmental conditions may alter the appearance of recycled raw materials used in FlexTuft® flooring, the effects are not necessarily undesirable. When exposed to direct sunlight and other elements, fading will occur.

**Adhesive Options**

- 3100 Rubber Tile & Tread Adhesive\*
- 6100 Sports Floor Adhesive
- 7100 Low Viscosity Epoxy Adhesive
- 7200 Urethane Epoxy Adhesive

\*3100 for indoor use only

**sports + multipurpose  
flooring cleaners,  
sealers + strippers**

The following floor care products must be used with Tuflex® Force™ and are also available for Prime Sports Floor.



TC-1 Cleaner



TC-2 Sealer & Finish



TC-3 Finish Stripper